



## 600-S

© EBELCO COPYRIGHT 2019.

### FEATURES :



- ✓ Dual Voltage Selectable (12 VDC / 24 VDC)
- ✓ Low Current Consumption
- ✓ Reliable Holding Force
- ✓ Durable & Silence Operation
- ✓ Cosmeticize Anodized Aluminum Casing
- ✓ Surge & Spike Protection PCB
- ✓ Anti-Tamper Jam Nuts
- ✓ Full Range of Optional Brackets
- ✓ Anti Residual Magnetism Kick Off Button

### SPECIFICATIONS :

- 1 **Voltage Input :** 12 VDC / 24 VDC
- 2 **Current Draw :** 12V / 480mA ; 24V / 240mA (±5%)
- 3 **Holding Force :** Up to 600 lbs (272 kg)
- 4 **Anti-Rust Surface Treatment :** Blue Zinc Plating
- 5 **Operating Temperature :** 0~55° C (32~131° F)
- 6 **Operating Humidity :** 0~95% (non condensing)
- 7 **Weight :** 1.90 kg (±1%)
- 8 **Dimensions :** Magnet - (L)250x(W)42x(T)25 mm  
Armature - (L)180x(W)38x(T)11 mm

**EBELCO** electromagnetic lock **600** series are known with its excellent holding force and remarkable features.

The series compliance to **UL, CE** and **PSB Test** are manufactured under the highest quality control to achieve the commitment to customer who always satisfied with the maximum quality and reliability.

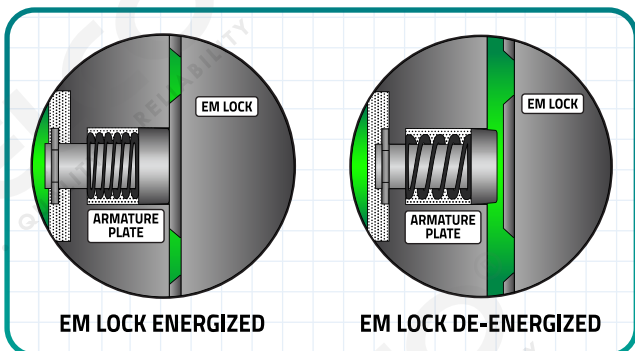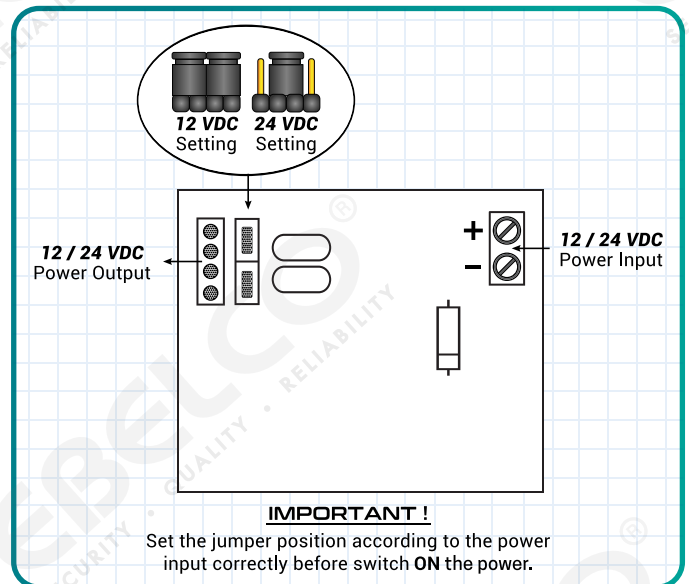

### \*Disclaimer :

**EBELCO** reserve the right to go ahead with any modifications of the models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.

CE c RoHS

