

# GP AUTO-DRAIN SOLENOID VALVE

## EZ-1

Timer controlled condensate drain



### PRODUCT FEATURES

The EZ-1 is designed to remove condensate from compressors, compressed air dryers and receivers up to any size, type or manufacturer.

The EZ-1 offers true installation simplicity at the lowest possible cost. The EZ-1 is a mass produced product available in various valve connection sizes and timer colour options.

### COMMERCIAL BENEFITS


- Does not air-lock during operation
- Compressed air systems up to any size
- Suitable for all types of compressors
- TEST (micro-switch) feature

### TECHNICAL ADVANTAGES

- Simple to install
- Direct operated valve – not diaphragm type
- The direct acting valve is serviceable
- Viton seals

# GP AUTO-DRAIN SOLENOID VALVE

## PRODUCT DIMENSIONS

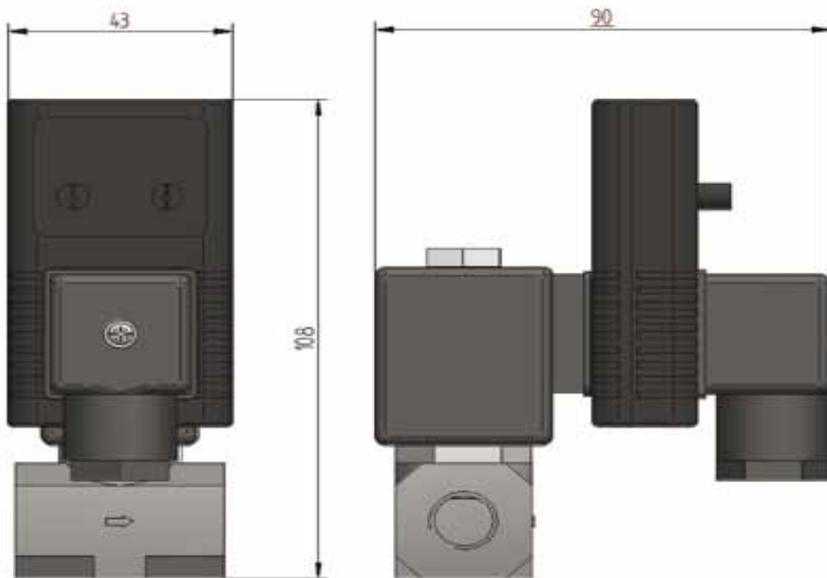

## PRODUCT SPECIFICATIONS

Maximum compressor system capacity	Unlimited
Valve connection options	1/2", 3/8" and 1/4" BSP and NPT
Minimum system pressure	0 bar
Maximum system pressure	16 bar
Minimum medium temperature	2°C
Maximum medium temperature	50°C
Valve orifice	4.0 mm
Type of operating valve	Direct acting
Valve seals	FPM (Viton)
Installation enclosure	IP65/NEMA 4
Voltage range options	24 to 230VAC/DC 50/60 Hz.
Time cycle range (ON - OFF)	0.5/10 seconds – 0.5/45 minutes

## WHERE TO INSTALL

