


SPECIFICATION

- Two-Piece-Body ANSI-150 Flange End
- Standard Valve Seat R-PTFE
- End Connection: ANSI-150
- Dimension: ASME B16.5 B16.10
- Inspection & Test: API 598
- Design: ANSI B16.34

APPLICATIONS

- Suitable for Water, Oil, Gas, Air & Steam
- Working Temperature up to 180 °C

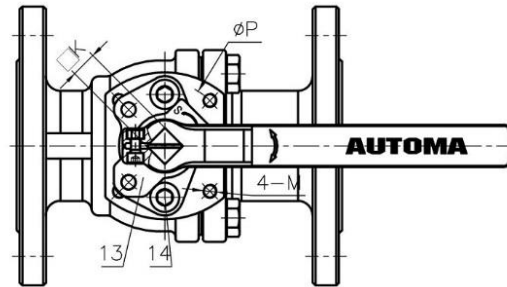

#AT226F / 227F / 228F - WCB / SS304 / SS316 BODY

MATERIAL LIST

NO.	PART NAME	MATERIAL		
		AT226F	AT227F	AT228F
1	Body	WCB	CF8	CF8M
2	Seat	RPTFE	RPTFE	RPTFE
3	Ball	SS304	SS304	SS316
4	Gasket	RPTFE	RPTFE	RPTFE
5	Bolt	A193 B7	SS304	SS316
6	Bonnet	WCB	CF8	CF8M
7	Stem	SS304	SS304	SS316
8	Stem Washer	RPTFE	RPTFE	RPTFE
9	Packing	RPTFE	RPTFE	RPTFE
10	Gland	SS304	SS304	SS304
11	Snap Ring	SS304	SS304	SS316
12	Handle	SS201/304	SS201/304	SS201/304
13	Stopper	SS304	SS304	SS304
14	Bolt	A193 B7	SS304	SS304

The specification and dimensions are subject to change without prior notice!

DIMENSIONS (mm)

Size	Inch	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	5	6	8
	DN	15	20	25	32	40	50	65	80	100	125	150	200
L		108	117	127	140	165	178	190	203	229	356	394	457
H		81	84	91	95	118	126	137	162	188	-	-	-
W		130	130	160	160	200	200	240	270	320	550	650	800
FLANGE	Ø D	90	100	110	115	125	150	180	190	230	255	280	345
	Ø D1	60.3	69.9	79.4	88.9	98.4	120.7	139.7	152.4	190.5	215.9	241.3	298.5
	Ø D2	34.9	42.9	50.8	63.5	73.0	92.1	104.8	127.0	157.2	185.7	215.9	269.9
	C	10	11	12	13	15	16	18	19	24	24	26	29
	f	2	2	2	2	2	2	2	2	2	2	2	2
	n - Ød	4-Ø16	4-Ø16	4-Ø16	4-Ø16	4-Ø16	4-Ø19	4-Ø19	4-Ø19	4-Ø19	8-Ø19	8-Ø22	8-Ø22
ISO 5211	K	9	9	11	11	14	14	14	17	17	21	21	27
	M	M5	M5	M6	M6	M8	M8	M8	M10	M10	M10	M12	M12
	Ø P	42	42	50	50	70	70	70	102	102	102	125	125
	ISO	F04	F04	F05	F05	F07	F07	F07	F10	F10	F10	F12	F12
Weight (kg)		1.83	2.33	2.89	4.14	5.42	7.37	11.70	14.50	23.50	31.80	49.50	L/G

