
# Air Regulator for High Pressure (SAR)

### SAR200H~600H Series

 Highly durable materials are used in the manufacturing of air regulators intended for high pressure operation.



### How to order

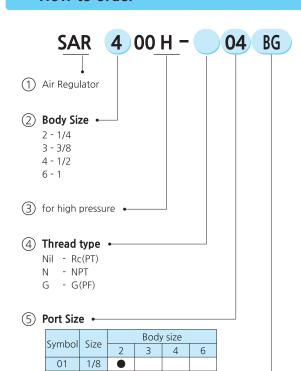

#### (6) Accessory(Optional) •

1/4

3/8

1/2

3/4

Nil - None Bracket / None Gauge(Adapter Only)

B - Bracket

02

03

10

- Gauge(Round type)

### **Symbol**



## **Specification**

Fluid	Compressed Air				
Max. supply pressure	30bar (3MPa)				
Max. operating pressure	20bar (2MPa)				
Ambient and Media temp.	-5∼60° (No freezing)				
Regulating range	1~17bar (0.1~1.7MPa)				
Gauge port	SAR200H	SAR300H	SAR400H	SAR600H	
	1,	/8	1/4		
Construction	Relief type				

#### **Precautions**

- 1 Set the outlet pressure range for the regulator in a range that is 85% or less of the inlet pressure. If set above 85%, the inlet pressure will be easily effected by fluctuations in the flow rate and inlet pressure, and will become unstable.
- (2) To set the pressure using the knob, turn the knob in the direction that increases pressure and lock the knob after the pressure is set. If this is done in the direction that decreases pressure, the pressure may drop from the original set pressure. Turning the knob clockwise increases the outlet pressure, and

turning it counterclockwise reduces the pressure

- (3) Please contact SKP when a circuit requires the use of a regulator having relief sensitivity with high precision and setting accuracy.
- 4 Residual pressure release (outlet pressure release) is not complete by releasing the inlet pressure. To release residual pressure, select a model with a back flow mechanism.

SAU

SAU LARGE FLOW

SAU HIGH PRESS

SAW

SAW HIGH PRESS.

**SAWM SAWD** 

SAF

SAF LARGE FLOW

**SAFM SAFD** 

SAR

SAR LARGE FLOW

SAR T-HANDLE

SRP

SAL

SAL LARGE FLOW

AUTO-DRAIN KITS

SHVS

SPS100

**ACCESSORY** 


CAUTION


## Series SAR200H~600H

## **DIMENSIONS (mm)**


**SAR 200H** 

■ SAR200H-□02□□





■ Dimensions of each model with an option attached




Option	<b>G</b> : Round type Gague	<b>B</b> : Bracket				
Model	Gh40, R1/8	B220				

## Air Regulator for High Pressure

### **DIMENSIONS (mm)**

### SAR 300H~400H

■ SAR300H□-□03□□ SAR400H□-□04(06)□□

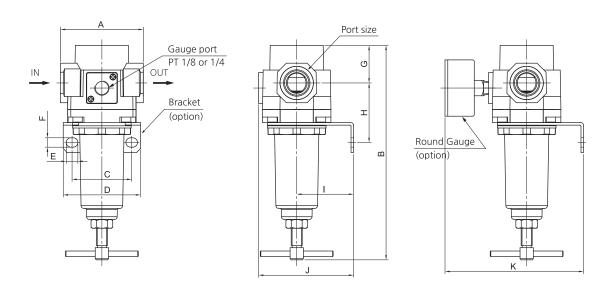

Option	<b>G</b> : Round type Gauge	<b>B</b> : Bracket
Model		
	SAR300H : Gh40, R1/8 SAR400H : Gh50, R1/4	SAR300H: B320 SAR400H: B420

Model	Port size	Α	В	С	D	Е	F	G	Н	ı	J	K
SAR300H-03	3/8	57	164	40	53	8	6.5	28.4	45.7	41	72	107
SAR400H-04	1/2	75	188	54	70	10.5	8.5	34	54	50	86	127
SAR400H-06	3/4	75	190	54	70	10.5	8.5	34.5	55.5	50	86	127

SAU

SAU LARGE FLOW

SAU HIGH PRESS.

SAW

SAW HIGH PRESS.

SAWM SAWD

SAF

SAF LARGE FLOW

SAFM SAFD

SAR

SAR LARGE FLOW

T-HANDLE

SAR HIGH PRESS

SRP

SAL

. . \_

SAL LARGE FLOW

AUTO-DRAIN KITS

SHVS

SPS100


ACCESSORY


CAUTION

## **DIMENSIONS (mm)**


**SAR 600H** 

■ SAR600H□-□06□□ SAR600H□-□10□□





■ Dimensions of each model with an option attached



Option	<b>G</b> : Round type Gauge	<b>B</b> : Bracket				
Model	Gh50, R1/4	B600				