

GD-7602/7603/7604


T-shirt Digital Heat Transfer Systems




Grando Transfer Pigment Ink




Two I3200 Heads

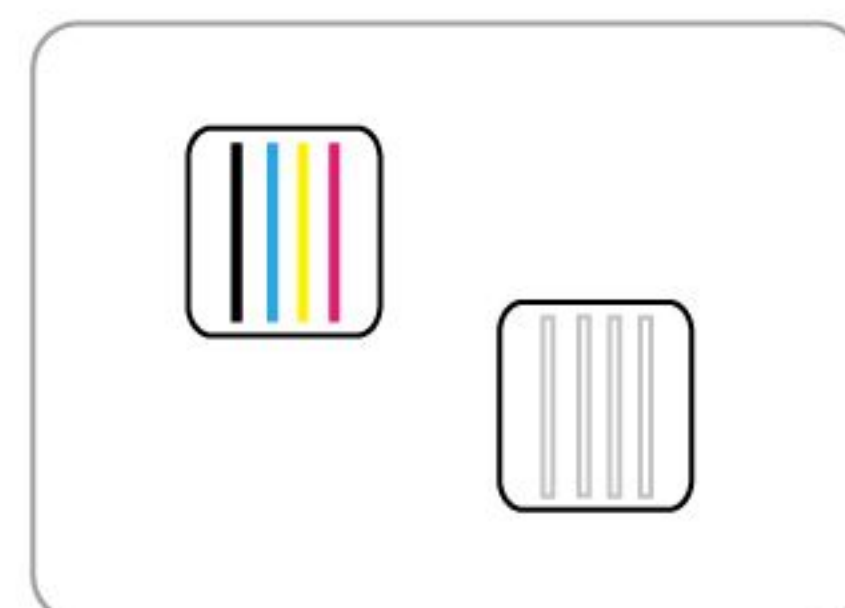

Three I3200 Heads

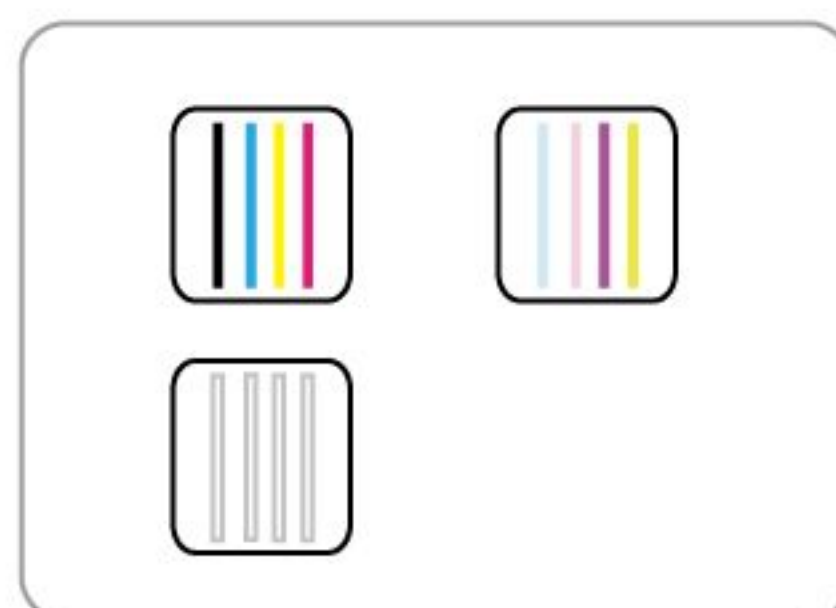

Four I3200 Heads

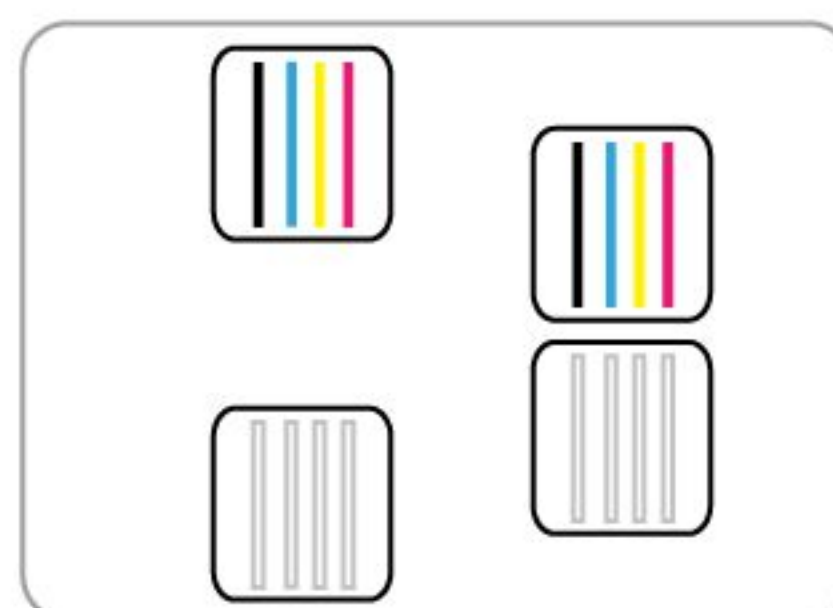

* Dual/Three I3200 Print Heads Speed

360x1800dpi - 4pass	10 m ² /h
720x1200dpi - 6pass	7 m ² /h
720x1800dpi - 8pass	4 m ² /h

● Technical Specifications

Model	GD-7602	GD-7603	GD-7604			
Print Head	Double I3200 Print Heads	Three I3200 Print Heads	Four I3200 Print Heads			
Printing Technology	Piezoelectric Inkjet					
Acceptable Media	Width	29.9 in.(760 mm)				
	Thickness	Maximum 39 mil(1 mm)				
Printing Width	28.7 in.(730 mm)					
Ink Cartridges	Type	Transfer Pigment Ink				
	Capacity	Continual Ink Supply System (220ML)				
	Color	CMYK+W	CMYK,LC,LM,FY,FM+W	CMYK+W		
Speed	4 Pass (360*1800dpi)	10 m ² /h	4 Pass (360*1800dpi)	10 m ² /h	4 Pass (360*1800dpi)	20 m ² /h
	6 Pass (720*1200dpi)	7 m ² /h	6 Pass (720*1200dpi)	7 m ² /h	6 Pass (720*1200dpi)	14 m ² /h
Applicable Media	Transfer film					
Color Manage	ICC or density curve					
Media Heating System	Powder & color fixing machine					
Interface	RJ-45/LAN					
RIP Software	Main top					
Power Supply	50HZ/60HZ,220V/110V/10A					
Environment	Temperature	10℃ to 38℃				
	Humidity	40% to 70%				
Printer Dimensions(with stand)	L2100mm*W1200mm*H1800mm					
Printer Dimensions	L2123mm*W1210mm*H1337mm					
Weight	G.W:	275kg	N.W:	225kg		

Shaking Powder and Color Fix Machine

Model	D650(Belt Systems)
Media Width	0-600mm
Applicable Media	Nylon, Chemical Fiber, Cotton, Leather, Swimwear, Wetsuit, PVC, EVA, etc.
Powder Control	Powder shake control, powder control, powder direction and volume control
Heating & Drying Function	Multi-stage heating system, drying, cold air fan function
Rewind Function	Automatic induction winding
Electrical Parameters	Rated Voltage: 220V Rated Current: 20A
	Rated Power: 3.42KW Power Consumption: 1KW-2.5KW
Packing Size & Weight	1367mm, Standad with four print heads: 2900*1310*1367mm G.W: 275kg N.W: 225kg


Cotton T-shirt Print



Imported mute guide rail, low noise and high precision.




Stable bulk system ensures amazing printing speed.

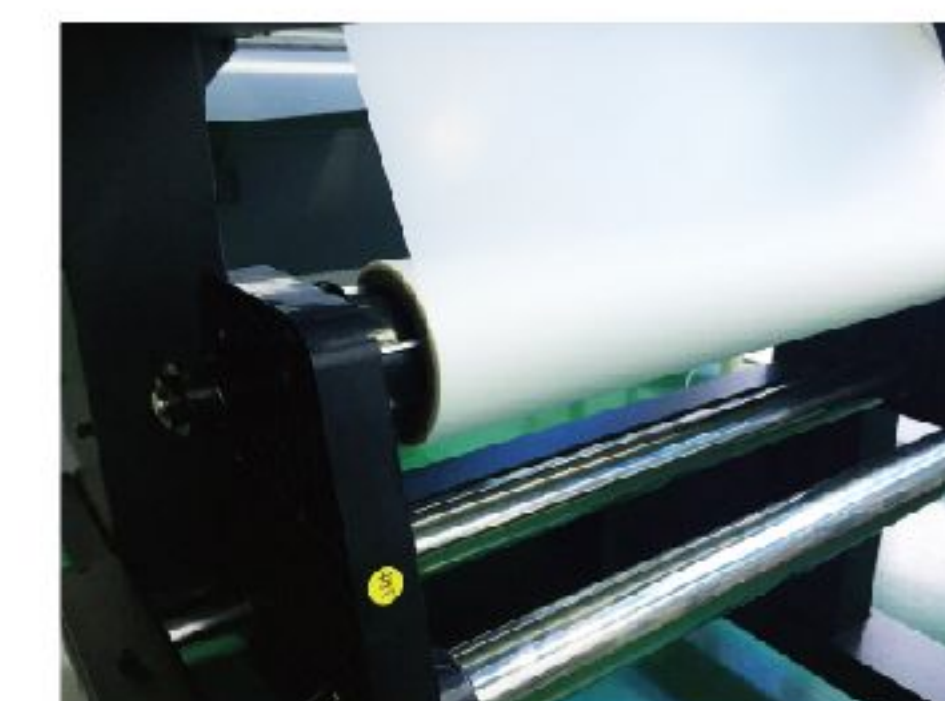

High-performance take up device, suitable for various media.



High quality hot melt powder, can be used repeatedly.

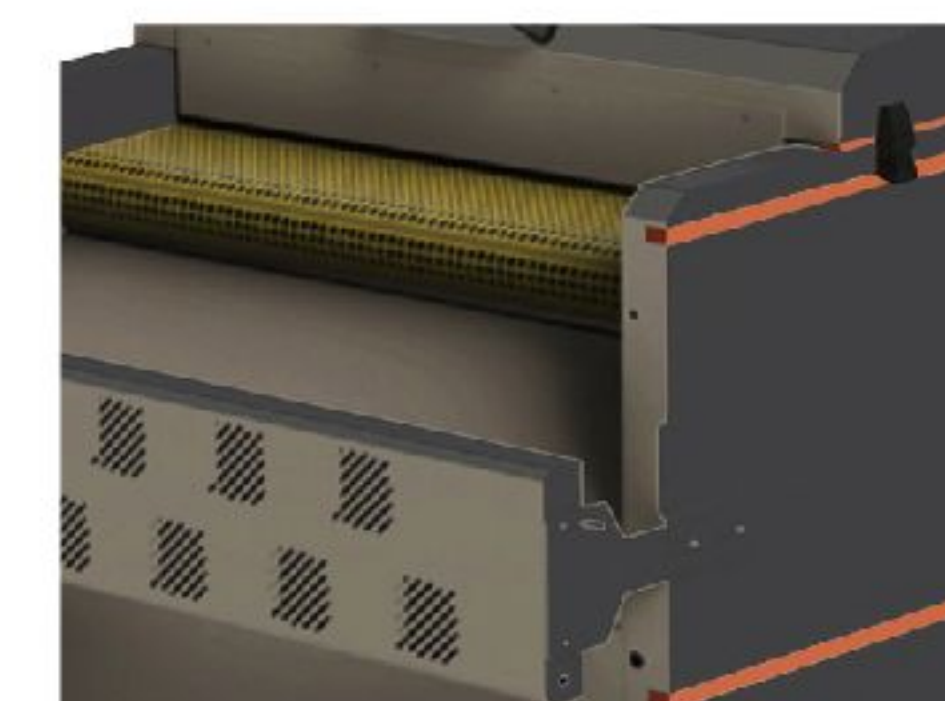


With belt system, you can cut off files, while printing. Since the film is fed by air suction system.



Efficient powder shaking device, powder shaking is clean.



THK high-precision mute rail.

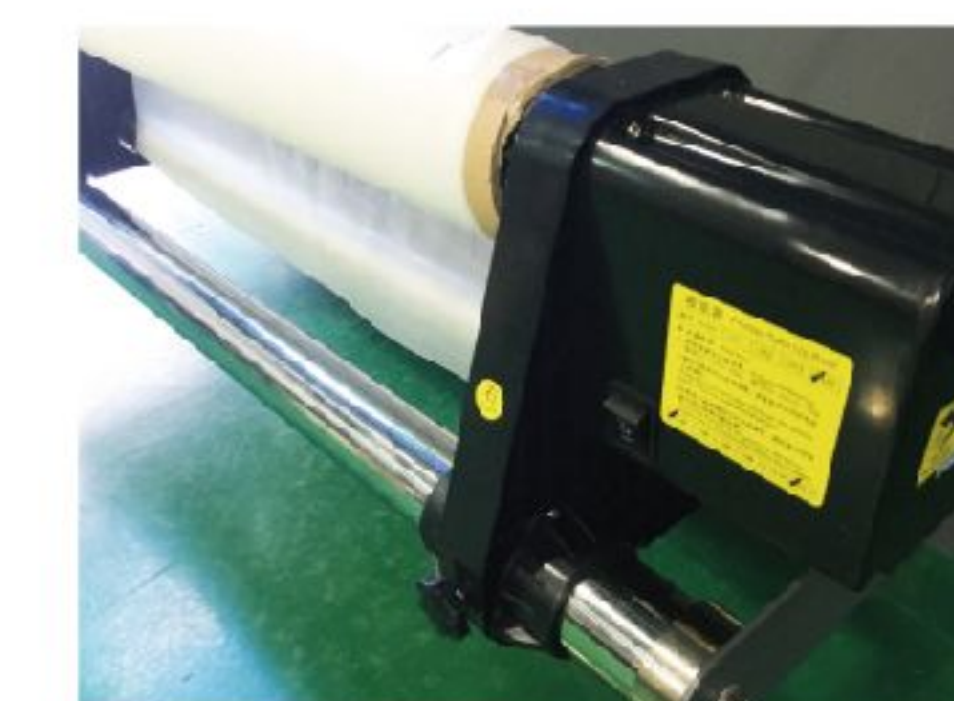

External power supply, intelligent rolling system.