sofanne Product Technical Specifications

lametos **č**

ECBT-PTA3

Earthing and short-circuit equipment – Low voltage electric panels

Functionality

5-38 mm

0-38 mm

4

. Birthan el Earthing and short-circuit kit for low-voltage distribution boards. The main reason for their installation is to protect the worker from accidental power-on or return of voltage during repair work.



ECBT-PTA3 Earthing and short-circuit equipment – Low voltage electric panels

!

Product Features

The isolated PTA clamps are used to ground the electrical panels. These clamps can cover an opening distance of between 8 and 22mm, hexagonal and cylindrical sections.

Composed of

- •! 3 insulated PTA earth clamps.
- •! 3 copper PVC-insulated cables 25 mm² section and 0.4 m long for short circuit of phases.
- 1 cooper PVC-insulated cables 25 mm² section and 1 m long for earthing.
- •! 1 branch-joint connector (4 cables).
- •! 1 TT-38A earthing lathe.
- •! 1 plastic case for storage and transport.

Certified


According to the Standard IEC 61230.



PTA



TT-38A

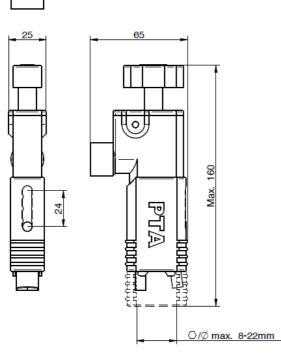

Datos sujetos a cambios 2017, Mayo 2 © 2017 Sofamel SLU Todos los derechos reservados.

Versión: R2-7.2 COM01

Las especificaciones están sujetas a cambios sin previo aviso.



Thomas Alva Edison, 16-17 - Pol. Industrial Plans d'Arau - 08787 La Pobla de Claramunt (Barcelona) - Spain Tel. +34 93 808 79 80 - Info@sofamel.es www.sofamel.com!