



# LOCTITE® 5572™

February 2008

## PRODUCT DESCRIPTION

LOCTITE® 5572™ provides the following product characteristics:

<b>Technology</b>	MS® - Polymer
<b>Chemical Type</b>	Modified silane polymer
<b>Appearance (uncured)</b>	Black paste <sup>LMS</sup>
<b>Components</b>	One part - requires no mixing
<b>Viscosity</b>	Paste
<b>Cure</b>	Atmospheric moisture
<b>Application</b>	Sealing or Bonding

LOCTITE® 5572™ is a high strength, high modulus adhesive used for elastic bonding and sealing on various substrates. It is a high viscosity, sag-resistant one component adhesive based on a modified silane polymer, which cures to an elastomeric thermoset product. The skin formation and curing times are dependent on humidity, temperature, and joint depth. By increasing the exposure to moisture these times can be reduced. LOCTITE® 5572™ is sag resistant leading to high initial tack. It is non-corrosive and free of solvents, isocyanates, silicones, PVC, and is odorless. It demonstrates good adhesion to a wide variety of substrates and is compatible with suitable paint systems. The sealant also demonstrates good UV resistance and can therefore be used for interior and exterior applications.

## TYPICAL PROPERTIES OF UNCURED MATERIAL

Density, ISO 2811-1 @ 22 °C, g/ml 1.32 to 1.42<sup>LMS</sup>  
 Flash Point - See MSDS  
 Extrusion Rate @ 23°C, D=3.5mm, 3 bar, 15 s, g 5 to 30<sup>LMS</sup>

## TYPICAL CURING PERFORMANCE

Under normal conditions, the atmospheric moisture initiates the curing process. The product develops functional strength in 24 hours and fully cures in 7 days.


### Skin Over Time

Skin over time is the time the surface of the adhesive forms a skin upon exposure to atmospheric moisture at 25 ± 2 °C, 50 ± 5% RH.

Skin Over Time, minutes 6 to 20<sup>LMS</sup>

### Cure Speed vs. Time


The graph below shows the shear strength developed over time at 22 °C / 50 % RH on mild steel (grit blasted) and tested according to ISO 4587.

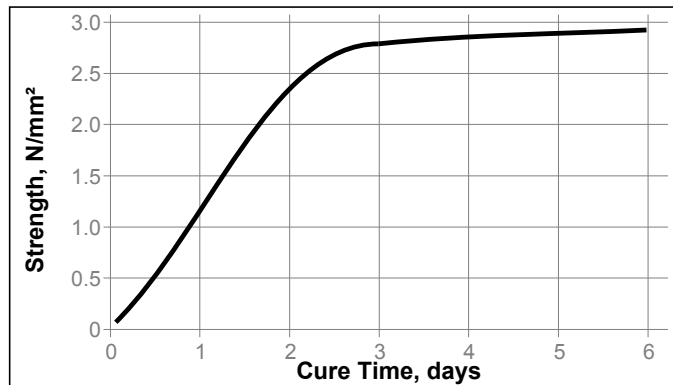

## Depth of Cure

The depth of cure depends on temperature and humidity. Depth of cure was determined by filling a 51 mm deep cup and removing the cured film of material. The cured section of product is measured to determine depth of cure.

The graph below shows the increase in depth of cure with time at @ 22 °C / 40 to 60% RH

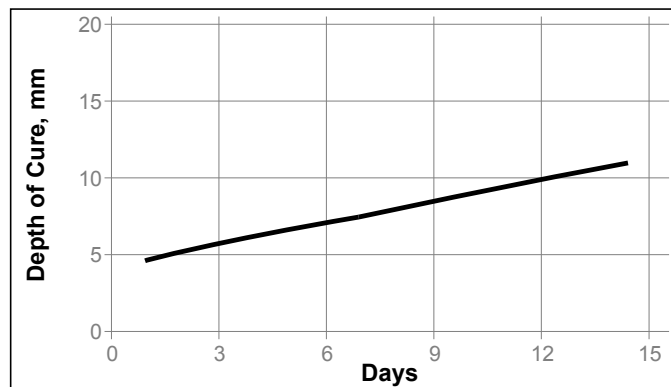

## TYPICAL PROPERTIES OF CURED MATERIAL

Cured for 3 days @ 22 °C / 50±5 % RH

### Physical Properties:

Shore Hardness, ISO 868, Durometer A	50 to 60 <sup>LMS</sup>
Elongation, at break, ISO 527-3, %	225
Tensile Strength, ISO 527-3	N/mm <sup>2</sup> 3.3 (psi) (475)

### Electrical Properties:

Dielectric Constant , IEC 60250:	
1kHz	11.96
100 kHz	10.77
1 MHz	10.33

Volume Resistivity, IEC 60093, Ω·cm	3.4×10 <sup>10</sup>
Surface Resistivity, IEC 60093, Ω	2.4×10 <sup>12</sup>



**TYPICAL PERFORMANCE OF CURED MATERIAL****Adhesive Properties**

Cured for 21 days @ 22 °C

Lap Shear Strength, ISO 4587:

Steel (grit blasted)	N/mm <sup>2</sup>	2.9
	(psi)	(425)
Stainless Steel	N/mm <sup>2</sup>	3.1
	(psi)	(455)
Galvanized Steel	N/mm <sup>2</sup>	2.5
	(psi)	(365)
Aluminum	N/mm <sup>2</sup>	1.5
	(psi)	(220)
Zinc dichromate	N/mm <sup>2</sup>	3.4
	(psi)	(490)
Wood (Pine)	N/mm <sup>2</sup>	2.2
	(psi)	(325)
Glass	N/mm <sup>2</sup>	3.5
	(psi)	(500)
Polycarbonate	N/mm <sup>2</sup>	1.8
	(psi)	(255)
PVC	N/mm <sup>2</sup>	2.3
	(psi)	(330)
ABS	N/mm <sup>2</sup>	1.2
	(psi)	(175)
Nylon	N/mm <sup>2</sup>	2.2
	(psi)	(315)

"T" Peel Strength, ISO 11339:

Aluminum	N/mm	3.1
	(lb/in)	(17.5)

Impact Strength, ISO 9653, J:

Aluminum	1.72
----------	------

**TYPICAL ENVIRONMENTAL RESISTANCE**


Cured for 21 days @ 22 °C / 40 to 60% RH

Lap Shear Strength, ISO 4587:

Mild steel (grit blasted)

**Hot Strength**

Tested at temperature

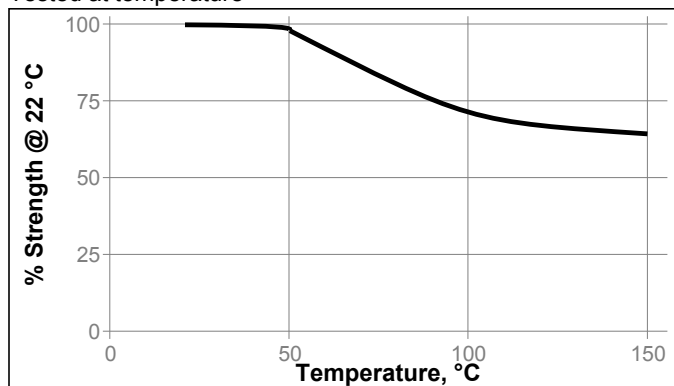**Chemical/Solvent Resistance**

Aged under conditions indicated and tested @ 22 °C.

Environment	°C	% of initial strength	
		500 h	1000 h
Motor oil	40	116	112
Gasoline	22	47	27
Isopropanol	22	61	16
Salt fog, 95% RH	49	85	97
85% RH	85	102	87

**Heat Aging**

Cured for 21 days @ 22 °C / 40 to 60% RH:

Aged @ 50 °C for 168 hours:

Change in Durometer, Points (Initial = 59)	1
Change in Tensile Strength, %	-6
Change in Elongation, %	-9

Aged @ 100 °C for 168 hours:

Change in Durometer, Points (Initial = 59)	-6
Change in Tensile Strength, %	-8
Change in Elongation, %	24

**GENERAL INFORMATION**

**This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials**

**For safe handling information on this product, consult the Material Safety Data Sheet (MSDS).**

**Directions for use**

1. For best performance bond surfaces should be clean and free from grease.
2. Moisture curing begins immediately after the product is exposed to the atmosphere, therefore parts to be assembled should be mated within a few minutes after the product is dispensed.
3. The bond should be allowed to cure (e.g. seven days), before subjecting to heavy service loads.
4. Excess material can be easily wiped away with non-polar solvents.

**Loctite Material Specification<sup>LMS</sup>**

LMS dated February 22, 2006. Test reports for each batch are available for the indicated properties. LMS test reports include selected QC test parameters considered appropriate to specifications for customer use. Additionally, comprehensive controls are in place to assure product quality and consistency. Special customer specification requirements may be coordinated through Henkel Quality.

**Storage**

Store product in the unopened container in a dry location. Storage information may be indicated on the product container labeling.

**Optimal Storage: 8 °C to 21 °C. Storage below 8 °C or greater than 28 °C can adversely affect product properties.**

Material removed from containers may be contaminated during use. Do not return product to the original container. Henkel Corporation cannot assume responsibility for product which has been contaminated or stored under conditions other than those previously indicated. If additional information is required, please contact your local Technical Service Center or Customer Service Representative.

**Conversions**

$(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$

$\text{kV/mm} \times 25.4 = \text{V/mil}$

$\text{mm} / 25.4 = \text{inches}$

$\mu\text{m} / 25.4 = \text{mil}$

$\text{N} \times 0.225 = \text{lb}$

$\text{N/mm} \times 5.71 = \text{lb/in}$

$\text{N/mm}^2 \times 145 = \text{psi}$

$\text{MPa} \times 145 = \text{psi}$

$\text{N}\cdot\text{m} \times 8.851 = \text{lb}\cdot\text{in}$

$\text{N}\cdot\text{m} \times 0.738 = \text{lb}\cdot\text{ft}$

$\text{N}\cdot\text{mm} \times 0.142 = \text{oz}\cdot\text{in}$

$\text{mPa}\cdot\text{s} = \text{cP}$

**Note**

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

**Trademark usage**

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.

Reference 0.0