FOR-1351 Rev.1.0

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

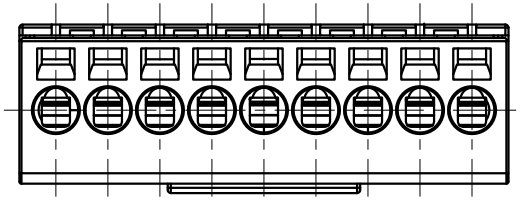

1.Font: Arial
2.Height: 2.0mm
3.Width Scale: 0.6
4.Colour: White

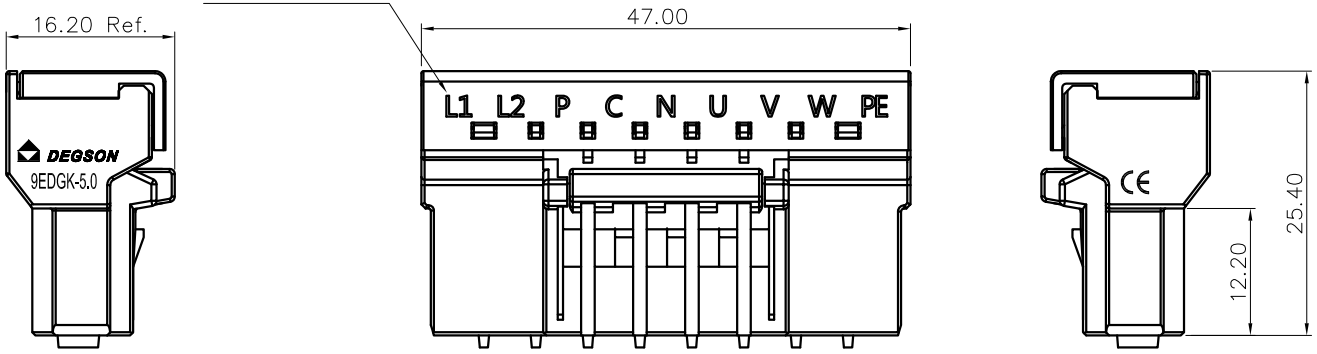

NOTES1:
UL Standard
1.Rated voltage/current : B: 300V / 16A
D: 300V / 10A
2.Withstanding voltage : AC1600V/1Min.
3.Wire range : 28~14AWG
4.Ratings: Use group B 300V AC/DC
Use group D 300V AC/DC

NOTES2:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 5.0mm, Poles : 9P
3.Stripping length : 8~9mm
4.Operating temperature: -40°C~+105°C
5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm					– ⌒ ⌭
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
								∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

9EDGK – 5.0 – 09P – 1Y – 01A (H)
(Series No.) (Pitch) (Poles) (Single Pitch) (Color) 01A (Customer Request) (H) (RoHS)

(Color):
1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

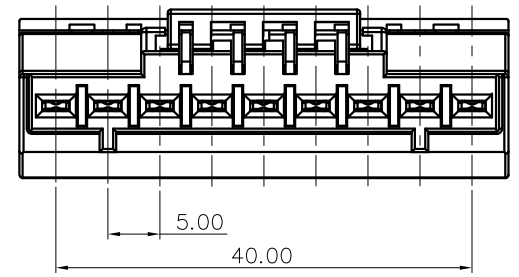

DETACHED LISTS	PART NO.: /	DEGSON® 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD: /	NAME: 9EDGK-5.0-09P-1Y-01A(H)	
	CHKD: /		
	DRFT: /	TITLE: CUSTOMER DRAWING	REV: DO
	THIRD ANGLE PROJECTION	DRAWING NO.: /	SHEET: 1/1
		MM (INCH) DO NOT SCALE DRAWING	SCALE: 1:1