


MECHANICAL TOL. ±0.2 UNLESS SPECIFIED



APPROVAL	COUNTER DRAWING	CUSTOMER REF.	REV.	DATE
COMPANY NAME	STANDARD		00	19-JUL-06
APPROVED BY		SHEET 1 OF 3		
DATE		SCALE 2 : 1		



 PROJECTION

S5971

APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
APPROVED BY			
DATE			
DRAWN BY : TIMMY		UNIT IN mm	OUR REF. 00
✠ CLOVER DISPLAY LIMITED			

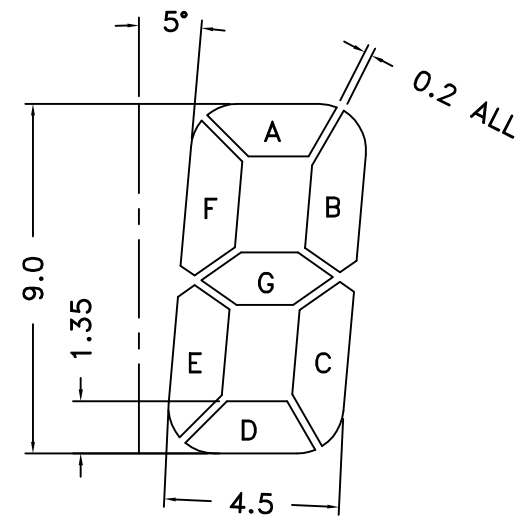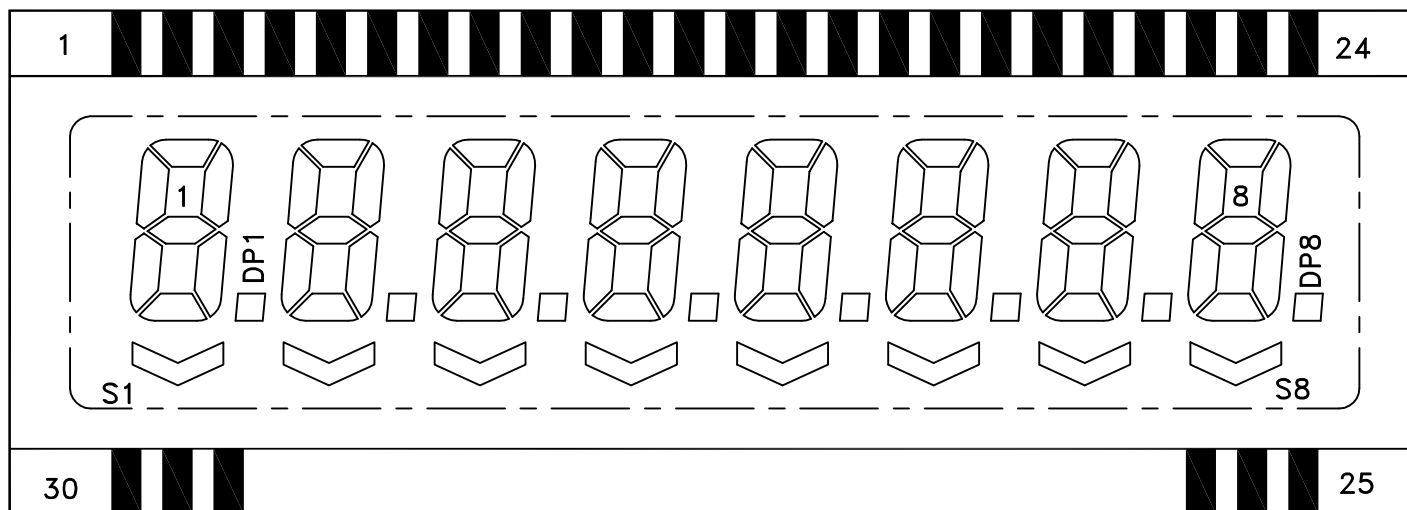

DIGIT 1 ~ 8
SCALE 5 : 1


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
COM1	1F	1A	1B	2F	2A	2B	3F	3A	3B	4F	4A	4B	5F	5A	5B
COM2	1E	1G	1C	2E	2G	2C	3E	3G	3C	4E	4G	4C	5E	5G	5C
COM3	S1	1D	DP1	S2	2D	DP2	S3	3D	DP3	S4	4D	DP4	S5	5D	DP5
PIN	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
COM1	6F	6A	6B	7F	7A	7B	8F	8A	8B	COM1	/	/	/	/	COM1
COM2	6E	6G	6C	7E	7G	7C	8E	8G	8C	/	COM2	/	/	COM2	/
COM3	S6	6D	DP6	S7	7D	DP7	S8	8D	DP8	/	/	COM3	COM3	/	/

TN TYPE


MODEL NO.	S5971A	S5971B	S5971C	S5971D
VIEWING DIRECTION	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK
TEMPERATURE RANGE	OPERATE	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C
	STORAGE	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C
CONNECTOR	ZEBRA TYPE		PIN TYPE	
DISPLAY TYPE	REFLECTIVE / TRANSFLECTIVE / TRANSMISSIVE			
	POSITIVE / NEGATIVE			

OPERATION VOLTAGE	3.0 V
DRIVING METHOD	1/3 DUTY , 1/3 BIAS

REV.	REVISION RECORD	DATE	STANDARD
00	1st ISSUE	19-JUL-06	CUSTOMER REF.
			SHEET 2 OF 3
			SCALE 3 : 1



APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
APPROVED BY			
DATE			
DRAWN BY : TIMMY		UNIT IN mm	OUR REF. 00
CLOVER DISPLAY LIMITED			

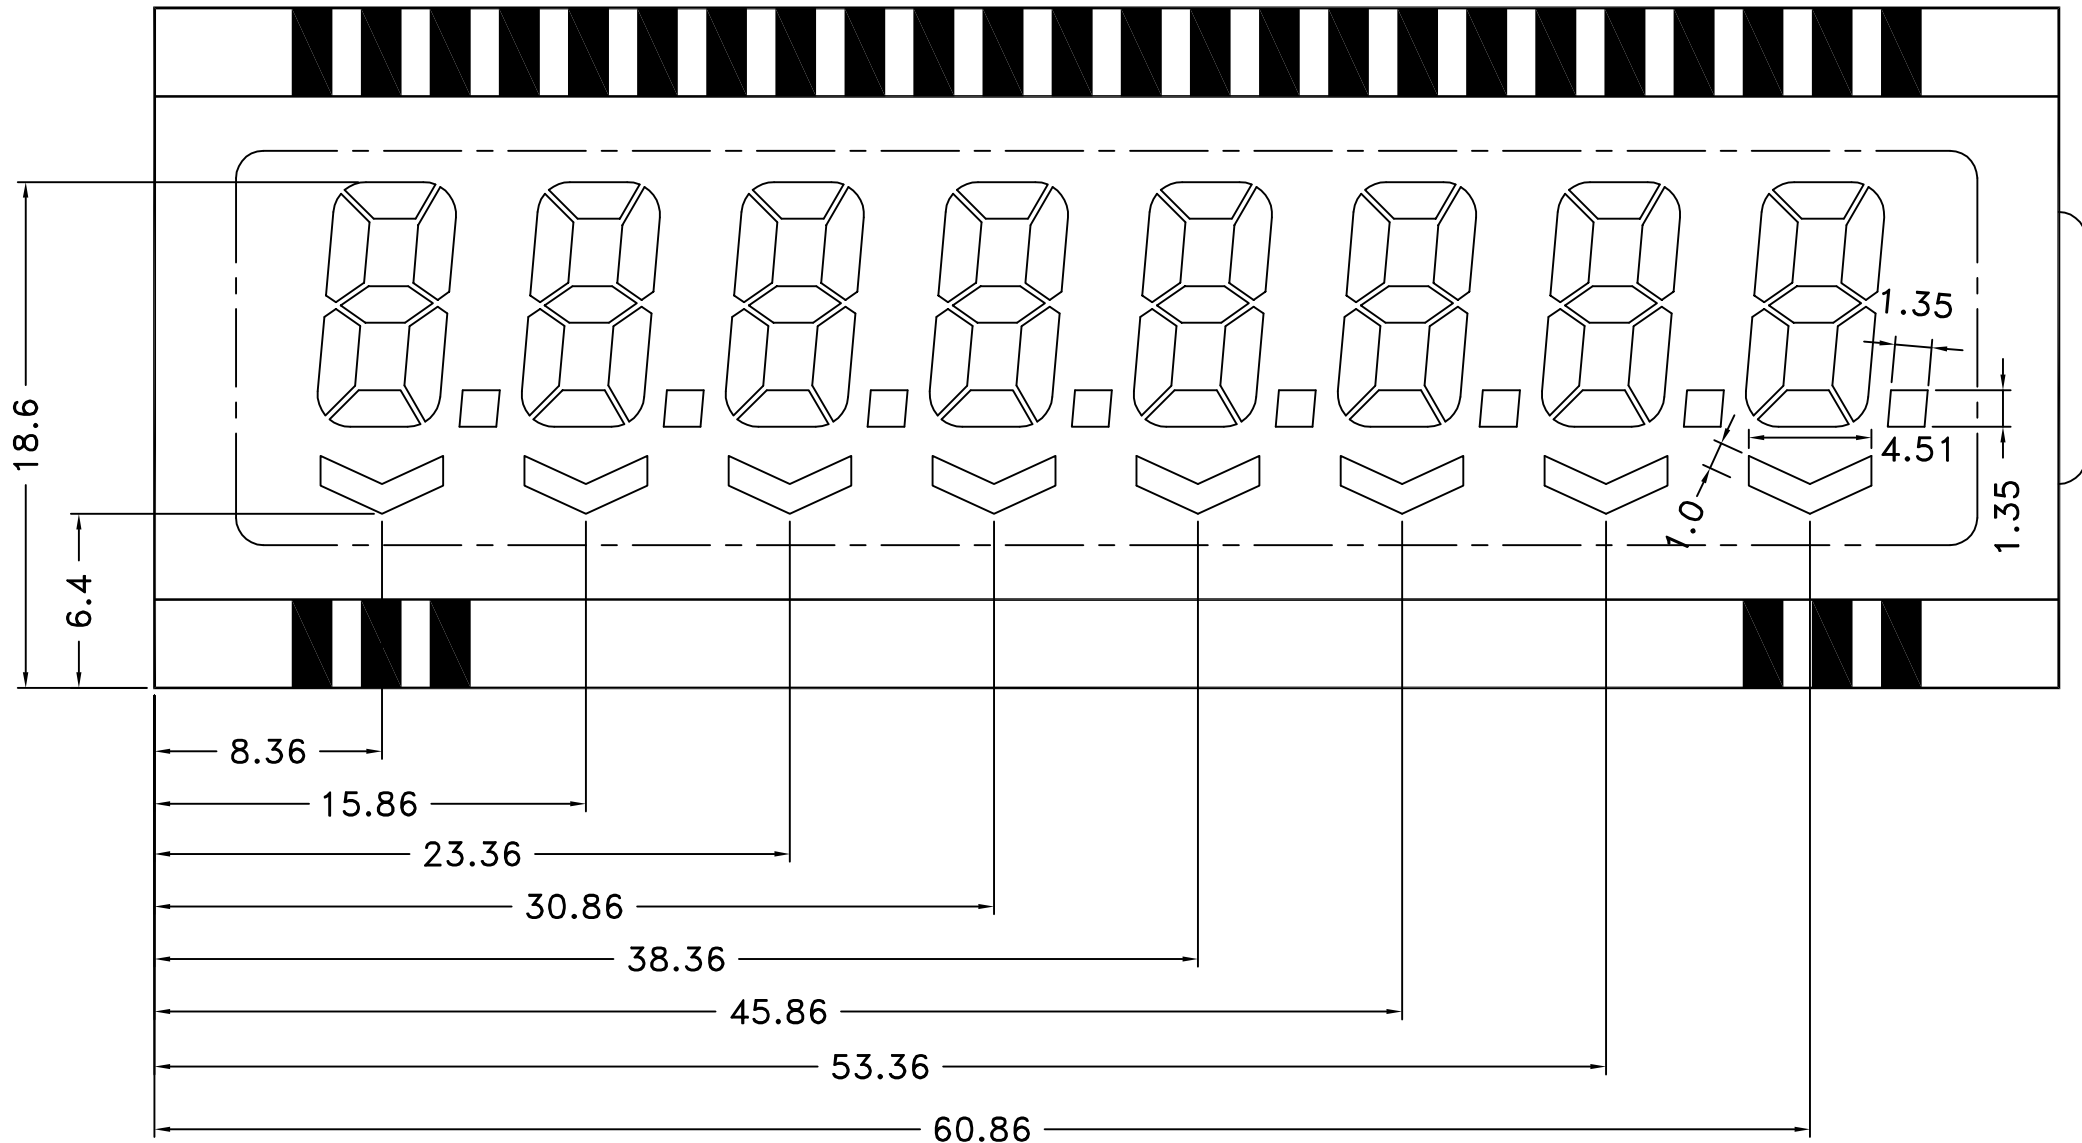

REV.	REVISION RECORD	DATE	STANDARD	 PROJECTION	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
00	1st ISSUE	19-JUL-06	CUSTOMER REF.			APPROVED BY		
					DATE			
			SHEET 3 OF 3		DRAWN BY : TIMMY		UNIT IN mm	OUR REF. 00
			SCALE 7 : 2	S5971	CLOVER DISPLAY LIMITED			