
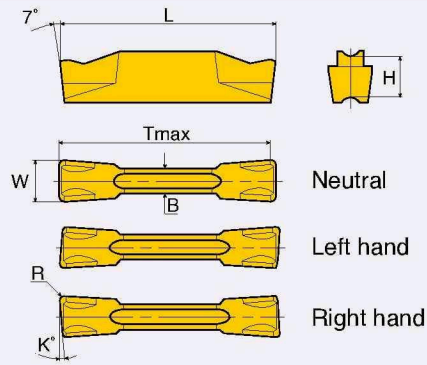



TDC

Double Ended Inserts for Parting and Grooving with "C" Type Chipbreaker



Designation	Insert Seat Size	W±0.05	R	B	L	K	H	Tmax	Grade						
									TT8020	TT7220	TT9030	TT5100	K10	CT3000	PV3030
TDC 2	2	2.0	0.20	1.7	20.0	-	4.7	19	●	●	●		●	●	
TDC 2-6R/L			0.20	1.7	20.0	6	4.7	19	●	●	●				
TDC 2-8R/L			0.20	1.7	20.0	8	4.7	19	●						
TDC 2-15R/L			0.20	1.7	20.0	15	4.7	19	●	●	●				
TDC 2-15RS/LS			0.02	1.7	19.6	15	4.7	19	●	●					
TDC 3	3	3.0	0.20	2.4	20.0	-	4.7	19	●	●	●	●	●		
TDC 3-6R/L			0.20	2.4	20.0	6	4.7	19	●	●	●				
TDC 3-6RS/LS			0.02	2.4	19.6	6	4.7	19		●	●				
TDC 3-15R/L			0.20	2.4	20.0	15	4.7	19	●	●	●				
TDC 4	4	4.0	0.30	3.0	20.0	-	4.7	19	●	●	●		●		
TDC 4-4R/L			0.30	3.0	20.0	4	4.7	19	●	●	●				
TDC 4-15R/L			0.30	3.0	20.0	15	4.7	19	●						
TDC 5	5	5.0	0.30	4.0	25.0	-	5.2	24	●	●	●		●		
TDC 5-4R			0.30	4.0	20.0	4	5.2	24		●	●				
TDC 6	6	6.0	0.30	5.0	25.0	-	5.2	24	●	●	●		●		
TDC 8	8	8.0	0.40	6.0	30.0	-	6.4	29	●		●				