


Tension & Compression Tap Holder

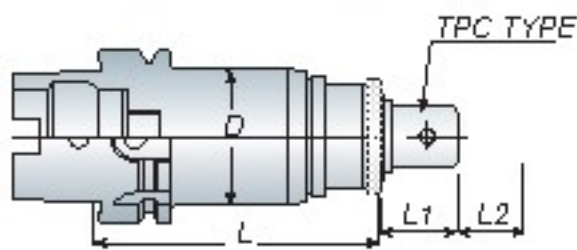

扭力伸縮攻牙本體

Model No.	D	L	L1	L2	Tapping Range	Collet Type	Weight (kg)
HSK63A TPM316	48	135	10	20	M3~M16	TPC316	1.80
TPM83D	66	165	10	25	M8~M30	TPC830	2.80
HSK100A TPM316	48	150	10	20	M3~M16	TPC316	3.50
TPM83D	66	170	10	25	M8~M30	TPC830	4.60

Unit: mm

TPM

HSK-A


series



- L1: Compression, L2: Tension
- Quick change: Push back on the holder sleeve, and the tap collet is removable easily.



P40-TPC Collet

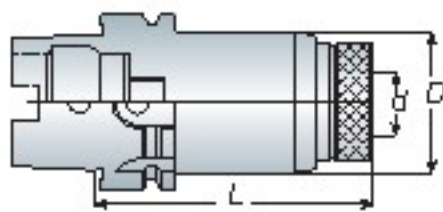

Rigid Tap Holder

剛性攻牙本體

Model No.	d	D	L	Tapping Range	Collet Type	Weight (kg)
HSK63A ART312	19	36	72	M3~M12	ATC312	0.90
ART822	31	53	91	M8~M22	ATC822	1.30


Unit: mm

ART



- ART tap holder is without floating.
- Tap collet is easy and quick to change.
- Torque control type and positive drive type tap collets can be used for ART tap holder.
- ART 剛性攻牙本體不具伸縮功能
- 絲攻筒夾易更換
- 扭力絲攻筒夾及剛性絲攻筒夾皆適用

Tension & Compression Tap Holder

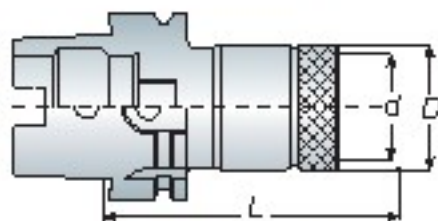

伸縮攻牙本體

Model No.	d	D	L	Tapping Range	Collet Type	Weight (kg)
HSK63A ATP312	19	36	66	M3~M12	ATC312	0.90
ATP822	31	53	93	M8~M22	ATC822	1.60
HSK100A ATP312	19	36	128	M3~M12	ATC312	3.10
ATP822	31	53	155	M8~M22	ATC822	3.80

Unit: mm

ATP



- ATP tap holder is with tension and compression, so it can extend the tap lifetime.
- Torque control type and positive drive type tap collets can be used for ATP tool holder.
- ATP伸縮攻牙本體具有伸縮功能，能延長絲攻使用壽命
- 扭力絲攻筒夾及剛性絲攻筒夾皆適用



P45/46-ATC Collet