

## Morse Taper Holder

莫氏錐度刀桿 - A 型

# MTA

**SK**  
series  
DIN 69871A

Model No.	MT. No.	D	L	Capacity			Weight (kg)
				Drill	Reamer	End Mill	
SK30 MTA 1-050	MTA 1	25	50	2~14	5~14	10~14	0.50
MTA 2-065	MTA 2	32	65	14~23	14.5~23	16~22	0.70
MTA 3-080	MTA 3	40	80	23~32	24~32	24~32	0.80
SK40 MTA 1-050	MTA 1	25	50	2~14	5~14	10~14	1.00
MTA 2-050	MTA 2	32	50	14~23	14.5~23	16~22	1.00
MTA 3-070	MTA 3	40	70	23~32	24~32	24~32	1.10
MTA 4-095	MTA 4	50	95	32~50	32~50	35~50	1.50
SK50 MTA 1-045	MTA 1	25	45	2~14	5~14	10~14	2.80
MTA 2-060	MTA 2	32	60	14~23	14.5~23	16~22	3.00
MTA 3-065	MTA 3	40	65	23~32	24~32	24~32	3.00
MTA 4-095	MTA 4	50	95	32~50	32~50	35~50	3.40
MTA 5-120	MTA 5	65	120	50~75	50	40~75	3.50

Unit: mm



- The tool holder for morse taper shank with internal tang.

## Morse Taper Holder

莫氏錐度刀桿 - B 型

# MTB

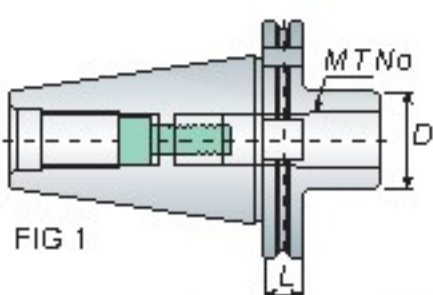


FIG 1

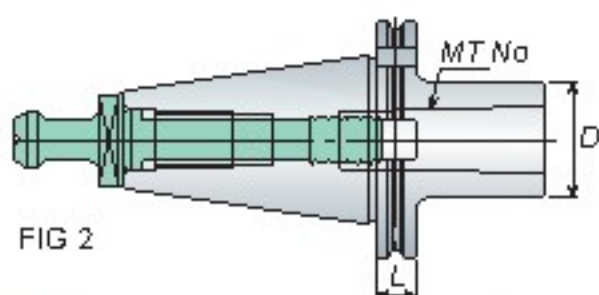


FIG 2

Model No.	FIG.	MT. No.	D	L	Capacity			Weight (kg)
					Drill	Reamer	End Mill	
SK40 MTB 1-050	1	MTB1	25	50	2~14	5~14	10~14	1.00
MTB 2-050	1	MTB2	32	50	14~23	14.5~23	16~22	1.10
MTB 3-070	1	MTB3	40	70	23~32	24~32	24~32	1.20
MTB 4-090	2	MTB4	50	90	32~50	32~50	35~50	1.40
SK50 MTB 1-045	1	MTB1	25	45	2~14	5~14	10~14	2.90
MTB 2-060	1	MTB2	32	60	14~23	14.5~23	16~22	3.00
MTB 3-065	1	MTB3	40	65	23~32	24~32	24~32	3.10
MTB 4-070	1	MTB4	50	70	32~50	32~50	35~50	3.20
MTB 5-105	2	MTB5	65	105	50~75	50	40~75	4.10


Unit: mm



- The tool holder for morse taper shank with internal draw bolt thread.
- MTB-FIG.2 type should be fitted for extension pull stud.
- MTB-FIG.2 刀桿需配合 MTB 長拉頭使用

## Extension Pull Stud

長拉頭

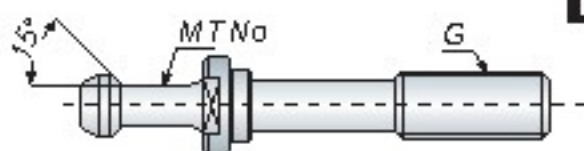

Model No.	MT. No.	G	Weight (kg)
MTB 4-DIN 69872A (M16)	MTB 4	M16x2.0P	0.20
MTB 5-DIN 69872A (M20)	MTB 5	M20x2.5P	0.50

Unit: mm



- The extension pull stud must be ordered separately.
- MTB 長拉頭為另購品