


Tension & Compression Tap Holder

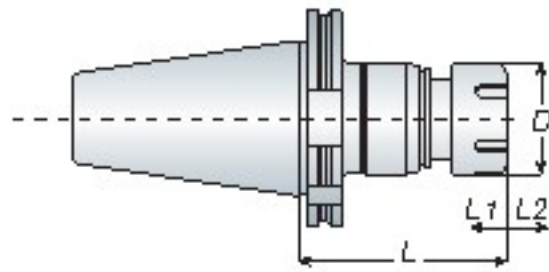

剛性伸縮攻牙本體

Model No.	D	L	L1	L2	Tapping Range	Collet Type	Weight (kg)
SK40 TER16	28	77	5	8	M3~M10	ER16	1.10
TER20	34	86	5	8	M3~M12	ER20	1.20
TER25	42	90	5	8	M4~M16	ER25	1.50
TER32	50	94	5	8	M4~M22	ER32	1.70
TER40	63	98	5	8	M6~M30	ER40	2.90
SK50 TER16	28	80	5	8	M3~M10	ER16	2.80
TER20	34	99	5	8	M3~M12	ER20	2.90
TER25	42	97	5	8	M4~M16	ER25	3.20
TER32	50	95	5	8	M4~M22	ER32	3.40
TER40	63	117	5	8	M6~M30	ER40	4.40


Unit: mm

TER

SK
series
DIN 69871A



- TER tap holder uses the ER spring collet and easy to get.
- The nut could not be over tightening to avoid damaging the body and nut.
- Wrench must be ordered separately.
- TER伸縮攻牙本體須搭配 ER 筒夾做使用
- 使用時，螺帽請勿過度鎖緊以免造成本體及螺帽損壞
- ER 扳手為另購品

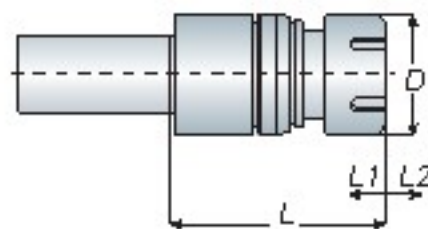

Straight Shank

直柄剛性伸縮攻牙本體

Model No.	D	L	L1	L2	Tapping Range	Collet Type	Weight (kg)
C20 TER16	28	75	5	12	M3~M10	ER16	0.40
TER20	34	80	5	12	M3~M12	ER20	0.50
TER25	42	80	5	12	M4~M16	ER25	0.80
C25 TER16	28	75	5	12	M3~M10	ER16	0.50
TER20	34	80	5	12	M3~M12	ER20	0.60
TER25	42	80	5	12	M4~M16	ER25	0.90
TER32	50	80	5	8	M4~M22	ER32	1.10
C32 TER16	28	75	5	12	M3~M10	ER16	0.70
TER20	34	80	5	12	M3~M12	ER20	0.80
TER25	42	80	5	12	M4~M16	ER25	1.00
TER32	50	80	5	8	M4~M22	ER32	1.30
C40 TER16	28	75	5	12	M3~M10	ER16	1.00
TER20	34	80	5	12	M3~M12	ER20	1.10
TER25	42	80	5	12	M4~M16	ER25	1.30
TER32	50	80	5	8	M4~M22	ER32	1.50

Unit: mm



- TER tap holder uses the ER spring collet and easy to get.
- The nut could not be over tightening to avoid damaging the body and nut.
- Straight shank tap holder also has flat shank type to choice. When ordering, please specify "FLAT".
- Wrench must be ordered separately.
- TER伸縮攻牙本體須搭配 ER 筒夾做使用
- 使用時，螺帽請勿過度鎖緊以免造成本體及螺帽損壞
- 另有直柄削平面可供選購，請於訂購時註明 " 削平面 "
- ER 扳手為另購品



P14- ER Nut

P11/12- ER Collet

P14- Wrench