GHS

Printing date 25.03.2014

Revision: 30.04.2017


· 1.1 Product	tidentifier
	e: HVAC Super Pro
<ul> <li>Article num</li> <li>1.2 Relevant</li> </ul>	
· Application	of the substance / the mixture Coating, Cold metal bonding
<ul> <li>Manufactur Highside Ch 11114 Reich</li> </ul>	nemicals, Inc. hold Road S 39503 USA
ChemTel In	<b>ncy telephone number:</b> c. )24, +1 (813)248-0585
2 Hazards i	dentification
A	on according to Regulation (EC) No 1272/2008
	4 H302 Harmful if swallowed.
Skin Irrit. 2	4 H302 Harmful if swallowed. H315 Causes skin irritation.
Skin Irrit. 2 Eye Irrit. 2	<ul> <li>H302 Harmful if swallowed.</li> <li>H315 Causes skin irritation.</li> <li>H319 Causes serious eye irritation.</li> </ul>
Skin Irrit. 2 Eye Irrit. 2 Skin Sens. 1	<ul> <li>H302 Harmful if swallowed.</li> <li>H315 Causes skin irritation.</li> <li>H319 Causes serious eye irritation.</li> <li>H317 May cause an allergic skin reaction.</li> </ul>
Skin Irrit. 2 Eye Irrit. 2 Skin Sens. 7 STOT SE 3	<ul> <li>4 H302 Harmful if swallowed.</li> <li>H315 Causes skin irritation.</li> <li>H319 Causes serious eye irritation.</li> <li>H317 May cause an allergic skin reaction.</li> <li>H335 May cause respiratory irritation.</li> </ul>
Skin Irrit. 2 Eye Irrit. 2 Skin Sens. 7 STOT SE 3 • Classificati	<ul> <li>H302 Harmful if swallowed.</li> <li>H315 Causes skin irritation.</li> <li>H319 Causes serious eye irritation.</li> <li>H317 May cause an allergic skin reaction.</li> <li>H335 May cause respiratory irritation.</li> <li>on according to Directive 67/548/EEC or Directive 1999/45/EC</li> </ul>
Skin Irrit. 2 Eye Irrit. 2 Skin Sens. 7 STOT SE 3 • Classificati Xi; Irrita	<ul> <li>4 H302 Harmful if swallowed.</li> <li>H315 Causes skin irritation.</li> <li>H319 Causes serious eye irritation.</li> <li>1 H317 May cause an allergic skin reaction.</li> <li>H335 May cause respiratory irritation.</li> <li>on according to Directive 67/548/EEC or Directive 1999/45/EC</li> <li>nt</li> </ul>
Skin Irrit. 2 Eye Irrit. 2 Skin Sens. 7 STOT SE 3 Classificati Xi; Irrita R36/37/38:	<ul> <li>4 H302 Harmful if swallowed.</li> <li>H315 Causes skin irritation.</li> <li>H319 Causes serious eye irritation.</li> <li>H317 May cause an allergic skin reaction.</li> <li>H335 May cause respiratory irritation.</li> <li>on according to Directive 67/548/EEC or Directive 1999/45/EC</li> <li>nt</li> <li>Irritating to eyes, respiratory system and skin.</li> </ul>
Skin Irrit. 2 Eye Irrit. 2 Skin Sens. 7 STOT SE 3 Classificati Xi; Irrita R36/37/38: Xi; Sens	<ul> <li>4 H302 Harmful if swallowed.</li> <li>H315 Causes skin irritation.</li> <li>H319 Causes serious eye irritation.</li> <li>1 H317 May cause an allergic skin reaction.</li> <li>H335 May cause respiratory irritation.</li> <li>on according to Directive 67/548/EEC or Directive 1999/45/EC</li> <li>nt</li> <li>Irritating to eyes, respiratory system and skin.</li> </ul>
Skin Irrit. 2 Eye Irrit. 2 Skin Sens. 7 STOT SE 3 Classificati Xi; Irrita R36/37/38: Xi; Sens R43: Information The product preparations Classificati	<ul> <li>4 H302 Harmful if swallowed.</li> <li>H315 Causes skin irritation.</li> <li>H319 Causes serious eye irritation.</li> <li>1 H317 May cause an allergic skin reaction.</li> <li>H335 May cause respiratory irritation.</li> <li>on according to Directive 67/548/EEC or Directive 1999/45/EC</li> <li>nt</li> <li>Irritating to eyes, respiratory system and skin.</li> <li>sitising</li> <li>May cause sensitisation by skin contact.</li> <li>a concerning particular hazards for human and environment:</li> <li>thas to be labelled due to the calculation procedure of the "General Classification guideline for soft the EU" in the latest valid version.</li> </ul>

GHS

Printing date 25.03.2014

Revision: 30.04.2017

Trade nar	ne: HVAC	Super Pro
-----------	----------	-----------

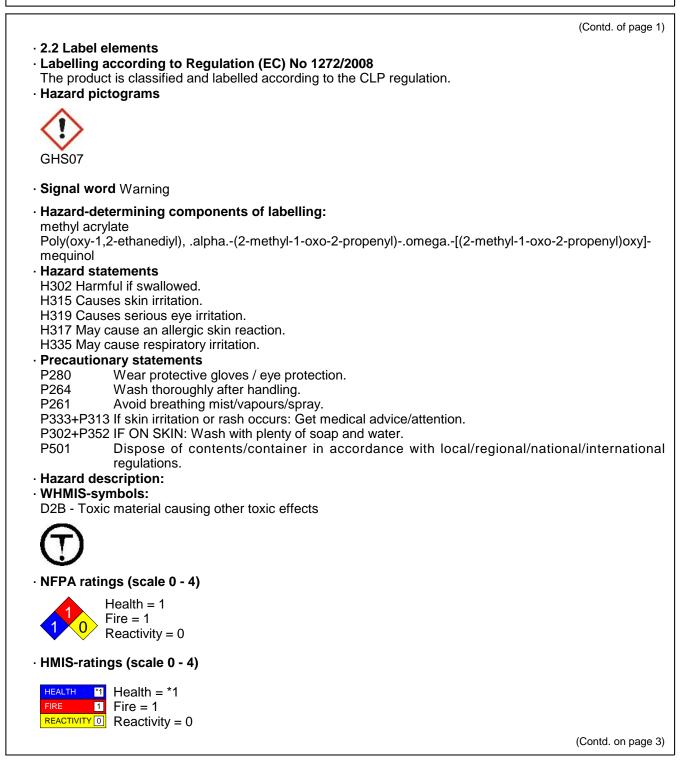

Printing date 25.03.2014

Revision: 30.04.2017

(Contd. of page 2)

**Trade name: HVAC Super Pro** 

#### · HMIS Long Term Health Hazard Substances

None of the ingredients is listed.

### · 2.3 Other hazards

· Results of PBT and vPvB assessment

• **PBT:** Not applicable.

· vPvB: Not applicable.

3 Composition/information on ingredients		
<ul> <li>3.2 Mixtures</li> <li>Description: Mixture of subs</li> </ul>	tances listed below with nonhazardous additions.	
· Dangerous components:		
	Poly(oxy-1,2-ethanediyl), .alpha(2-methyl-1-oxo-2-propenyl)- .omega[(2-methyl-1-oxo-2-propenyl)oxy]- Xi R36/37/38 Skin Irrit. 2, H315; Eye Irrit. 2, H319; STOT SE 3, H335	50-100%
CAS: 96-33-3 EINECS: 202-500-6 Index number: 607-034-00-0	<ul> <li>methyl acrylate</li> <li>Xn R20/21/22; Xi R36/37/38; Xi R43; F R11</li> <li>Flam. Liq. 2, H225</li> <li>Acute Tox. 4, H302; Acute Tox. 4, H312; Acute Tox. 4, H332; Skin Irrit. 2, H315; Eye Irrit. 2, H319; Skin Sens. 1, H317; STOT SE 3, H335</li> </ul>	5-15%
CAS: 80-15-9 EINECS: 201-254-7 Index number: 617-002-00-8	<ul> <li>, -dimethylbenzyl hydroperoxide</li> <li>T R23; Z C R34; X R21/22-48/20/22; O R7; Z N R51/53</li> <li>O Org. Perox. EF, H242</li> <li>Acute Tox. 3, H331</li> <li>STOT RE 2, H373</li> <li>Skin Corr. 1B, H314</li> <li>Aquatic Chronic 2, H411</li> <li>Acute Tox. 4, H302; Acute Tox. 4, H312</li> </ul>	≤ 2,5%
CAS: 150-76-5 EINECS: 205-769-8 Index number: 604-044-00-7	mequinol	≤ 2,5%
	the wording of the listed risk phrases refer to section 16.	

#### **4 First aid measures**

# · 4.1 Description of first aid measures · General information: Immediately remove any clothing soiled by the product. Take affected persons out into the fresh air. · After inhalation: Supply fresh air; consult doctor in case of complaints. (Contd. on page 4)

GHS

Printing date 25.03.2014

Trade name: HVAC Super Pro

Revision: 30.04.2017

<ul> <li>Provide oxygen treatment if affected person has difficulty breathing. In case of irregular breathing or respiratory arrest provide artificial respiration.</li> <li>After skin contact: Immediately wash with water and soap and rinse thoroughly. If skin irritation continues, consult a doctor.</li> <li>After eye contact: Remove contact lenses if worn. Rinse opened eye for several minutes under running water. Then consult a doctor.</li> <li>After swallowing: Rinse out mouth and then drink plenty of water. Do not induce vomiting; call for medical help immediately.</li> <li>4.2 Most important symptoms and effects, both acute and delayed Headache Allergic reactions Irritant to skin and mucous membranes. Irritant to skin and mucous membranes. Irritant to eyes. Breathing difficulty Dizziness Nausea</li> <li>Hazards Danger of impaired breathing.</li> <li>4.3 Indication of any immediate medical attention and special treatment needed Treat skin and mucous membrane with antihistamine and corticoid preparations. If necessary oxygen respiration treatment. In cases of irritation to the lungs, initial treatment with cortical steroid inhalants.</li> </ul>	(Contd. of page 3)
5 Firefighting measures	
· 5.1 Extinguishing media	
Suitable extinguishing agents:	
Carbon dioxide Fire-extinguishing powder	
Fire-extinguishing powder Foam	
Water haze or fog	

- For safety reasons unsuitable extinguishing agents: Water with full jet Water spray
  5.2 Special hazards arising from the substance or mixture Formation of toxic gases is possible during heating or in case of fire.
  5.3 Advice for firefighters
- · Protective equipment:
- Wear self-contained respiratory protective device.
- Wear fully protective suit.
- Additional information Cool endangered receptacles with water fog or haze.

(Contd. on page 5)

Printing date 25.03.2014

Revision: 30.04.2017

#### Trade name: HVAC Super Pro

(Contd. of page 4)

## 6 Accidental release measures

- 6.1 Personal precautions, protective equipment and emergency procedures Use respiratory protective device against the effects of fumes/dust/aerosol.
   Wear protective equipment. Keep unprotected persons away.
   Ensure adequate ventilation
- · 6.2 Environmental precautions: Do not allow to enter sewers/ surface or ground water.
- 6.3 Methods and material for containment and cleaning up: Absorb with liquid-binding material (sand, diatomite, acid binders, universal binders, sawdust). Send for recovery or disposal in suitable receptacles. Dispose contaminated material as waste according to item 13.
- 6.4 Reference to other sections
   See Section 7 for information on safe handling.
   See Section 8 for information on personal protection equipment.
   See Section 13 for disposal information.

# 7 Handling and storage

- **7.1 Precautions for safe handling** Use only in well ventilated areas. Prevent formation of aerosols.
- Information about fire and explosion protection: Keep ignition sources away - Do not smoke. When heated the product forms flammable fumes.
- · 7.2 Conditions for safe storage, including any incompatibilities
- · Storage:
- **Requirements to be met by storerooms and receptacles:** Avoid storage near extreme heat, ignition sources or open flame.
- Information about storage in one common storage facility: Store away from foodstuffs.
- Do not store together with oxidizing and acidic materials.
- Further information about storage conditions: Store in cool, dry conditions in well sealed receptacles.
- · 7.3 Specific end use(s) No further relevant information available.

# 8 Exposure controls/personal protection

• Additional information about design of technical facilities: No further data; see item 7.

#### · 8.1 Control parameters

Ingredients with limit values that require monitoring at the workplace:	
96-33-3 meth	nyl acrylate
IOELV (EU)	Short-term value: 36 mg/m <sup>3</sup> , 10 ppm
	Long-term value: 18 mg/m <sup>3</sup> , 5 ppm
L	(Contd. on page 6)

Revision: 30.04.2017

# Safety Data Sheet according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), and GHS

Printing date 25.03.2014

Trade name: HVAC Super Pro

		(Contd. of page 5)
PEL (USA)	Long-term value: 35 mg/m³, 10 ppm Skin	
REL (USA)	Long-term value: 35 mg/m³, 10 ppm Skin	
TLV (USA)	Long-term value: 7 mg/m³, 2 ppm Skin; (SEN) NIC-DSEN	
EL (Canada)	Long-term value: 2 ppm Skin; S	
EV (Canada)	Long-term value: 2 ppm Skin	
80-15-9 , -0	dimethylbenzyl hydroperoxide	
WEEL (USA)	Long-term value: 6 mg/m³, 1 ppm Skin	
150-76-5 med	uinol	
REL (USA)	Long-term value: 5 mg/m <sup>3</sup>	
TLV (USA)	Long-term value: 5 mg/m <sup>3</sup>	
EL (Canada)	Long-term value: 5 mg/m <sup>3</sup>	
EV (Canada)	Long-term value: 5 mg/m <sup>3</sup>	
<ul> <li>8.2 Exposure</li> <li>Personal prote</li> <li>General prote</li> <li>The usual pre</li> <li>Keep away from</li> <li>Immediately re</li> <li>Wash hands b</li> <li>Do not inhale</li> <li>Avoid contact</li> <li>Clean skin the</li> <li>Not required of</li> <li>Use suitable re</li> </ul>	tective equipment: ective and hygienic measures: cautionary measures are to be adhered to when handling chemicals. om foodstuffs, beverages and feed. emove all soiled and contaminated clothing. before breaks and at the end of work. gases / fumes / aerosols. with the eyes and skin. proughly immediately after handling the product. protection: under normal conditions of use. espiratory protective device in case of insufficient ventilation. espiratory protective device when aerosol or mist is formed. piratory protection may be advisable.	
Prote	ctive gloves	
	terial has to be impermeable and resistant to the product/ the substance/ the the glove material on consideration of the penetration times, rates of d	

(Contd. on page 7)

Printing date 25.03.2014

Revision: 30.04.2017

#### Trade name: HVAC Super Pro

(Contd. of page 6)

• Material of gloves The selection of the suitable gloves does not only depend on the material, but also on further marks of quality and varies from manufacturer to manufacturer. As the product is a preparation of several substances, the resistance of the glove material can not be calculated in advance and has therefore to be checked prior to the application.

#### · Penetration time of glove material

The exact break through time has to be found out by the manufacturer of the protective gloves and has to be observed.

• For the permanent contact gloves made of the following materials are suitable: Butyl rubber, BR

Nitrile rubber, NBR • Eve protection:

# Contact lenses should not be worn.



Safety glasses

- **Body protection:** Protective work clothing
- Limitation and supervision of exposure into the environment No further relevant information available.
- **Risk management measures** See Section 7 for additional information. No further relevant information available.

#### 9 Physical and chemical properties

- · 9.1 Information on basic physical and chemical properties
- · General Information

· Appearance:		
Form:	Liquid	
Colour:	Violet	
· Odour:	Sweetish	
· Odour threshold:	Not determined.	
· pH-value:	Not determined.	
<ul> <li>Change in condition Melting point/Melting range: Boiling point/Boiling range:</li> </ul>	Not Determined. Undetermined.	
· Flash point:	>392 °F / >200 °C	
· Flammability (solid, gaseous):	Not applicable.	
· Auto/Self-ignition temperature:	Not determined.	
· Decomposition temperature:	Not determined.	
· Self-igniting:	Product is not self-igniting.	
· Danger of explosion:	Product does not present an explosion hazard.	(Contd. on page 8)
		,

Printing date 25.03.2014

Revision: 30.04.2017

Trade name: HVAC Super Pro (Contd. of page 7) · Explosion limits: Lower: 2,4 Vol % Upper: 18,6 Vol % · Vapour pressure at 20 °C: 89 hPa · Density at 20 °C: 1,05-1,10 g/cm3 · Relative density Not determined. · Vapour density Not determined. · Evaporation rate Not determined. · Solubility in / Miscibility with water: Not miscible or difficult to mix. · Partition coefficient (n-octanol/water): Not determined. · Viscosity: **Dynamic:** Not determined. **Kinematic:** Not determined. 9.2 Other information No further relevant information available. 10 Stability and reactivity · 10.1 Reactivity · 10.2 Chemical stability · Thermal decomposition / conditions to be avoided: No decomposition if used and stored according to specifications. 10.3 Possibility of hazardous reactions Reacts with catalysts, oxidizing agents and strong alkali. Toxic fumes may be released if heated above the decomposition point. Reacts with certain metals. · 10.4 Conditions to avoid Store away from oxidizing agents.

Keep away from heat and direct sunlight.

- **10.5 Incompatible materials:** No further relevant information available.
- **10.6 Hazardous decomposition products:** Carbon monoxide and carbon dioxide Ammonia Nitrogen oxides (NOx)

Sulphur oxides (SOx) Hydrocarbons

(Contd. on page 9)

Printing date 25.03.2014

Revision: 30.04.2017

Trade name: HVAC Super Pro

(Contd. of page 8)

# 11 Toxicological information

## · 11.1 Information on toxicological effects

#### · Acute toxicity:

#### · LD/LC50 values relevant for classification:

#### 96-33-3 methyl acrylate

Oral LD50 277 mg/kg (rat)

Dermal LD50 1243 mg/kg (rabbit)

#### 80-15-9 , -dimethylbenzyl hydroperoxide

OralLD50382 mg/kg (rat)DermalLD50500 mg/kg (rat)InhalativeLC50/4h220 mg/l (rat)

#### · Primary irritant effect:

• on the skin: Irritant to skin and mucous membranes.

• on the eye: Irritating effect.

• Sensitization: Sensitization possible through skin contact.

· Additional toxicological information:

The product shows the following dangers according to the calculation method of the General EU Classification Guidelines for Preparations as issued in the latest version: Irritant

Danger through skin adsorption.

Toxic and/or corrosive effects may be delayed up to 24 hours.

- Acute effects (acute toxicity, irritation and corrosivity): Danger through skin adsorption.
- Sensitisation: Sensitization possible by skin contact.
- · Repeated dose toxicity: Repeated exposures may result in skin and/or respiratory sensitivity.

# **12 Ecological information**

- · 12.1 Toxicity
- · Aquatic toxicity: The product contains materials that are harmful to the environment.
- 12.2 Persistence and degradability No further relevant information available.
- · 12.3 Bioaccumulative potential

Due to the distribution coefficient n-octanol/water a worth-mentioning accumulation in organisms is not expected.

- · 12.4 Mobility in soil No further relevant information available.
- · Ecotoxical effects:
- · Remark:

Due to mechanical actions of the product (e.g. agglutinations) damages may occur.

The product is oxygen-consuming. The declared action may be partly caused by lack of oxygen.

- · Additional ecological information:
- · General notes:

Do not allow product to reach ground water, water course or sewage system.

Danger to drinking water if even small quantities leak into the ground.

Avoid transfer into the environment.

This statement was deduced from the properties of the single components.

(Contd. on page 10)

GHS

Printing date 25.03.2014

Revision: 30.04.2017

(Contd. of page 9)

#### Trade name: HVAC Super Pro

#### · 12.5 Results of PBT and vPvB assessment

• **PBT:** Not applicable.

- **vPvB:** Not applicable.
- · 12.6 Other adverse effects No further relevant information available.

#### 13 Disposal considerations

#### · 13.1 Waste treatment methods

#### · Recommendation

Must not be disposed together with household garbage. Do not allow product to reach sewage system. Can be disposed of with household garbage after solidification following consultation with the waste disposal facility operator and the pertinent authorities and adhering to the necessary technical regulations. Can be burned with household garbage after consulting with the waste disposal facility operator and the pertinent authorities and adhering to the necessary technical regulations.

#### · Uncleaned packaging:

· Recommendation: Disposal must be made according to official regulations.

14 Transport information	
· 14.1 UN-Number	
· DOT, ADR, ADN, IMDG, IATA	Not Regulated
· 14.2 UN proper shipping name	
· DOT, ADR, ADN, IMDG, IATA	Not Regulated
<ul> <li>14.3 Transport hazard class(es)</li> </ul>	
· DOT, ADR, ADN, IMDG, IATA	
· Class	Not Regulated
· 14.4 Packing group	0
· DOT, ADR, IMDG, IATA	Not Regulated
<ul> <li>14.5 Environmental hazards:</li> </ul>	
<ul> <li>Marine pollutant:</li> </ul>	No
<ul> <li>14.6 Special precautions for user</li> </ul>	Not applicable.
<ul> <li>14.7 Transport in bulk according to Annex</li> </ul>	ll of
MARPOL73/78 and the IBC Code	Not applicable.
• UN "Model Regulation":	-

#### **15 Regulatory information**

 $\cdot$  15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture  $\cdot$  United States (USA)

· SARA

## · Section 355 (extremely hazardous substances):

None of the ingredients is listed.

(Contd. on page 11)

Printing date 25.03.2014

Revision: 30.04.2017

Trade name: HVAC Super Pro

	(Contd. of page 10
· Section 313 (Specific toxic chemical listings):	
96-33-3 methyl acrylate	
80-15-9 , -dimethylbenzyl hydroperoxide	
· TSCA (Toxic Substances Control Act):	
All ingredients are listed.	
· Proposition 65 (California):	
· Chemicals known to cause cancer:	
None of the ingredients is listed.	
· Chemicals known to cause reproductive toxicity for females:	
None of the ingredients is listed.	
· Chemicals known to cause reproductive toxicity for males:	
None of the ingredients is listed.	
· Chemicals known to cause developmental toxicity:	
None of the ingredients is listed.	
· Carcinogenic Categories	
· EPA (Environmental Protection Agency)	
96-33-3 methyl acrylate	D
· IARC (International Agency for Research on Cancer)	
96-33-3 methyl acrylate	3
TLV (Threshold Limit Value established by ACGIH)	
96-33-3 methyl acrylate	A4
NIOSH-Ca (National Institute for Occupational Safety and Health)	
None of the ingredients is listed.	
· OSHA-Ca (Occupational Safety & Health Administration)	
None of the ingredients is listed.	
· Canada	
· Canadian Domestic Substances List (DSL)	
All ingredients are listed.	
· Canadian Ingredient Disclosure list (limit 0.1%)	
None of the ingredients is listed.	
· Canadian Ingredient Disclosure list (limit 1%)	
96-33-3 methyl acrylate	
80-15-9 , -dimethylbenzyl hydroperoxide	
150-76-5 mequinol	
• Other regulations, limitations and prohibitive regulations	
Substances of very high concern (SVHC) according to REACH, Article 57	
None of the ingredients is listed.	
	(Contd. on page 1

Printing date 25.03.2014

Revision: 30.04.2017

# Trade name: HVAC Super Pro

#### (Contd. of page 11) • 15.2 Chemical safety assessment: A Chemical Safety Assessment has not been carried out.

	nformation
	mation is based on our present knowledge. However, this shall not constitute a guarantee for ar roduct features and shall not establish a legally valid contractual relationship.
Relevant	phrases
H225	Highly flammable liquid and vapour.
H242	Heating may cause a fire.
H302	Harmful if swallowed.
H312	Harmful in contact with skin.
H314	Causes severe skin burns and eye damage.
H315	Causes skin irritation.
H317	May cause an allergic skin reaction.
H319	Causes serious eye irritation.
H331	Toxic if inhaled.
H332	Harmful if inhaled.
H335	May cause respiratory irritation.
H373	May cause damage to organs through prolonged or repeated exposure.
H411	Toxic to aquatic life with long lasting effects.
R11	Highly flammable.
	2 Harmful by inhalation, in contact with skin and if swallowed.
R21/22	Harmful in contact with skin and if swallowed.
R21/22	Harmful if swallowed.
R23	Toxic by inhalation.
R34	Causes burns.
R36	Irritating to eyes.
	8 Irritating to eyes, respiratory system and skin.
R43	May cause sensitisation by skin contact.
	2 Harmful: danger of serious damage to health by prolonged exposure through inhalation and
	swallowed.
R51/53	Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.
R7	May cause fire.
	itions and acronyms:
	ord européen sur le transport des marchandises dangereuses par Route (European Agreement concerning th al Carriage of Dangerous Goods by Road)
	national Maritime Code for Dangerous Goods
DOT: US D	epartment of Transportation
	national Air Transport Association
	ally Harmonized System of Classification and Labelling of Chemicals erican Conference of Governmental Industrial Hygienists
EINECS: E	uropean Inventory of Existing Commercial Chemical Substances
ELINCS: E	uropean List of Notified Chemical Substances
	nical Abstracts Service (division of the American Chemical Society) onal Fire Protection Association (USA)
	ardous Materials Identification System (USA)
	orkplace Hazardous Materials Information System (Canada)
	ved No-Effect Level (REACH)
	dicted No-Effect Concentration (REACH) al concentration, 50 percent

Printing date 25.03.2014

Trade name: HVAC Super Pro

Revision: 30.04.2017

(Control LD50: Lethal dose, 50 percent Flam. Liq. 2: Flammable liquids, Hazard Category 2 Org. Perox. EF: Organic Peroxides, Types E, F Acute Tox. 4: Acute toxicity, Hazard Category 4 Acute Tox. 3: Acute toxicity, Hazard Category 3 Skin Corr. 1B: Skin corrosion/irritation, Hazard Category 1B Skin Irrit. 2: Skin corrosion/irritation, Hazard Category 2 Eye Irrit. 2: Serious eye damage/eye irritation, Hazard Category 2 Skin Sens. 1: Sensitisation - Skin, Hazard Category 1 STOT SE 3: Specific target organ toxicity - Single exposure, Hazard Category 3 STOT RE 2: Specific target organ toxicity - Repeated exposure, Hazard Category 2 Aquatic Chronic 2: Hazardous to the aquatic environment - Chronic Hazard, Category 2 SDS Prepared by: ChemTel Inc. 1305 North Florida Avenue Tampa, Florida USA 33602-2902 Toll Free North America 1-888-255-3924 Intl. +01 813-248-0573 Website: www.chemtellinc.com	td. of page 12)
--	-----------------