

DS-AT1000S/336 Series Storage System

Introduction

DS-AT1000S/336 series storage system is a storage product with huge capacity and high-density design. A 4U chassis provides up to 336 TB capacity. Compared to general storage product, DS-AT1000S reduces the total cost at up to 40%. VRAID 2.0 technology realizes an intensive management for storage space and data, and protects the data security from substructure.

Hierarchical storage technology improves data search performance by at least 10 times. Periodic HDD replacement guarantees the product availability.



Key Feature

Huge Capacity and High Density

- A 4U chassis provides up to 336 TB capacity
- High-density design reduces the installation space requirement and transportation cost

Low consumption

For 14 TB enterprise HDD, lower consumption for each terabyte at 70%

Security and Reliability

- VRAID 2.0 technology and N + M redundant mechanism allow up to 2 error HDDs in a single RAID
- HDD encryption technology protects data security by only allowing Hikvision device to read the data in HDD

Maintenance-Free

- Rebuild fault HDD on-demand
- HDD periodic automatic replacement

Stream Data Management Structure of High Performance

Based on the bottom layer management structure of the stream media, it solves the problem that the damaged file system will lead to file unreadability or loss and ensures no file fragments will be produced during overwriting

Direct Storage of Mixed Stream

- Supports mixed storage of video stream and SMART stream
- Supports camera access through protocols including RTSP, ONVIF, PSIA, etc.

VRAID 2.0

Erasur encoding and VRAID 2.0 technologies ensure data integrity even when 2 HDDs in a single RAID are error. If the number of error HDD exceeds redundant limit, other HDDs can still be read and written

Abundant Application

- Continuous recording, manual recording, and alarm recording
- Provides Automatic Network Replenishment (ANR) feature to ensure data integrity when network is abnormal
- Supports data backup to ensure data security

User-Friendly Operation and Maintenance


- Supports one-key configuration to improve system configuration efficiency
- Raises device maintenance efficiency via abundant alarm management methods, like alarm via indicators, mobile phone messages, and emails.



Specification

Model		DS-AT1000S/336
Performance	Video (2 Mbps stream + rebuilding)	400-ch
Controller	Processor	64-bit multi-core processor
	Cache	16 GB, extendable to 32 GB
Storage	HDD slot	24
	Interface	SATA
	Capacity	Up to 14 TB
	RAID	iRAID
	Disk	Disk detection pre-alarm and repair
	Logical volume	Recording volume management
Recording	Recording type	Continuous recording, manual recording, and alarm recording
	Video backup	Local backup and video uploading
	Video protection	Video lock, video loss alarm
	Search and download	Log in storage system to search, play, and download videos. Support searching videos by time, event type, and smart information
Maintenance and Management	Management method	GUI based on web, serial port CLI, platform
	Alarm method	Audio, indicator, GUI
Network	Protocol	RTSP, ONVIF, HKSDK
External interface	Data network interface	4, 1000 Mbps Ethernet interface
	Management network interface	1, 1000 Mbps Ethernet interface
	SAS interface	1
	COM interface	1, RS-232
	USB interface	2 × USB 3.0, 2 × USB 2.0
	VGA interface	Supported (VGA and RS-232 interface cannot be used at the same time)
	IPMI interface	Supported
General	Power supply	100 to 240 VAC/47 to 63Hz, redundant power supply
	Power consumption (with HDDs)	≤ 369.8 W
	Environment temperature	<ul style="list-style-type: none"> Working: 5 °C to 40 °C (41 °F to 104 °F) Storing: -20 °C to +70 °C (-4 °F to +158 °F)
	Environment humidity	<ul style="list-style-type: none"> Working: 20% to 80% RH (non-condensing/frozen) Storing: 5% to 90% RH (non-condensing/frozen)
	Dimensions (W × D × H)	445 × 175 × 746 mm (17.5 × 6.9 × 29.4 inch)
	Weight (without HDDs)	≤ 40 kg (88.2 lb)

Physical Interface

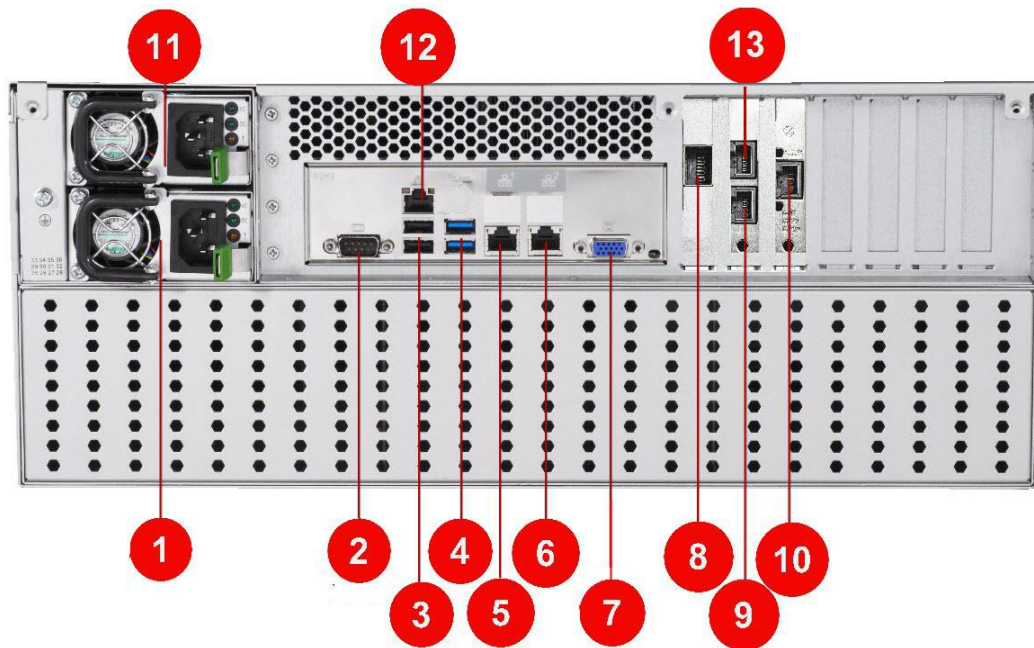

No.	Name	No.	Name
1	Power module 1	8	SAS interface
2	COM interface	9	Data network interface 3
3	Two USB interfaces	10	Management network interface
4	Two USB interfaces	11	Power module 2
5	Data network interface 1	12	IPMI
6	Data network interface 2	13	Data network interface 4
7	VGA interface		

Available Model

DS-AT1000S/336

Distributed by




Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com