



# Efficient fluorescent lighting with improved color rendering

## TL-D LIFEMAX Super 80

The TL-D LIFEMAX Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

### Benefits

- Good color rendering
- Relatively high efficacy, both initially and during lamp lifetime, with high lumen maintenance
- Create atmospheres from warm white to cool daylight

### Features


- Highly efficient 3-band fluorescent coating
- High initial light output compared with standard colors
- Low mercury dose
- Can be used with conventional or electronic gear
- Higher efficacy is achieved with electronic gear

### Application

- Suitable for use in a wide range of luminaires for TL-D fluorescent lamps for 'human' applications such as schools, offices, shops, factory halls etc.

# TL-D LIFEMAX Super 80

## Dimensional drawing

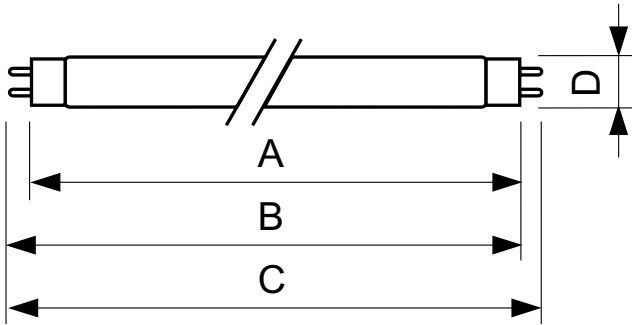

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 36W/840 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
TL-D 36W/830 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
TL-D 18W/830 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
TL-D 18W/865 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
TL-D 36W/865 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
TL-D 18W/827 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
TL-D 18W/840 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
TL-D 36W/827 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

### Approval and application

Mercury (Hg) Content (Nom)	2.0 mg
----------------------------	--------

### Controls and dimming

Dimmable	Yes
----------	-----

### General information

Cap-Base	G13
Life To 50% Failures Preheat (Nom)	20000 h
Life To 10% Failures (Nom)	10000 h

### Light technical

Lumen Maintenance 2000 h (Nom)	96 %
Lumen Maintenance 5000 h (Nom)	94 %

### Mechanical and housing

Bulb Shape	T8
------------	----

### Operating and electrical

Order Code	Full Product Name	Lamp Current (Nom)	Voltage (Nom)	Power (Nom)
927980282736	TL-D 18W/827 1SL/25	0.360 A	59 V	18 W
927980283036	TL-D 18W/830 1SL/25	0.360 A	59 V	18 W
927980284036	TL-D 18W/840 1SL/25	0.360 A	59 V	18 W
927980286536	TL-D 18W/865 1SL/25	0.360 A	59 V	18 W
927982282736	TL-D 36W/827 1SL/25	0.440 A	103 V	36 W
927982283036	TL-D 36W/830 1SL/25	0.440 A	103 V	36 W
927982284036	TL-D 36W/840 1SL/25	0.440 A	103 V	36 W
927982286536	TL-D 36W/865 1SL/25	0.440 A	103 V	36 W

## General information

Order Code	Full Product Name	Life To 50% Failures (Nom)
927980282736	TL-D 18W/827 1SL/25	13000 h
927980283036	TL-D 18W/830 1SL/25	13000 h
927980284036	TL-D 18W/840 1SL/25	13000 h
927980286536	TL-D 18W/865 1SL/25	13000 h

Order Code	Full Product Name	Life To 50% Failures (Nom)
927982282736	TL-D 36W/827 1SL/25	15000 h
927982283036	TL-D 36W/830 1SL/25	15000 h
927982284036	TL-D 36W/840 1SL/25	15000 h
927982286536	TL-D 36W/865 1SL/25	15000 h

## Light technical (1/2)

Order Code	Full Product Name	Colour Code	Colour Designation	Correlated	Colour
				Temperature (Nom)	Rendering Index (Nom)
927980282736	TL-D	827	Incandescent	2700 K	82
	18W/827				
	1SL/25				
927980283036	TL-D	830	Warm white (WW)	3000 K	83
	18W/830				
	1SL/25				

Order Code	Full Product Name	Colour Code	Colour Designation	Correlated	Colour
				Temperature (Nom)	Rendering Index (Nom)
927980284036	TL-D	840	Cool White (CW)	4000 K	82
	18W/840				
	1SL/25				
927980286536	TL-D	865	Cool Daylight	6500 K	80
	18W/865				
	1SL/25				

## TL-D LIFEMAX Super 80

Order Code	Full Product Name	Colour Code	Colour Designation	Correlated Colour Temperature (Nom)	Colour Rendering Index (Nom)
927982282736	TL-D 36W/827 1SL/25	827	Incandescent White	2700 K	82
927982283036	TL-D 36W/830 1SL/25	830	Warm white (WW)	3000 K	83

Order Code	Full Product Name	Colour Code	Colour Designation	Correlated Colour Temperature (Nom)	Colour Rendering Index (Nom)
927982284036	TL-D 36W/840 1SL/25	840	Cool White (CW)	4000 K	82
927982286536	TL-D 36W/865 1SL/25	865	Cool Daylight	6500 K	80

### Light technical (2/2)

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux (Rated) (Nom)
927980282736	TL-D 18W/827 1SL/25	75 lm/W	1350 lm
927980283036	TL-D 18W/830 1SL/25	75 lm/W	1350 lm
927980284036	TL-D 18W/840 1SL/25	75 lm/W	1350 lm
927980286536	TL-D 18W/865 1SL/25	71 lm/W	1275 lm

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux (Rated) (Nom)
927982282736	TL-D 36W/827 1SL/25	90 lm/W	3250 lm
927982283036	TL-D 36W/830 1SL/25	90 lm/W	3250 lm
927982284036	TL-D 36W/840 1SL/25	90 lm/W	3250 lm
927982286536	TL-D 36W/865 1SL/25	85 lm/W	3070 lm

