


Product datasheet

Specifications

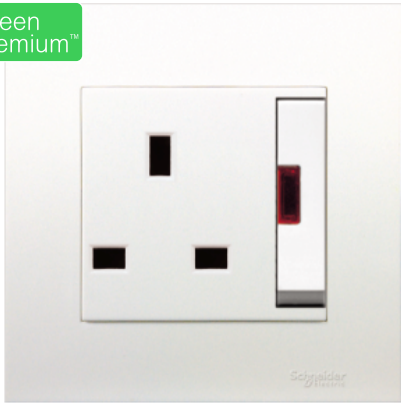

13A 250V 1 Gang Double Pole Large Dolly Switched Socket with Neon

KB15LDN

❗ Discontinued on: 01 July 2019

❗ Discontinued

Main

Range	Vivace
Product or component type	Switched socket
Device short name	KB15
Device presentation	Complete product

Complementary

Pilot light	Red neon indicator
Outlet poles configuration	2P + E
Number of gangs	1 gang
Colour tint	White
Material	Polycarbonate: grid plate Polycarbonate: surround Polycarbonate: base
Projecting depth	8 mm
Device mounting	Flush
Mounting support	Wall mounted
Fixing mode	By screw M3.5
Fixing center	60.3 mm
Embedding depth	35 mm
Rated current	13 A at 250 V AC, no inductive load
Network frequency	50 Hz
Contacts material	Brass and phosphor bronze
Connections - terminals	Pillar terminal
Terminal identifier	N L Earth
Tightening torque	0.4 N.m
Clamping connection capacity	2 x 4 mm ² 3 x 2.5 mm ²
Width	86 mm
Height	86 mm

Environment

Standards	SS 145 BS 1362-2 MS 589
-----------	-------------------------------

Ambient air temperature for operation	-5...40 °C
---------------------------------------	------------

Relative humidity	0...95 %
-------------------	----------

Environmental characteristic	Indoor use
------------------------------	------------

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Number of Units in Package 1	1
------------------------------	---

Package 1 Weight	114.01 g
------------------	----------

Offer Sustainability

Sustainable offer status	Green Premium product
--------------------------	-----------------------

REACH Regulation	REACH Declaration
------------------	-----------------------------------

REACH free of SVHC	Yes
--------------------	-----

EU RoHS Directive	Compliant EU RoHS Declaration
-------------------	--

Toxic heavy metal free	Yes
------------------------	-----

Mercury free	Yes
--------------	-----

China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
-----------------------	---

RoHS exemption information	Yes
----------------------------	-----

Environmental Disclosure	Product Environmental Profile
--------------------------	---

Contractual warranty

Warranty	18 months
----------	-----------

Recommended replacement(s)