


# NIKKON®

## DRACO UF1 HIGHBAY



PC Reflector

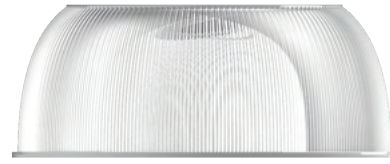

PC Visor

### LUMINAIRE SPECIFICATIONS

- Power 100W  
150W  
200W
- Fitting Material Non-Corrosive Die-Cast Aluminium
- Fitting Color Black
- Optical Cover 95% Transparency Clear Tempered Glass
- Ingress Protection IP65
- Voltage 220 ~ 240 Vac 50 / 60Hz
- Electrical Safety Class Class I
- Operating Temperature -30 ~ +45°C
- Installation Hook Mounting
- Pre-Wire 300 mm

### OPTIONAL FEATURES (UPON REQUEST)

- Reflector Polycarbonate
- Visor Polycarbonate
- Beam Angle 60D, 90D, 120D

### LED MODULE SPECIFICATIONS

- Color Temperature 5700K Daylight
- Color Rendering Index (CRI) >70
- L70 100,000 Hrs @ 25°C

### COMPLIANCE STANDARD

- LED LM80, UL, RoHS
- Driver CE, EN61347, EN55015, EN61000, EN61547, EN62384, UL

### APPLICATION

- Eateries, Retails, Hallways, Storage Rooms & Halls

### MEASUREMENT & ORDER CODE



WATTAGE	ORDER CODE	TYPICAL LUMINOUS FLUX	TYPICAL WATTAGE	CARTON DIMENSION (L x W x H) mm	NETT WEIGHT
100W	UF1 100W	12000	100	330 x 330 x 205	3.8 kg
150W	UF1 150W	18000	150	390 x 390 x 205	4.1 kg
200W	UF1 200W	24000	200	445 x 445 x 215	4.2 kg

\* Please indicate beam angle when ordering.  
\* All result tested base on 5700K CCT LEDs.





### DIMENSION



UF1 100W




UF1 150W




UF1 200W



PC Reflector




PC Visor




### PHOTOMETRIC

60D




cd/m<sup>2</sup>  
C0/C180: C90/C270:

90D



cd/m<sup>2</sup>  
C0/C180: C90/C270:

120D



cd/m<sup>2</sup>  
C0/C180: C90/C270:

Note: All specifications are subject to change without prior notice for product improvement. Images, pictures, and illustrations used are for illustrative purposes only and the color printed may differ from the actual product.