

# minimalist

Product Code	Description
EB8318S	13A 1 Gang Universal Switched Socket Outlet



EB8318S-SBL

### **Technical Specification**

- Rated Voltage: 250V 50/60Hz
- Rated Current: 13A
- Recommended wire size:
  2.5mm<sup>2</sup> 4.0mm<sup>2</sup>
- Dimensions:
  86 x 86 x 10mm (WxHxD)
- Fix Center: 60.3mm
- Fix Screw: M3.5 x 0.6 x 23.5mm±



Product back view


- Mounting box: >35mm depth
  - R1150, flush mounting, plastic
    (80 x 80 x 48.4mm) (WxHxD)
  - M1247, flush mounting, metal (79 x 73 x 47mm) (WxHxD)
- Comply to standards: GB 16915.1 GB/T 2099.1



## minimalist

### **Installation Method:**

R1150

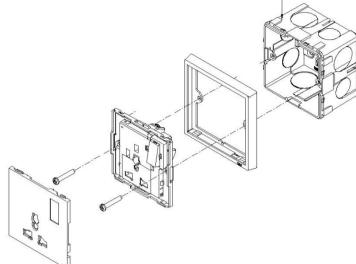

### Applicable on selected type of plugs:

Plug	Description
2-pin Plug (Non-earth)	2.5A, 250V
2-pin Plug (Euro)	2.5A, 250V
2-pin Plug Round	10/16A, 250V
2-pin Plug (Non-earth)	10/16A, 250V
3-pin Plug (BS)	13A, 250V
3-pin Plug Round (BS)	5A, 250V
2-pin Australia Plug	7.5A, 250V
3-pin Australia Plug	10A, 250V
3-pin Australia Plug	15A, 250V
3-pin China Plug	6/10A., 250V
2-pin China Plug	6/10A., 250V

Product Code		Colour	
EB8318S		White	
EB8318S-SBL		Matt Black (SBL)	
EB8318S-MSB		Matt Silver Black (MSB)	
EB8318S-MSL		Matt Silver (MSL)	
*For other colours, please contact T&J Sales representative			

Product specifications are subject to change without notice to improve reliability, function or design.