T&J

HARMONY

Product Code	Description
EA4204QP-A12B	3.3V - 24V DC 4 Gang Soft Touch Switch with Indicator (12V LED Signage, Common Cathode)

EA4204QP-A12B-SBL

Product back view

Technical Specification

Switch:

- Rated Voltage: ≤24VDC
- Rated Current: <25mA

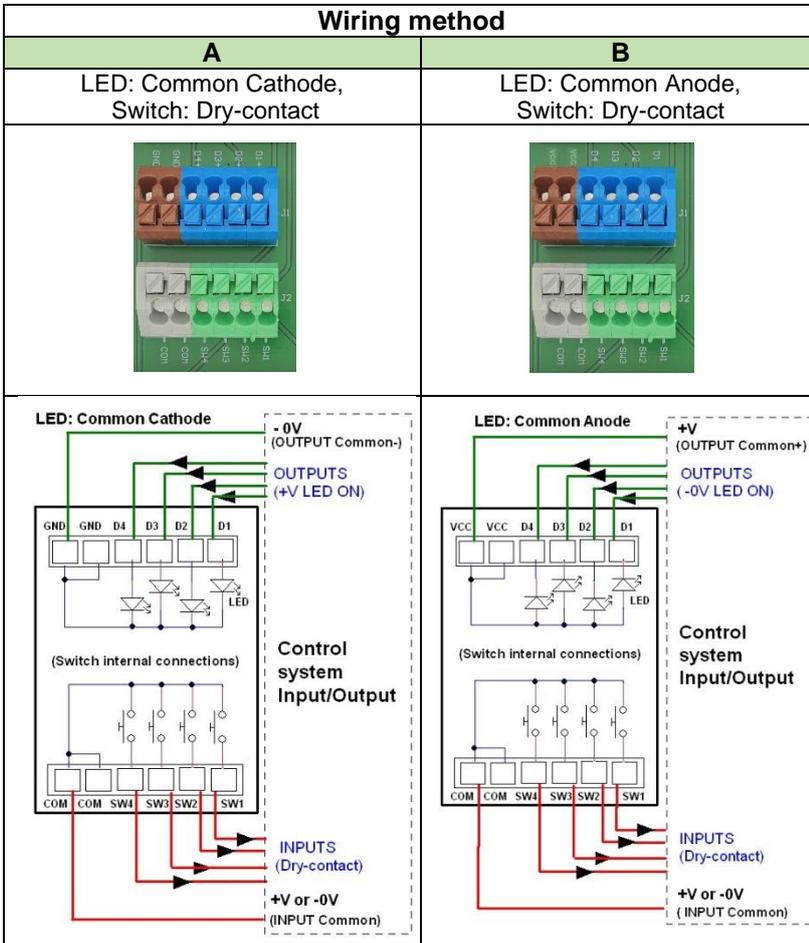**LED Indicator:**

- Voltage: 3.3VDC - 24VDC*
- Current: <5mA

*Customer to specify:

- LED indicator wiring, voltage, colour

  Example: EA4204QP-**A12B** - Common Cathode (refer to wiring method), LED 12VDC, Blue LED

- Lettering/graphics engraved on switch rockers

- Termination: Push-in type
- Recommended wire-size: 0.25 mm^2 - 1.5 mm^2
- Fix Centre: 60.3mm
- Fix Screw: M3.5 x 0.6 x 23.5mm±
- Dimensions: 86 x 86 x 10mm (WxHxD)
- Mounting box: >25mm depth
  - R1150, flush mounting, plastic (80 x 80 x 48.4mm) (WxHxD)
  - M1247, flush mounting, metal (79 x 73 x 47mm) (WxHxD)

Switch order code:

E	A	4	2	0	4	Q	P	-	*b*	*b*	*b*	*b*	-	*c*	*c*	*c*

EA4204QP
(4-gang,
Customised signage)

Wiring method	
A	**B**
LED: Common Cathode, Switch: Dry-contact	LED: Common Anode, Switch: Dry-contact

LED Colour *	
B	Blue
G	Green
R	Red
E	Red/Green

LED Voltage*	
1	3.3VDC
12	12VDC
24	24VDC

Note: D1,SW1- located at bottom-left, D3,SW3 – located at bottom-right (viewing from front of switch)

Product Code	Colour	
EA4204QP-A12B		White
EA4204QP-A12B -SBL		Matt Black (SBL)
EA4204QP-A12B -MSB		Matt Silver Black (MSB)
EA4204QP-A12B -MSL		Matt Silver (MSL)

*Other LED voltage, LED colour, and rocker colour, please contact T&J Sales representative

Product specifications are subject to change without notice to improve reliability, function or design.