

minimalist

Product Code	Description
EB8318	16A 1 Gang Universal Socket Outlet



EB8318




Product back view

Technical Specification

- Rated Voltage: 250V 50/60Hz
- Rated Current: 16A
- Recommended wire size:
 2.5mm² 4.0mm²
- Dimensions:
 86 x 86 x 10mm (WxHxD)
- Fix Centre: 60.3mm
- Fix Screw: M3.5 x 0.6 x 23.5mm±

- Mounting box: >35mm depth
 - R1150, flush mounting, plastic
 (80 x 80 x 48.4mm) (WxHxD)
 - M1247, flush mounting, metal (79 x 73 x 47mm) (WxHxD)
- Comply to standards: IEC-60884 IEC 60669-1 GB/T 16915.1

Installation Method

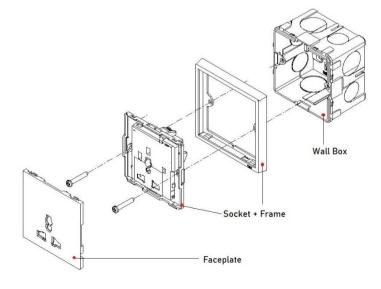

Product specifications are subject to change without notice to improve reliability, function or design.



Applicable on selected type of plugs*:

Plug	Description	
2-pin Plug (Non-earth)	2.5A, 250V	
2-pin Plug (Euro)	2.5A, 250V	
2-pin Plug Round	10/16A, 250V	
2-pin Plug (Non-earth)	10/16A, 250V	
3-pin Plug (BS)	13A, 250V	
3-pin Plug Round (BS)	5A, 250V	
2-pin Australia Plug	7.5A, 250V	
3-pin Australia Plug	10A, 250V	
3-pin Australia Plug	15A, 250V	
3-pin China Plug	6/10A, 250V	
2-pin China Plug	6/10A, 250V	

*Refer to Tech-Memo TM-020118 for more details

Product Code	Colour	
EB8318	White	
EB8318-SBL	Matt Black (SBL)	
EB8318-MSB	Matt Silver Black (MSB)	
EB8318-MSL	Matt Silver (MSL)	
*For other colours, please contact T&J Sales representative		