

Model: C240R


2 Post Car Hoist (Lifting Capacity 4.0T)

EC Type Examination Data

100% Dynamic Load Test ✓





115% Unbalance Load Test ✓

150% Static Load Test ✓

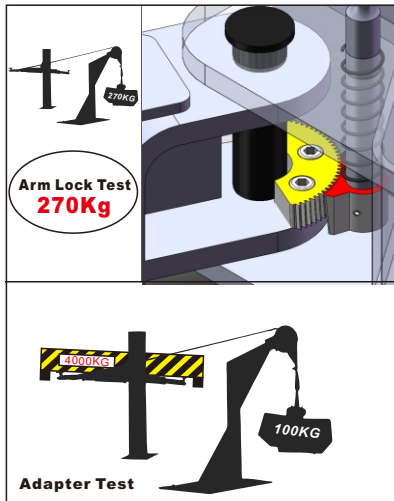

Product Features:

- ◆ **Tubular structure made of 4 weld sections.**
- ◆ **Designed with 2×2 stage long and 2×2 stage short super lowed arms for lifting of wide low profile vehicles, Pad min. height 105mm.**
- ◆ **Equipped with two lifting carriages which do not need maintenance.**
- ◆ **Mechanical support device with manual lock insuring max. safety during locking procedures.**
- ◆ **Non-bearing cables for perfect sync**

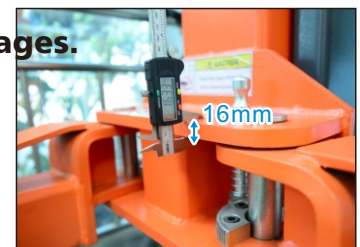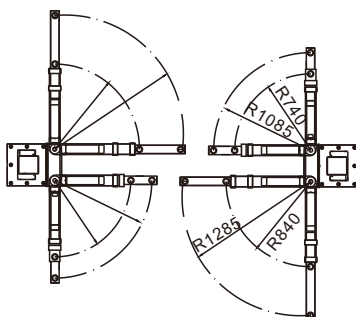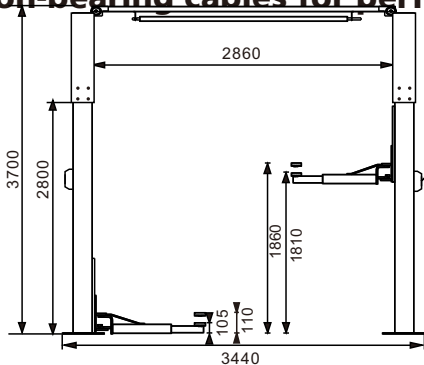

- Single Point Manual Release
- 4000kg Lifting Capacity
- 1860mm Max. Lifting Height
- 3700mm Overall height
- 3440mm Overall Width
- 740mm-1085mm 2 Stage Supporting Arm Length Front
- 840mm-1285mm 2 Stage Supporting Arm Length Rear
- 105mm Adapter Height Min. 150mm Adapter Height Max.
- 2860mm Clear Size Column Spacing • 2480mm Drive Through Spacing
- 2680mm Switch Off Level
- 2.2kw 2Pole Metal Shell Motor 220V/1PH-380V/3PH-400V/3PH 50HZ-60HZ
- ≤60 Sec. Lifting Time
- 20-60 Sec. Lowering Time