




Description & Features:

- Specially designed for fire sprinkler systems
- Suitable for air and water media
- Corrosion resistant case
- Dual scale (psi/kpa) and single scale (psi) pressure ratings
- Approved by Factory Mutual (FM) and listed by Underwriter Laboratory (UL-393), USA and Canada
- Internal pointer travel over-stop
- CRN registered
- 5 year warranty

Specifications

Dial	3.5" (90mm), white aluminum with black and red markings
Case	Black plastic
Lens	Polycarbonate, threaded
Socket	Brass
Connection	1/4" NPT standard, bottom
Bourdon Tube	Phosphor bronze
Movement	Brass
Pointer	Aluminum, black
Welding	Silver Alloy
Working Pressure	Maximum 75% of full scale value
Ambient/Process Temperature	-40°F to 150°F (-40°C to 65°C)
Accuracy	3-2-3% ASME Grade B
Enclosure Rating	IP52

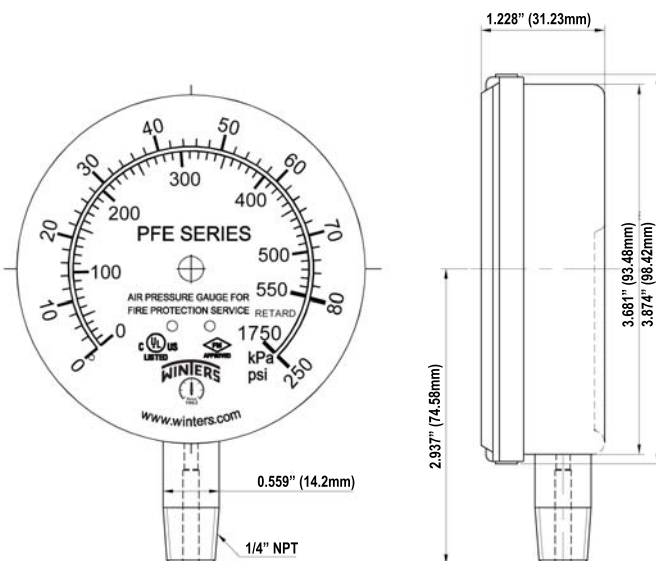

Order Codes (products in bold are normally in stock)

Model	Air	Water	Air/Water
0/80/retard - 250 psi	PFE3932R1	-	-
0 - 300 psi	-	PFE3933R1	PFE3935R1
0/80/retard - 250 psi/kPa	PFE3932	-	-
0 - 300 psi/kPa	-	PFE3933	PFE3935