

Zytel® FR50 NC010

NYLON RESIN

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, we recommend, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry.

Zytel® FR50 NC010 is a 25% Glass Reinforced, Flame Retardant, Polyamide 66

Product information

Resin Identification	PA66-GF25FR(17)	ISO 1043
Part Marking Code)	
ISO designation	>PA66-GF25FR(17)< ISO 16396-PA66,GF25 FR(17),M1F1GNR,S14-100	ISO 11469

Rheological properties

	dry/cond.		
Viscosity number	150 ^[1] /*	cm ³ /g	ISO 307, 1157, 1628
Moulding shrinkage, parallel	0.3/-	%	ISO 294-4, 2577
Moulding shrinkage, normal	0.8/-	%	ISO 294-4, 2577
[1]: 96% Sulfuric acid			

Typical mechanical properties

	dry/cond.		
Tensile Modulus	10000/8000	MPa	ISO 527-1/-2
Stress at break	170/120	MPa	ISO 527-1/-2
Strain at break	2.6/3	%	ISO 527-1/-2
Flexural Modulus	9500/7500	MPa	ISO 178
Charpy impact strength, 23°C	60/-	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	50/-	kJ/m ²	ISO 179/1eU
Charpy impact strength, -40°C	50/-	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	12/13	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	12/11	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -40°C	12/10	kJ/m ²	ISO 179/1eA
Poisson's ratio	0.34/0.34		

Zytel® FR50 NC010

NYLON RESIN

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	262 ^[2] /*	°C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	80/20	°C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	240/*	°C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel, -40-23°C	20/*	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, parallel, 55-160°C	21/*	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal, -40-23°C	55/*	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal, 55-160°C	110/*	E-6/K	ISO 11359-1/-2
RTI, electrical, 0.75mm	130	°C	UL 746B
RTI, electrical, 1.5mm	130	°C	UL 746B
RTI, electrical, 3mm	130	°C	UL 746B
RTI, impact, 0.75mm	105	°C	UL 746B
RTI, impact, 1.5mm	115	°C	UL 746B
RTI, impact, 3mm	115	°C	UL 746B
RTI, strength, 0.75mm	105	°C	UL 746B
RTI, strength, 1.5mm	115/*	°C	UL 746B
RTI, strength, 3mm	120	°C	UL 746B

[2]: 1st heating

Flammability

	dry/cond.		
Burning Behav. at 1.5mm nom. thickn.	V-0/*	class	IEC 60695-11-10
Thickness tested	1.5/*	mm	IEC 60695-11-10
UL recognition	yes/*		UL 94
Burning Behav. at thickness h	V-0/*	class	IEC 60695-11-10
Thickness tested	0.35/*	mm	IEC 60695-11-10
UL recognition	yes/*		UL 94
Burning Behav. 5V at thickness h	5VA/*	class	IEC 60695-11-20
Thickness tested	1.5/*	mm	IEC 60695-11-20
UL recognition	yes/*		UL 94
Glow Wire Flammability Index, 0.75mm	960/-	°C	IEC 60695-2-12
Glow Wire Flammability Index, 1.5mm	960/-	°C	IEC 60695-2-12
Glow Wire Flammability Index, 3mm	960/-	°C	IEC 60695-2-12
Glow Wire Ignition Temperature, 0.75mm	900/-	°C	IEC 60695-2-13
Glow Wire Ignition Temperature, 1.5mm	900/-	°C	IEC 60695-2-13
Glow Wire Ignition Temperature, 3mm	930/-	°C	IEC 60695-2-13
FMVSS Class	SE/B		ISO 3795 (FMVSS 302)

Electrical properties

	dry/cond.		
Volume resistivity	>1E13/2.7E10	Ohm.m	IEC 62631-3-1
Surface resistivity	*/1.8E14 ^[3]	Ohm	IEC 62631-3-2
Electric strength	24 ^[4] /22	kV/mm	IEC 60243-1
Comparative tracking index	275/-		IEC 60112


[3]: dry

[4]: 2mm thickness

Zytel® FR50 NC010

NYLON RESIN


Stress-strain (dry)

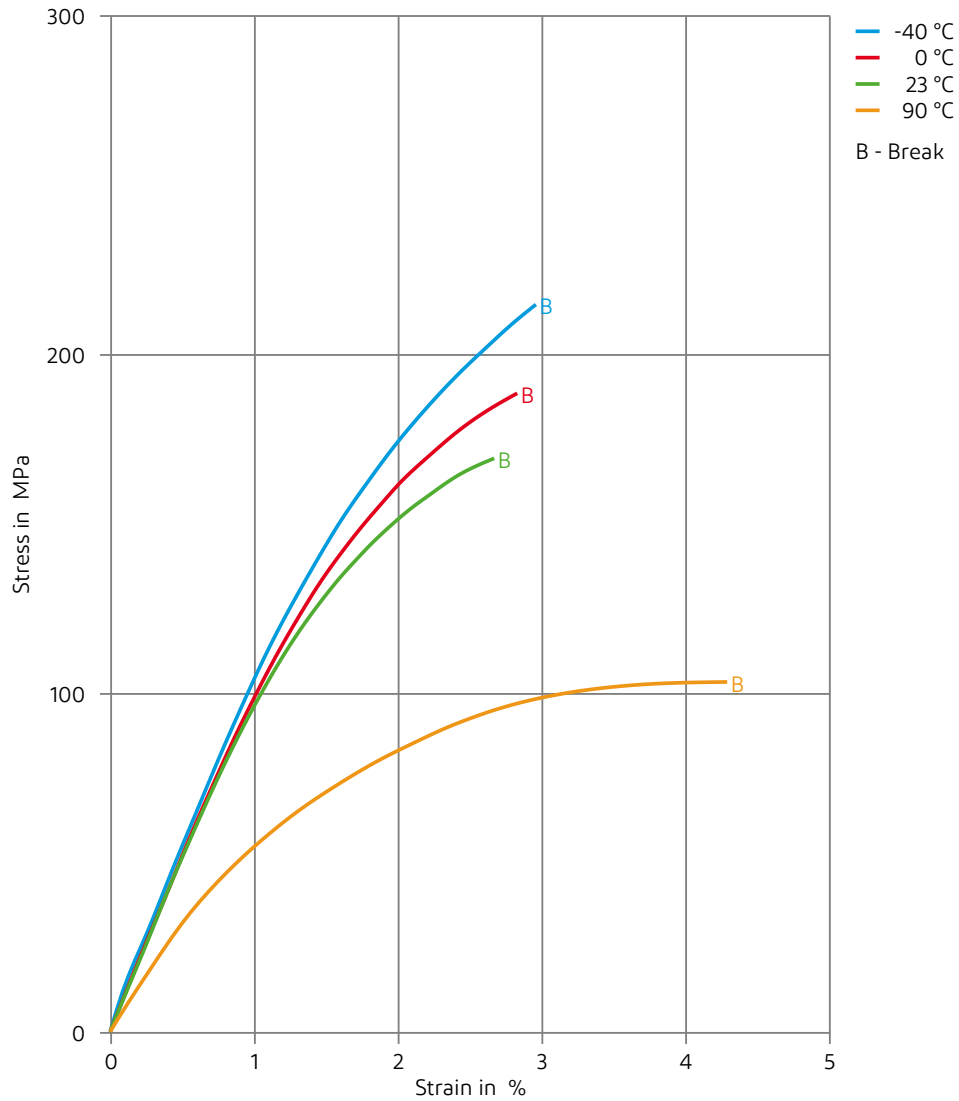

Zytel® FR50 NC010

NYLON RESIN


Stress-strain (cond.)

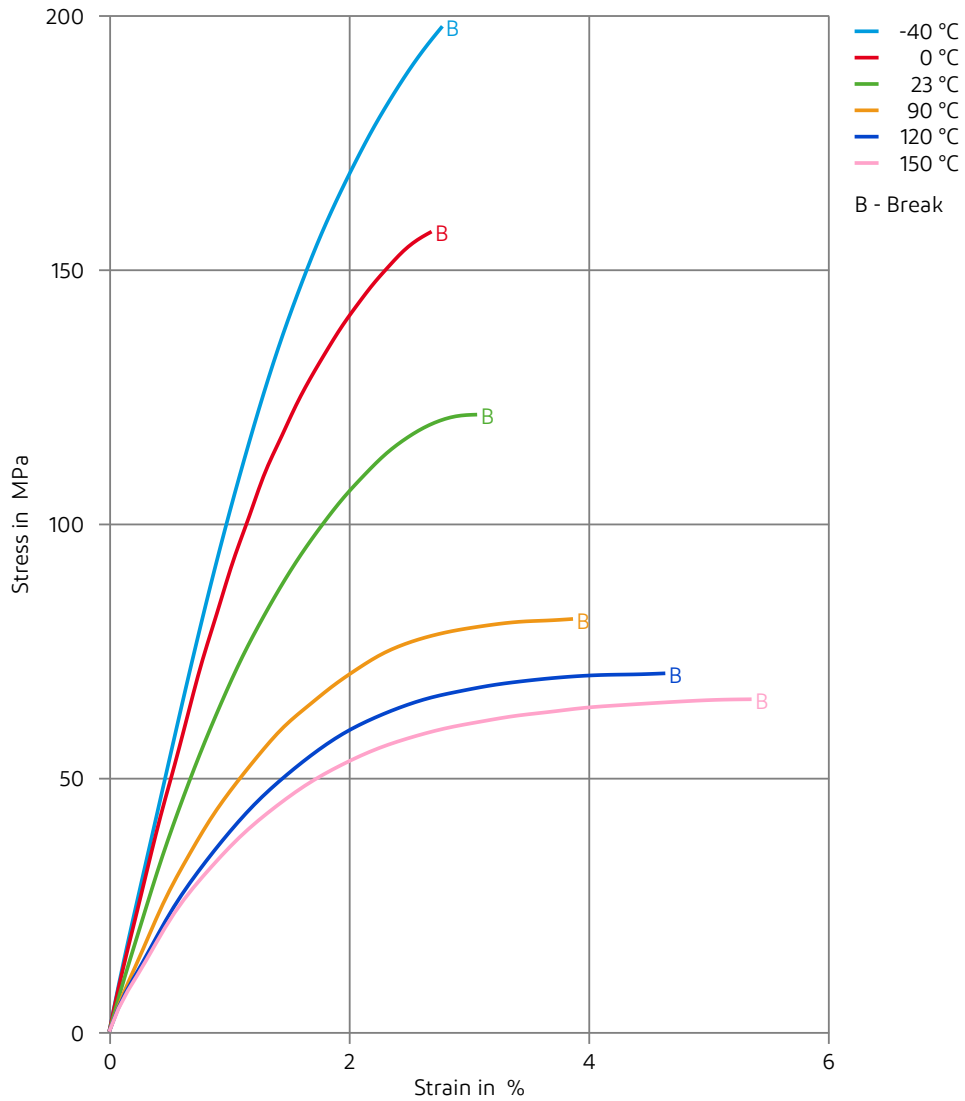

Zytel® FR50 NC010

NYLON RESIN


Secant modulus-strain (dry)

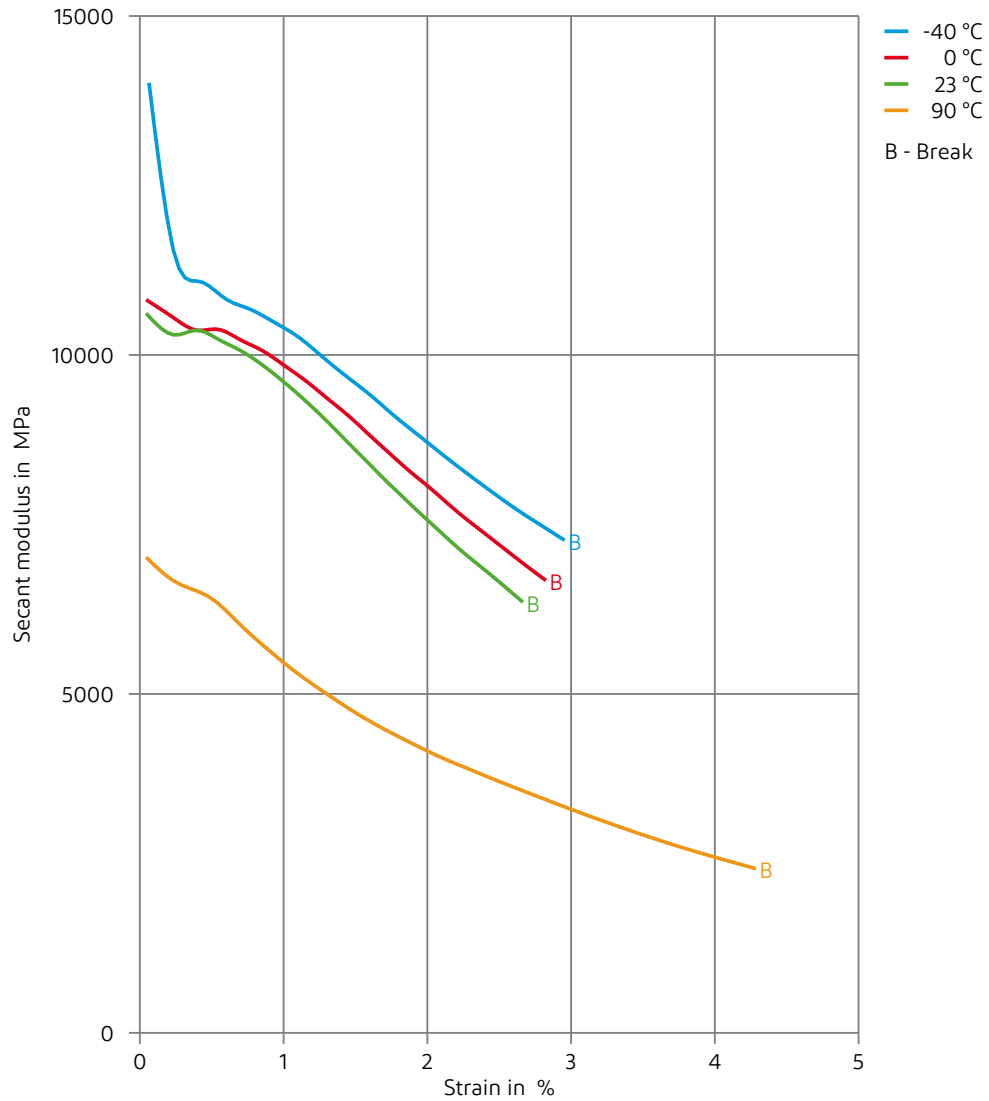

Zytel® FR50 NC010

NYLON RESIN

Secant modulus-strain (cond.)

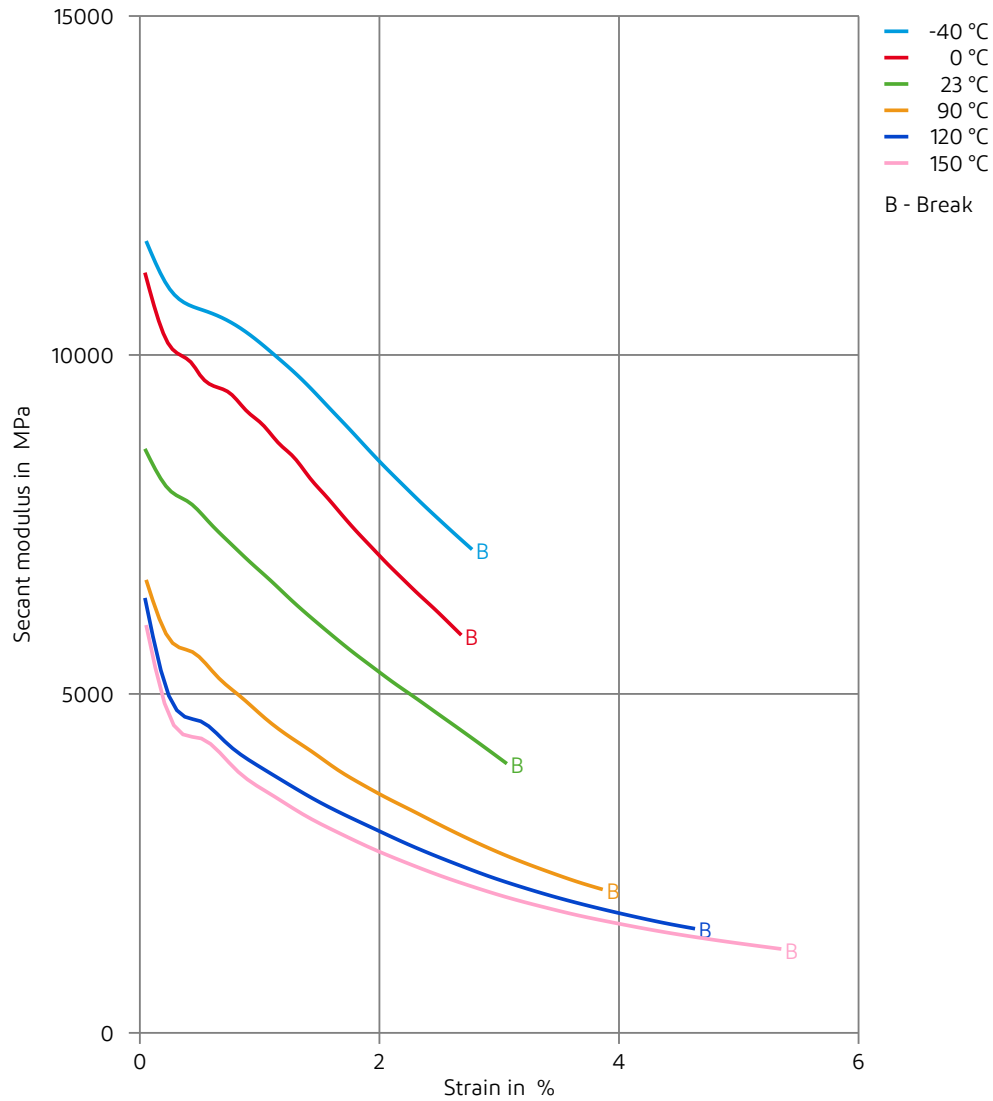

Zytel® FR50 NC010

NYLON RESIN

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass), 23°C
- ✓ Citric Acid solution (10% by mass), 23°C
- ✓ Lactic Acid (10% by mass), 23°C
- ✗ Hydrochloric Acid (36% by mass), 23°C
- ✗ Nitric Acid (40% by mass), 23°C
- ✗ Sulfuric Acid (38% by mass), 23°C
- ✗ Sulfuric Acid (5% by mass), 23°C
- ✗ Chromic Acid solution (40% by mass), 23°C

Bases

- ✗ Sodium Hydroxide solution (35% by mass), 23°C
- ✓ Sodium Hydroxide solution (1% by mass), 23°C
- ✓ Ammonium Hydroxide solution (10% by mass), 23°C

Alcohols

- ✓ Isopropyl alcohol, 23°C
- ✓ Methanol, 23°C
- ✓ Ethanol, 23°C

Hydrocarbons

- ✓ n-Hexane, 23°C
- ✓ Toluene, 23°C
- ✓ iso-Octane, 23°C

Ketones

- ✓ Acetone, 23°C

Ethers

- ✓ Diethyl ether, 23°C

Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23°C
- ✓ SAE 10W40 multigrade motor oil, 130°C
- ✓ SAE 80/90 hypoid-gear oil, 130°C
- ✓ Insulating Oil, 23°C

Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5, 60°C
- ✓ ISO 1817 Liquid 2 - M15E4, 60°C
- ✓ ISO 1817 Liquid 3 - M3E7, 60°C
- ✓ ISO 1817 Liquid 4 - M15, 60°C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23°C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 90°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), >90°C

Zytel® FR50 NC010

NYLON RESIN

Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C
- ✓ Sodium Carbonate solution (20% by mass), 23°C
- ✓ Sodium Carbonate solution (2% by mass), 23°C
- ✗ Zinc Chloride solution (50% by mass), 23°C

Other

- ✓ Ethyl Acetate, 23°C
- ✗ Hydrogen peroxide, 23°C
- ✓ DOT No. 4 Brake fluid, 130°C
- ✓ Ethylene Glycol (50% by mass) in water, 108°C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23°C
- ✓ 50% Oleic acid + 50% Olive Oil, 23°C
- ✓ Water, 23°C
- ✗ Water, 90°C
- ✗ Phenol solution (5% by mass), 23°C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

Mobility & Materials

The information set forth herein is furnished free of charge, is based on technical data that Celanese believes to be reliable, and represents typical values that fall within the normal range of properties. This information relates only to the specific material designated and may not be valid for such material used in combination with other materials or in other processes. It is intended for use by persons having technical skill, at their own discretion and risk. This information should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards and comply with applicable law. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

CAUTION: Do not use Celanese materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from Celanese under a written contract or other acknowledgement that is consistent with the Celanese policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your Celanese representative.

Celanese's sole warranty is that our products will meet our standard sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, CELANESE SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR NON-INFRINGEMENT. CELANESE DISCLAIMS LIABILITY FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.