




SHOULDER PILOT PUNCHES

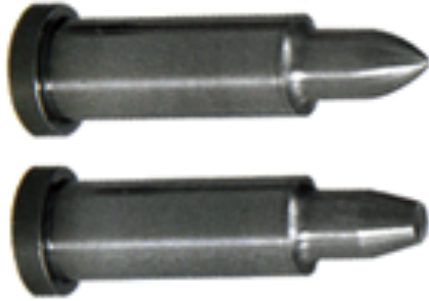

L-STA

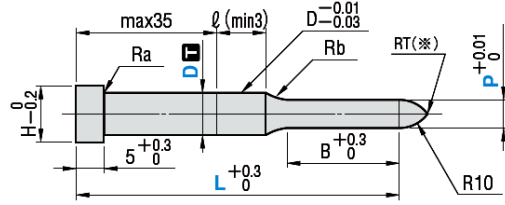

L-TPA

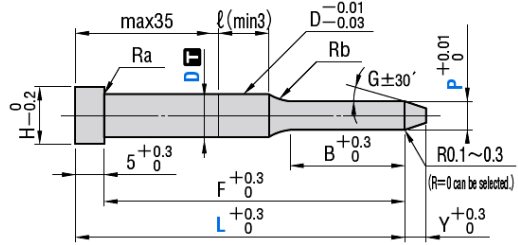

Dimension: MM

Catalog No.			L					0.01mm Increments		B	H	Y			
Type	B Point Length	D						min.	P				max.		
L-STAS (SKD-11)	S	3	42	52	62	72	1.00 ~ 2.99		10	5	2				
		4	42	52	62	72	1.00 ~ 3.99			7					
		5	42	52	62	72	2.00 ~ 4.99			8	3				
		6	42	52	62	72	2.50 ~ 5.99			9					
		L-TPAS (SKD-11)		8	(42)	52	62	72	82	92	3.00 ~ 7.99		11	5	
				10	(42)	52	62	72	82	92	102	3.00 ~ 9.99			13
				13	(42)	52	62	72	82	92	102	6.00 ~ 12.99		16	8
				16	(42)	52	62	72	82	92	102	10.00 ~ 15.99		19	
				20	(42)	52	62	72	82	92	102	13.00 ~ 19.99		23	
		L-STAL (SKD-11)	L	3		52	62	72	1.00 ~ 2.99		15	5	2		
4				52	62	72	1.00 ~ 3.99		7						
5				52	62	72	2.00 ~ 4.99		8	3					
6				52	62	72	2.50 ~ 5.99		9						
L-TPAL (SKD-11)				8		52	62	72	82	92	3.00 ~ 7.99		11	5	
				10		52	62	72	82	92	102	3.00 ~ 9.99			13
				13		52	62	72	82	92	102	6.00 ~ 12.99		16	8
				16			62	72	82	92	102	10.00 ~ 15.99		19	
				20			62	72	82	92	102	13.00 ~ 19.99		23	
L-STAX (SKD-11)	X			3		52	62	72	1.20 ~ 2.99		21	5	2		
		4		52	62	72	1.20 ~ 3.99		7						
		5			62	72	2.00 ~ 4.99		27	8		3			
		6			62	72	2.50 ~ 5.99			9					
		L-TPAX (SKD-11)		8			62	72	82	92	3.00 ~ 7.99		11	5	
				10			62	72	82	92	102	3.00 ~ 9.99			13
				13			62	72	82	92	102	6.00 ~ 12.99		16	8
				16				72	82	92	102	10.00 ~ 15.99		19	
				20				72	82	92	102	13.00 ~ 19.99		23	
							72	82	92	102	18.00 ~ 24.99		28		

How to order : Type D – L – P x Qty
(L-STAS 10 – 72 – P3.40 x 5pcs)

Material : SKD-11 / SKH-51
Hardness : HRC 60° - 62° / HRC 61° - 63°