



# **LYE** ***Y-STRAINER***

Model No. : **LYE 881**




- Working pressure : 16 Bars
- Shell test pressure : 24 Bars
- Working temperature : < 100°C
- Media : Water, Oil
- Flanges designed and drilled according to BS EN1092-2 Table 9



# LYE Y-STRAINER

Model No. : LYE 881

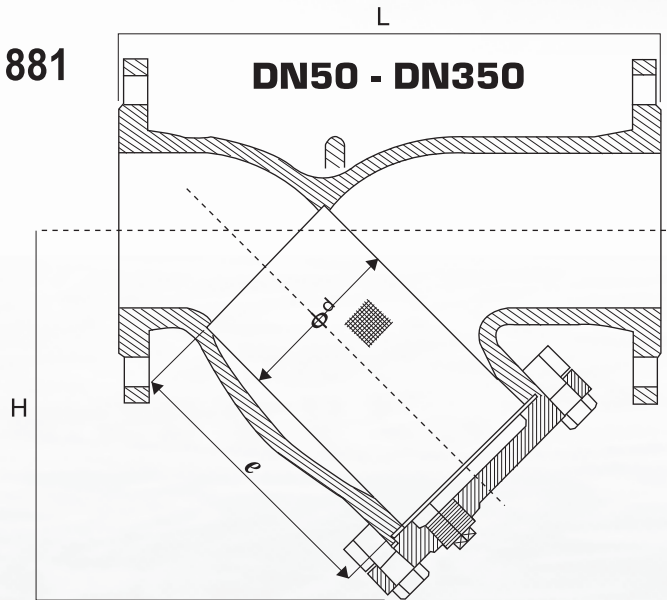

Dimension : mm

Size	DN50	DN65	DN80	DN100	DN125	DN150	DN200	DN250	DN300	DN350
L	225	273	292	352	390	470	543	660	762	949
H	150	207	225	236	260	319	416	484	555	735
$\phi^d$	56	78	88	110	140	170	210	270	320	370
e	114	179	185	184	200	244	330	400	455	645

Material for main parts

Parts	Material	Standard Ref.	Grade
Body	Ductile Iron	BS EN 1563	EN-GJS-500-7
Cover	Ductile Iron	BS EN 1563	EN-GJS-500-7
Screen	Stainless Steel	BS EN 10088-3	304S31
Bolt	Mill Steel	BS4190	Hot Dipped Galvanised
Drain Plug	Stainless Steel	BS EN 10088-3	304S31
Gasket	Rubber	MS 672, BS EN 681	EPDM



Please Note: Technical data provided is indicative only and may be subject to change without notice



**LYE MANUFACTURING SDN. BHD. (32836-H)**  
**Manufacturer of Valves, Hydrants, Joints, Fittings & Manhole Covers.**  
 Lot 1844, Jalan KP8 8, Kampung Baru Balakong, 43300 Kajang, Selangor Darul Ehsan, Malaysia.  
**FACTORY:** Tel : 603 - 8961 1623, Fax : 603 - 8961 1092  
**SALES:** Tel : 603 - 6140 3131 (Hunting Line) Fax : 603 - 6140 5858  
**WEBSITE:** www.lye.com.my  
**EMAIL:** enquiry@lye.com.my

