

B30 & B33 Series Materials

BradyID.com/s35

3 Reasons Why Brady Is The Leader in Labeling



Easy "Drop-In" Labels & Ribbons

- Removes guesswork & never upside down
- Changeovers in 20-seconds saves you time
- No complicated threading or wrapping around printheads or spindles



Smart Chip Auto Populates:

- Label Size
- Label Color
- Pre-Printed Headers

The Printer Knows What You Loaded

- Printer reads smart chip on label rolls and ribbons loaded
- Automatically sets size and color in the printer and software
- No need to manually enter dimensions or scroll through endless screens to find your size



Labels That Last

- Brady labels are reliable and durable because we design them in-house, then rigorously test them
- Nothing leaves our doors without meeting our high standards
- Some last up to 10 years outdoors; stick to rough surfaces or smooth; dirty surfaces or clean; in harsh conditions or normal conditions. With reliability like that, you'll only need to make these labels once

B30 & B33 Series Material Supplies

Specifically designed for use in the
BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 Printers.

The following pages contain label materials that have been specifically designed to use with several Brady Printers. Look for printer compatibility within each table to ensure you find the labels compatible for your application and printer combination.



BBP37 Cutter Compatibility

Label materials with a Scissors Icon can be used with the BBP37 Printer's XY-Plotter Cutter to cut out shapes and text 0.75" or taller.



B30 & B33 Series Materials

BradyID.com/s35

Pre-Printed GHS / CLP Chemical Labels (B-7569)

- Blank labels with pre-printed red diamonds allow the printer to produce 2-color GHS / CLP labels in one print pass
- 3 sizes of labels, each with 6 diamond layouts that match templates in the printer app (if applicable) or in the Brady Workstation GHS App
- Indoor/outdoor vinyl material and durable inks withstand exposure to moisture, chemicals and handling
- You can also make GHS labels with white tape and black/red ribbon to reduce your supply inventory (BBP35/37 only)

Service Temp: -4°F to 180°F Application Temp: 50°F to 180°F
Average Outdoor Durability: 3-5 years



Fits Printer Model(s)	Catalog #	B#	Material	Legend	Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP30, 31, 33, 35, 37	B30-260-7569-CLP1	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	1	340	B30-R10000
BBP30, 31, 33, 35, 37	B30-261-7569-CLP1	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
BBP30, 31, 33, 35, 37	B30-262-7569-CLP1	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
BBP30, 31, 33, 35, 37	B30-260-7569-CLP2	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	1	340	B30-R10000
BBP30, 31, 33, 35, 37	B30-261-7569-CLP2	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
BBP30, 31, 33, 35, 37	B30-262-7569-CLP2	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
BBP30, 31, 33, 35, 37	B30-260-7569-CLP3A	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	1	340	B30-R10000
BBP30, 31, 33, 35, 37	B30-261-7569-CLP3A	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
BBP30, 31, 33, 35, 37	B30-262-7569-CLP3A	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
BBP30, 31, 33, 35, 37	B30-260-7569-CLP3B	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	1	340	B30-R10000
BBP30, 31, 33, 35, 37	B30-261-7569-CLP3B	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
BBP30, 31, 33, 35, 37	B30-262-7569-CLP3B	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
BBP30, 31, 33, 35, 37	B30-260-7569-CLP4A	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	1	340	B30-R10000
BBP30, 31, 33, 35, 37	B30-261-7569-CLP4A	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
BBP30, 31, 33, 35, 37	B30-262-7569-CLP4A	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
BBP30, 31, 33, 35, 37	B30-260-7569-CLP4B	B-7569	Vinyl		2.170 (55.0)	3.350 (85.0)	1	340	B30-R10000
BBP30, 31, 33, 35, 37	B30-261-7569-CLP4B	B-7569	Vinyl		2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
BBP30, 31, 33, 35, 37	B30-262-7569-CLP4B	B-7569	Vinyl		4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
BBP30, 31, 33, 35, 37	B30-18-7569-CLP4C	B-7569	Vinyl		1.000 (25.4)	3.000 (76.2)	1	1000	B30-R10000

▶ Brady WorkStation GHS Label App

- Built-in pre-formatted label layouts and approved GHS symbols
- Pre-worded hazard statements and GHS symbols that just click and drag into the layout (no need to type everything in)
- Once you create a label, the data is there and you can print any size
- Automatic "block-out" of unused diamonds on pre-printed supplies so you can inventory fewer label rolls
- No driver needed when connected to a Brady printer



See page 448 for more information.


B30 & B33 Series Materials

BradyID.com/s35

Indoor/Outdoor Vinyl (B-595)

- For general facility and safety identification: Our best industrial vinyl yet
- Durable, low-shrink vinyl with our most aggressive adhesive
- Conforms to irregular, curved, rough and highly textured surfaces (painted cinder blocks, uneven wood, textured plastics, paper-jacketed pipes, powder-coated surfaces)
- Adheres to "difficult" low-surface energy items (PVC piping, blow-molded equipment cases, ABS plastics, recycled plastics)

Service Temp: -40°F to 180°F Application Temp: 0°F to 180°F
Average Outdoor Durability: 8-10 year outdoor vinyl label durability.
Agency approvals: **RoHS**



- Facility and Safety Applications:**
- 5S Labels
 - Pipe Markers
 - Safety & Warning Labels
 - Equipment & Panel Labels
 - Arc Flash & Chemical Labels
 - And More!

Benchtop Printers

B30 Series

Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-595-WT	B-595	White	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-595-WT	B-595	White	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-595-WT	B-595	White	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-3000-595-WT	B-595	White	3.000 (76.2)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-595-WT	B-595	White	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-595-YL	B-595	Yellow	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-595-YL	B-595	Yellow	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-595-YL	B-595	Yellow	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-3000-595-YL	B-595	Yellow	3.000 (76.2)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-595-YL	B-595	Yellow	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-595-RD	B-595	Red	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-595-RD	B-595	Red	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-595-RD	B-595	Red	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-3000-595-RD	B-595	Red	3.000 (76.2)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-595-RD	B-595	Red	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-595-BL	B-595	Blue	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-595-BL	B-595	Blue	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-595-BL	B-595	Blue	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-3000-595-BL	B-595	Blue	3.000 (76.2)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-595-BL	B-595	Blue	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-595-GN	B-595	Green	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-595-GN	B-595	Green	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-595-GN	B-595	Green	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-3000-595-GN	B-595	Green	3.000 (76.2)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-595-GN	B-595	Green	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-595-OR	B-595	Orange	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-595-OR	B-595	Orange	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-595-OR	B-595	Orange	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-3000-595-OR	B-595	Orange	3.000 (76.2)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-595-OR	B-595	Orange	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-595-BK	B-595	Black	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-595-BK	B-595	Black	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-595-BK	B-595	Black	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-3000-595-BK	B-595	Black	3.000 (76.2)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-595-BK	B-595	Black	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-595-BR	B-595	Brown	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-595-BR	B-595	Brown	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-595-BR	B-595	Brown	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-3000-595-BR	B-595	Brown	3.000 (76.2)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-595-BR	B-595	Brown	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-595-GD	B-595	Gold	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-595-GD	B-595	Gold	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-595-GD	B-595	Gold	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-3000-595-GD	B-595	Gold	3.000 (76.2)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-595-GD	B-595	Gold	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-595-GY	B-595	Gray	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-595-GY	B-595	Gray	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-595-GY	B-595	Gray	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-3000-595-GY	B-595	Gray	3.000 (76.2)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-595-GY	B-595	Gray	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-595-PL	B-595	Purple	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-595-PL	B-595	Purple	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-595-PL	B-595	Purple	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-3000-595-PL	B-595	Purple	3.000 (76.2)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-595-PL	B-595	Purple	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-595-CL	B-595	Clear	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-595-CL	B-595	Clear	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-595-CL	B-595	Clear	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-3000-595-CL	B-595	Clear	3.000 (76.2)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-595-CL	B-595	Clear	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000

U.S. Patent Nos. 5,823,689; 6,570,602. Additional Patents Pending.

B30 & B33 Series Materials

BradyID.com/s35

Low-Halide Polyester (B-569)

- Low-halide content for labeling stainless steel pipes and surfaces
- Applies best to very smooth surfaces and ideal for mounting to rigid panels

Service Temp: -40°F to 212°F Application Temp: 0°F to 212°F
Average Outdoor Durability: 3-5 years



Figure 33



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-569-WT	B-569	White	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-569-WT	B-569	White	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-569-WT	B-569	White	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-3000-569-WT	B-569	White	3.000 (76.2)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	✗ Fig. 33	B30C-4000-569-WT	B-569	White	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-569-YL	B-569	Yellow	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-569-YL	B-569	Yellow	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-569-YL	B-569	Yellow	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	✗ Fig. 33	B30C-4000-569-YL	B-569	Yellow	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-569-RD	B-569	Red	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-569-RD	B-569	Red	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-569-RD	B-569	Red	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	✗ Fig. 33	B30C-4000-569-RD	B-569	Red	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-569-BL	B-569	Blue	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-569-BL	B-569	Blue	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-569-BL	B-569	Blue	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	✗ Fig. 33	B30C-4000-569-BL	B-569	Blue	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-569-LB	B-569	Light Blue	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-569-LB	B-569	Light Blue	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-569-LB	B-569	Light Blue	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	✗ Fig. 33	B30C-4000-569-LB	B-569	Light Blue	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-569-SB	B-569	Sky Blue	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-569-SB	B-569	Sky Blue	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-569-SB	B-569	Sky Blue	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	✗ Fig. 33	B30C-4000-569-SB	B-569	Sky Blue	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-569-GN	B-569	Green	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-569-GN	B-569	Green	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-569-GN	B-569	Green	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	✗ Fig. 33	B30C-4000-569-GN	B-569	Green	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-569-OR	B-569	Orange	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-569-OR	B-569	Orange	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-569-OR	B-569	Orange	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	✗ Fig. 33	B30C-4000-569-OR	B-569	Orange	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-569-BK	B-569	Black	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-569-BK	B-569	Black	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-569-BK	B-569	Black	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	✗ Fig. 33	B30C-4000-569-BK	B-569	Black	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-569-BR	B-569	Brown	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-569-BR	B-569	Brown	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-569-BR	B-569	Brown	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	✗ Fig. 33	B30C-4000-569-BR	B-569	Brown	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-569-OC	B-569	Ochre	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-569-OC	B-569	Ochre	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-569-OC	B-569	Ochre	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	✗ Fig. 33	B30C-4000-569-OC	B-569	Ochre	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-569-TN	B-569	Tan	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-569-TN	B-569	Tan	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-569-TN	B-569	Tan	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	✗ Fig. 33	B30C-4000-569-TN	B-569	Tan	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-569-GY	B-569	Gray	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-569-GY	B-569	Gray	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-569-GY	B-569	Gray	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	✗ Fig. 33	B30C-4000-569-GY	B-569	Gray	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-569-PL	B-569	Purple	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-569-PL	B-569	Purple	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-569-PL	B-569	Purple	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	✗ Fig. 33	B30C-4000-569-PL	B-569	Purple	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000-WT
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-569-PK	B-569	Pink	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-569-PK	B-569	Pink	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-569-PK	B-569	Pink	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	✗ Fig. 33	B30C-4000-569-PK	B-569	Pink	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-569-CL	B-569	Clear	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-569-CL	B-569	Clear	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-569-CL	B-569	Clear	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	✗ Fig. 33	B30C-4000-569-CL	B-569	Clear	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000

Benchtop Printers

B30 Series

B30 & B33 Series Materials

BradyID.com/s35

Pre-Printed Pre-Cut Blank Sign Headers (B-595)

- Allows printer to create multicolor signs fast - in a single print pass
- Headers meet NFPA 70E, OSHA 1910.145 and ASME/ANSI Z535 standards
- Indoor/outdoor grade material conforms to rough, highly textured and "difficult to adhere to" surfaces

Service Temp: -40°F to 180°F Application Temp: 0°F to 180°F
Average Outdoor Durability: 8-10 years
Agency Approvals: **RoHS**




Figure 70



Fits Printer Model(s)	Diagram	Catalog #	B#	Material	Header	Label Height A Inch (mm)	Label Width B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP30, 31, 33, 35, 37	Fig. 70	B30-241-595-OSHADA	B-595	Vinyl	DANGER	2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-25-595-OSHADA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-241-595-OSHACA	B-595	Vinyl	CAUTION	2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-25-595-OSHACA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-241-595-ANSICA	B-595	Vinyl	CAUTION	2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-25-595-ANSICA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-241-595-ANSIDA	B-595	Vinyl	DANGER	2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-25-595-ANSIDA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-241-595-ANSIWA	B-595	Vinyl	WARNING	2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-25-595-ANSIWA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-241-595-ANSINO	B-595	Vinyl	NOTICE	2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-25-595-ANSINO	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-25-595-PREC	B-595	Vinyl	NOTICE	4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-25-595-PEL	B-595	Vinyl	NOTICE	4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-242-595-BLNKWT	B-595	Vinyl		1.125 (28.6) *	2.750 (69.8)	1	300	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-241-595-BLNKWT	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-219-595-BLNKWT	B-595	Vinyl		2.250 (57.5) *	3.750 (95.3)	1	250	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-25-595-BLNKWT	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-241-595-BLNKYL	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 70	B30-25-595-BLNKYL	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000

*Label pre-sized to fit blank rigid valve tags, but can also be used on its own as general purpose label.

Benchtop Printers

B30 Series

Non-Adhesive Tags (B-551)

- Non-adhesive semi-rigid card stock in pre-cut and continuous styles
- Tags are pre-cut with hole or easy to hole-punch, are micro-perforated between tags to separate cleanly, and some feature chamfered corners
- Snap-in plastic grommets available for extra strength around mounting hole (Catalog #20596, 100/bag)

Service Temp: -40°F to 193°F
Average Outdoor Durability: Up to 2 years




Figure 33b




Figure 69



Fits Printer Model(s)	Diagram	Catalog #	B#	Header	Tag Width A Inch (mm)	Tag Height B Inch (mm)	Tags Per Row	Tags Per Roll	Rec. Ribbon
BBP30, 31, 33, 35, 37	Fig. 69	B30-255-551-ANSIDA	B-551	DANGER	3.250 (82.6)	5.750 (146.1)	1	100	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 69	B30-255-551-OSHADA	B-551	DANGER	3.250 (82.6)	5.750 (146.1)	1	100	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 69	B30-255-551-ANSICA	B-551	CAUTION	3.250 (82.6)	5.750 (146.1)	1	100	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 69	B30-255-551-WHT	B-551		3.250 (82.6)	5.750 (146.1)	1	100	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33b	B30C-2500-551-WT	B-551		2.500 (63.5)	50ft. (15.2m)	1 roll (cont.)		B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33b	B30C-3250-551-WT	B-551		3.250 (82.6)	50ft. (15.2m)	1 roll (cont.)		B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33b	B30C-4250-551-WT	B-551		4.250 (107.9)	50ft. (15.2m)	1 roll (cont.)		B30-R10000

Pro-Labeling Techniques:



Arc Flash Labels

Use Brady Workstation or the built-in printer app to create Arc Flash labels specific to your equipment. The easy to use app prompts you for text for each panel variable then automatically lays out the complete label.

- **With BBP30, 31, 33:** Use pre-printed header supplies which feature ANSI Danger or Warning headers already on the material.
- **With BBP35 & 37:** Use pre-printed header supplies or simply print the colored header using a multi-color ribbons and a continuous white tape.

Suggested Supplies with Pre-printed Headers

Fits Printer Model(s)	Catalog #	Color	Size	Qty Per Roll
BBP30, 31, 33, 35, 37	B30-25-595-ANSIWA	ANSI WARNING Header	4.0" x 6.0"	175 pcs
BBP30, 31, 33, 35, 37	B30-241-595-ANSIWA	ANSI WARNING Header	2.25" x 3.0"	300 pcs
BBP30, 31, 33, 35, 37	B30-25-595-ANSIDA	ANSI DANGER Header	4.0" x 6.0"	175 pcs
BBP30, 31, 33, 35, 37	B30-241-595-ANSIDA	ANSI DANGER Header	2.25" x 3.0"	300 pcs
BBP30, 31, 33, 35, 37	B30-R10000	Black Ribbon		

Suggested Supplies when using BBP35, 37 and white continuous tape

Fits Printer Model(s)	Catalog #	Color	Size
BBP37, 35*	B30C-4000-595-WT	White	4.0" x 100 ft
BBP37, 35*	B30C-2250-595-WT	White	2.25" x 100 ft
BBP37, 35	B30-R10000-KO-8	Black & Orange Ribbon	
BBP37, 35	B30-R10000-KRBO-8	Black, Red, Blue & Orange Ribbon	
BBP37, 35	B30-R10000-KR-8	Black, Red	


* Supply fits BBP35, 37 for this application, fits BBP35, 37, 30, 31, 33 for other applications.



Blank Rigid Tags

Catalog #	Color	Tag Size	Recessed Area for Label
87696	White	2.1" x 3.6"	1.5" x 3"
87697	White	3.1" x 4.6"	2.5" x 4"
41922	Yellow	2.1" x 3.6"	1.5" x 3"
41923	Yellow	3.1" x 4.6"	2.5" x 4"
41924	Red	2.1" x 3.6"	1.5" x 3"
41925	Red	3.1" x 4.6"	2.5" x 4"
41926	Blue	2.1" x 3.6"	1.5" x 3"
41927	Blue	3.1" x 4.6"	2.5" x 4"
41928	Green	2.1" x 3.6"	1.5" x 3"
41929	Green	3.1" x 4.6"	2.5" x 4"
87694	Orange	2.1" x 3.6"	1.5" x 3"
87695	Orange	3.1" x 4.6"	2.5" x 4"
87712	Tan	2.1" x 3.6"	1.5" x 3"
87713	Tan	3.1" x 4.6"	2.5" x 4"
87710	Brown	2.1" x 3.6"	1.5" x 3"
87711	Brown	3.1" x 4.6"	2.5" x 4"
87698	Gray	2.1" x 3.6"	1.5" x 3"
87699	Gray	3.1" x 4.6"	2.5" x 4"
41920	Black	2.1" x 3.6"	1.5" x 3"
41921	Black	3.1" x 4.6"	2.5" x 4"
142133	Variety Pack*	-	-

* Variety Pack combines 30 tags including at least one of each size and color. Perfect for evaluating which sizes and colors you need.

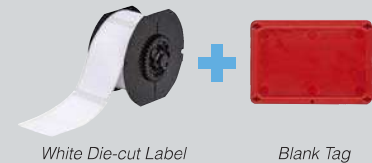

Make Your Own Rigid Valve Tags

Print labels on your Brady printer and apply them to these industrial-grade plastic tags

- Die-cut labels sized to fit the recessed area on the rigid tag
- Outdoor tag withstands temps -40°F to 180°F

Tag Size

2.1" x 3.6" Tag accepts labels 1.5" x 3" or smaller
3.1" x 4.6" Tag accepts labels 2.5" x 4" or smaller

Suggested Printing Supplies for Rigid Valve Tags

	Catalog #	Color	Label Size	Labels per Roll
BBP30, 31, 33, 35, 37	B30-242-595-BLNKWT	White	1.125" x 2.75" (for SM tag)	300
BBP30, 31, 33, 35, 37	B30-219-595-BLNKWT	White	2.25" x 3.75" (for LG tag)	250
BBP30, 31, 33, 35, 37	B30-R10000	Black	Cont. 200 ft. Print Ribbon	-

B30 & B33 Series Materials

BradyID.com/s35

Pre-Printed Right-To-Know Chemical Labels (B-595)

- Allows printer to produce 5-color chemical labels in a single print pass
- Indoor/outdoor grade material withstands exposure to moisture, chemicals and handling

Service temp: -40°F to 180°F Application temp: 0°F to 180°F
Average Outdoor Durability: 8 to 10 years
Agency approvals: **RoHS**



Fits Printer Model(s)	Catalog #	B#	Legend	Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP31, 33, 35, 37 Only	B30-244-595-NFPA	B-595		2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
BBP31, 33, 35, 37 Only	B30-245-595-NFPA	B-595		2.250 (57.5)	4.000 (101.6)	1	240	B30-R10000
BBP31, 33, 35, 37 Only	B30-263-595-NFPA	B-595		4.000 (101.6)	6.250 (158.8)	1	170	B30-R10000
BBP31, 33, 35, 37 Only	B30-244-595-DIAM	B-595		2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
BBP31, 33, 35, 37 Only	B30-161-595-DIAM	B-595		4.000 (101.6)	4.000 (101.6)	1	240	B30-R10000
BBP31, 33, 35, 37 Only	B30-246-595-NFR	B-595		1.125 (28.6)	3.000 (76.2)	1	300	B30-R10000
BBP31, 33, 35, 37 Only	B30-244-595-CB	B-595		2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
BBP31, 33, 35, 37 Only	B30-245-595-CB	B-595		2.250 (57.5)	4.000 (101.6)	1	240	B30-R10000
BBP31, 33, 35, 37 Only	B30-263-595-CB	B-595		4.000 (101.6)	6.250 (158.8)	1	170	B30-R10000
BBP31, 33, 35, 37 Only	B30-244-595-HMIG	B-595		2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
BBP31, 33, 35, 37 Only	B30-246-595-HMIG	B-595		1.125 (28.6)	3.000 (76.2)	1	300	B30-R10000

Benchtop Printers

Paper Labels (B-424)

- Economical choice for light duty general ID
- White finish and matte topcoat
- Excellent contrast and smear resistance for barcode printing

Service temp: -40°F to 124°F Agency approvals: **RoHS**




Figure 2



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP33 Only	Fig. 2	B33-53-424	B-424	White	2.000 (50.8)	0.500 (12.7)	-	0.600 (15.2)	2.200 (55.9)	1	2500	B30-R4300
BBP33 Only	Fig. 2	B33-17-424	B-424	White	2.000 (50.8)	1.000 (25.4)	1.125 (28.6)	2.200 (55.9)	-	1	1500	B30-R4300
BBP33 Only	Fig. 2	B33-7-424	B-424	White	2.750 (69.9)	1.250 (31.8)	-	1.375 (34.9)	2.950 (74.9)	1	1000	B30-R4300
BBP33 Only	Fig. 2	B33-18-424	B-424	White	3.000 (76.2)	1.000 (25.4)	1.125 (28.6)	3.200 (81.3)	-	1	1500	B30-R4300
BBP33 Only	Fig. 2	B33-19-424	B-424	White	3.000 (76.2)	2.000 (50.8)	2.125 (54.0)	3.200 (81.3)	-	1	500	B30-R4300
BBP33 Only	Fig. 2	B33-20-424	B-424	White	3.000 (76.2)	5.000 (127)	-	5.125 (130.2)	3.200 (81.3)	1	250	B30-R4300
BBP33 Only	Fig. 2	B33-55-424	B-424	White	4.000 (101.6)	2.000 (50.8)	-	2.125 (54.0)	4.200 (106.7)	1	750	B30-R4300
BBP33 Only	Fig. 2	B33-25-424	B-424	White	4.000 (101.6)	6.000 (152.4)	6.125 (155.6)	4.200 (106.7)	-	1	350	B30-R4300

B30 Series

B30 & B33 Series Materials


BradyID.com/s35

Polypropylene Labels (B-425)

- General labeling material for indoor use
- Outstanding chemical and solvent resistance and print performance
- Not recommended for prolonged outdoor use (use B-595 material for 8-10 year outdoor use)

Service Temp: -94°F to 212°F

Agency approvals:    

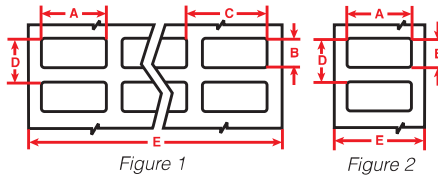

Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP33 Only	Fig. 1	B33-5-425	B-425	White	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R4300
BBP33 Only	Fig. 2	B33-17-425	B-425	White	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	1500	B30-R4300
BBP33 Only	Fig. 2	B33-18-425	B-425	White	3.000 (76.2)	1.000 (25.4)	-	1.125 (28.6)	3.200 (81.3)	1	1500	B30-R4300
BBP33 Only	Fig. 2	B33-19-425	B-425	White	3.000 (76.2)	2.000 (50.8)	-	2.125 (54.0)	3.200 (81.3)	1	500	B30-R4300

Retro Reflective Tape (B-584)

- Highly reflective material shines back brightly when struck by light
- Ideal for labeling outdoor utility pedestals, hard hats, jobsite equipment and roof-top equipment
- Recommended for low light or inclement weather conditions

Service Temp: -40°F to 158°F

Application Temp: 0°F to 158°F (yellow & orange), 50°F to 158°F (silver)

Average Outdoor Durability: 4 to 6 years




Figure 33



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-584-SL	B-584	Silver	1.125 (28.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-584-SL	B-584	Silver	2.250 (57.5)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	✂ Fig. 33	B30C-4000-584-SL	B-584	Silver	4.000 (101.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-584-YL	B-584	Yellow	1.125 (28.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-584-YL	B-584	Yellow	2.250 (57.5)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	✂ Fig. 33	B30C-4000-584-YL	B-584	Yellow	4.000 (101.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-584-OR	B-584	Orange	1.125 (28.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-584-OR	B-584	Orange	2.250 (57.5)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	✂ Fig. 33	B30C-4000-584-OR	B-584	Orange	4.000 (101.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000

BradyGlo™ High-Intensity Photoluminescent Tape (B-526)

- For glow-in-the-dark identification up to 10 hours
- Designed for directional and evacuation marking and equipment marking
- Ideal for marking emergency utility shut-offs, fire extinguishers, alarm pulls and vital equipment controls
- Complies with indoor use requirements specified in RS 6-1 and 6-1A of New York Local Law 26

Service Temp: -40°F to 140°F Application Temp: 40°F to 140°F



Figure 33



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-526	B-526	Luminous Green	1.125 (28.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-526	B-526	Luminous Green	2.250 (57.5)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	✂ Fig. 33	B30C-4000-526	B-526	Luminous Green	4.000 (101.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000

B30 & B33 Series Materials

BradyID.com/s35

ToughStripe® Printable Floor Marking Tape (B-483 with overlamine)

- Revolutionary B-483 material has ultra aggressive adhesive
- Withstands forklift and pallet jack traffic without tearing or lifting
- Easy 3-step process: print label, position on floor, apply overlamine
- Each roll ships with a roll of clear overlamine which must be applied over printed label and onto appropriate surface for best performance



Service Temp: -40°F to 248°F
Agency Approvals:  



Figure 33



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP35, 37 Only	Fig. 33	B30C-1125-483WT-KT	B-483	White	1.125 (28.6)	100ft. (30.5m)	1 Roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 33	B30C-2250-483WT-KT	B-483	White	2.250 (57.5)	100ft. (30.5m)	1 Roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 33	B30C-3000-483WT-KT	B-483	White	3.000 (76.2)	100ft. (30.5m)	1 Roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 33	B30C-4000-483WT-KT	B-483	White	4.000 (101.6)	100ft. (30.5m)	1 Roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 33	B30C-1125-483YL-KT	B-483	Yellow	1.125 (28.6)	100ft. (30.5m)	1 Roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 33	B30C-2250-483YL-KT	B-483	Yellow	2.250 (57.5)	100ft. (30.5m)	1 Roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 33	B30C-3000-483YL-KT	B-483	Yellow	3.000 (76.2)	100ft. (30.5m)	1 Roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 33	B30C-4000-483YL-KT	B-483	Yellow	4.000 (101.6)	100ft. (30.5m)	1 Roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 33	B30C-1125-483RD-KT	B-483	Red	1.125 (28.6)	100ft. (30.5m)	1 Roll (cont.)	B30-R4400-WT
BBP35, 37 Only	Fig. 33	B30C-2250-483RD-KT	B-483	Red	2.250 (57.5)	100ft. (30.5m)	1 Roll (cont.)	B30-R4400-WT
BBP35, 37 Only	Fig. 33	B30C-3000-483RD-KT	B-483	Red	3.000 (76.2)	100ft. (30.5m)	1 Roll (cont.)	B30-R4400-WT
BBP35, 37 Only	Fig. 33	B30C-4000-483RD-KT	B-483	Red	4.000 (101.6)	100ft. (30.5m)	1 Roll (cont.)	B30-R4400-WT
BBP35, 37 Only	Fig. 33	B30C-1125-483BL-KT	B-483	Blue	1.125 (28.6)	100ft. (30.5m)	1 Roll (cont.)	B30-R4400-WT
BBP35, 37 Only	Fig. 33	B30C-2250-483BL-KT	B-483	Blue	2.250 (57.5)	100ft. (30.5m)	1 Roll (cont.)	B30-R4400-WT
BBP35, 37 Only	Fig. 33	B30C-3000-483BL-KT	B-483	Blue	3.000 (76.2)	100ft. (30.5m)	1 Roll (cont.)	B30-R4400-WT
BBP35, 37 Only	Fig. 33	B30C-4000-483BL-KT	B-483	Blue	4.000 (101.6)	100ft. (30.5m)	1 Roll (cont.)	B30-R4400-WT
BBP35, 37 Only	Fig. 33	B30C-1125-483GN-KT	B-483	Green	1.125 (28.6)	100ft. (30.5m)	1 Roll (cont.)	B30-R4400-WT
BBP35, 37 Only	Fig. 33	B30C-2250-483GN-KT	B-483	Green	2.250 (57.5)	100ft. (30.5m)	1 Roll (cont.)	B30-R4400-WT
BBP35, 37 Only	Fig. 33	B30C-3000-483GN-KT	B-483	Green	3.000 (76.2)	100ft. (30.5m)	1 Roll (cont.)	B30-R4400-WT
BBP35, 37 Only	Fig. 33	B30C-4000-483GN-KT	B-483	Green	4.000 (101.6)	100ft. (30.5m)	1 Roll (cont.)	B30-R4400-WT
BBP35, 37 Only	Fig. 33	B30C-1125-483BK-KT	B-483	Black	1.125 (28.6)	100ft. (30.5m)	1 Roll (cont.)	B30-R4400-WT
BBP35, 37 Only	Fig. 33	B30C-2250-483BK-KT	B-483	Black	2.250 (57.5)	100ft. (30.5m)	1 Roll (cont.)	B30-R4400-WT
BBP35, 37 Only	Fig. 33	B30C-3000-483BK-KT	B-483	Black	3.000 (76.2)	100ft. (30.5m)	1 Roll (cont.)	B30-R4400-WT
BBP35, 37 Only	Fig. 33	B30C-4000-483BK-KT	B-483	Black	4.000 (101.6)	100ft. (30.5m)	1 Roll (cont.)	B30-R4400-WT
BBP35, 37 Only	Fig. 33	B30C-1125-483OR-KT	B-483	Orange	1.125 (28.6)	100ft. (30.5m)	1 Roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 33	B30C-2250-483OR-KT	B-483	Orange	2.250 (57.5)	100ft. (30.5m)	1 Roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 33	B30C-3000-483OR-KT	B-483	Orange	3.000 (76.2)	100ft. (30.5m)	1 Roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 33	B30C-4000-483OR-KT	B-483	Orange	4.000 (101.6)	100ft. (30.5m)	1 Roll (cont.)	B30-R6000

Benchtop Printers

B30 Series

ToughStripe® Floor Marking Tape

ToughStripe products are ideal for marking aisles, passageways and storage locations, and pointing out important safety equipment and egress paths through your facility.

ToughStripe material is also available as:

- Solid, Striped and Dashed Tapes
- Die-cut Shapes
- Numbers & Letters

View page 289 for more ToughStripe products.



B30 & B33 Series Materials

BradyID.com/s35

Printable Magnetic Supply (B-509)

- Easiest and quickest material for removing and repositioning
- Non-adhesive magnetic material that can be printed on directly
- Ideal for reusable, repositionable, and lean / 5S identification applications

Service Temp: 0°F to 158°F

Average Outdoor Durability: 3 to 5 years



Figure 33b



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP30, 31, 33, 35, 37	Fig. 33b	B30C-2500-509-WT	B-509	White	2.500 (63.5)	25ft (7.62m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33b	B30C-4250-509-WT	B-509	White	4.250 (107.8)	25ft (7.62m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33b	B30C-2500-509-YL	B-509	Yellow	2.500 (63.5)	25ft (7.62m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33b	B30C-4250-509-YL	B-509	Yellow	4.250 (107.8)	25ft (7.62m)	1 roll (cont.)	B30-R10000

Repositionable Vinyl (B-581)

- Aggressive adhesive stays in place but removes cleanly without leaving adhesive residue
- Ideal for temporary, removable and repositionable labels, such as 5S and lean inventory labels

Service temp: -40°F to 180°F Application temp: 50°F to 180°F
Average Outdoor Durability: 5 years



Figure 33



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-581-WT	B-581	White	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-581-WT	B-581	White	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-581-WT	B-581	White	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-581-WT	B-581	White	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-500-581-YL	B-581	Yellow	0.500 (12.7)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-581-YL	B-581	Yellow	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-581-YL	B-581	Yellow	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-581-YL	B-581	Yellow	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000

Cold Temperature Application Material (B-549)

- Special adhesive permanently adheres to extremely cold surfaces
- Can be applied in -10°F and lasts in -40°F
- Ideal for cold storage warehouses, coolers, freezers and short-term winter outdoor use

Service Temp: -40°F to 212°F Application Temp: -10°F to 212°F
Average Outdoor Durability: Up to 1 year



Figure 33



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-549-WT	B-549	White	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-549-WT	B-549	White	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-549-WT	B-549	White	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-549-YL	B-549	Yellow	1.125 (28.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-549-YL	B-549	Yellow	2.250 (57.5)	100ft. (30.5m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-549-YL	B-549	Yellow	4.000 (101.6)	100ft. (30.5m)	1 roll (cont.)	B30-R10000



B30 & B33 Series Materials

BradyID.com/s35

ToughWash® Washdown Resistant Labels (B-854, B-855)

- Withstands high pressure, heat, harsh chemicals and numerous washdown cycles
- B-854 offers metal detectable layer to detect foreign debris in food stream
- Legible and long-lasting for even the toughest washdown cycles
- Ideal for use in the food & beverage industry

Service Temp: -40°F to 230°F
Agency approvals: RoHS





Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Length B Inch (mm)	Labels Per Roll	Rec. Ribbon
B-854 ToughWash™ Metal Detectable Material								
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-854-YL	B-854		4.000 (101.06)	50ft. (15.2 m)	1 roll (cont.)	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-854-WT	B-854		4.000 (101.06)	50ft. (15.2 m)	1 roll (cont.)	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 73	B30-25-854-OSHADA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 73	B30-25-854-ANSIWA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 73	B30-25-854-ANSIDA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 73	B30-25-854-ANSICA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 73	B30-25-854-PEL	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 73	B30-25-854-PREC	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
B-855 ToughWash™ Material								
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-855-YL	B-855		1.125 (28.6)	50ft. (15.2 m)	1 roll (cont.)	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-855-YL	B-855		2.250 (57.5)	50ft. (15.2 m)	1 roll (cont.)	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-855-YL	B-855		4.000 (101.06)	50ft. (15.2 m)	1 roll (cont.)	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-855-WT	B-855		1.125 (28.6)	50ft. (15.2 m)	1 roll (cont.)	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-855-WT	B-855		2.250 (57.5)	50ft. (15.2 m)	1 roll (cont.)	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-855-WT	B-855		4.000 (101.06)	50ft. (15.2 m)	1 roll (cont.)	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 73	B30-25-855-OSHADA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 73	B30-25-855-ANSIWA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 73	B30-25-855-ANSIDA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 73	B30-25-855-ANSICA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 73	B30-25-855-PEL	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 73	B30-25-855-PREC	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000

Benchtop Printers

B30 Series

▶ Pro-Labeling Techniques:



Circle Gauge Labels with the BBP®37 Printer

The BBP®37 printer's XY cutter and built-in Circle Gauge App make it easy to create gauge labels. The app allows you to create in-zone, out-of-zone, caution zone(s) or all three and to specify center hole size for accurate label placement and gauge visibility.

- **With BBP37:** Use multi-color ribbons, 4" white continuous tape and the XY cutter on the BBP37 printer to print and cut out a circular label for your gauge. Transparent transfer tape then makes it easy to cleanly apply the label in the proper position on your gauge.

Suggested Supplies for Circle Gauge Labels

Fits Printer Model(s)	Catalog #	Color	Size
BBP37*	B30C-4000-595-WT	White Label	4.0" x 100 ft.
BBP37**	B30-R10000-GR-8	Green, Red Ribbon	
BBP37**	B30-R10000-KRYG-8	Black, Red, Yellow & Green Ribbon	
BBP37**	B30-R10000-KRGB-8	Black, Red, Blue & Green Ribbon	
-	76737	Transfer Tape	4.25" x 300 ft

** Fits BBP37 for this application, also fits BBP30, 31, 33, 35 for other applications. Cutting circular shape enabled on BBP37 model only.

** Ribbon fits BBP37 for this application, also fits BBP35 for other applications.



Gradient "Ruler" Labels with BBP®35 or BBP®37 Printers

Create accurate scale or "ruler" labels using the built-in Gradient Label App on the printer with continuous tapes. The app allows you to specify units in inches or millimeters, and choose from several interval tick mark options.

The use of multi-color ribbons allow you to include multiple colors on your label for multiple "zones".

For scales longer than 7 feet (i.e. large tanks) combine multiple strips and set start point on second label to start where first label left off.

- **With BBP35, 37:** Use any continuous tape along with the built-in Gradient Label App on the BBP35 and BBP37 printers.

Suggested Supplies for Gradient Ruler Labels

Fits Printer Model(s)	Catalog #	Color	Size
BBP37, 35*	B30C-4000-595-WT	White	4.0" x 100 ft.
BBP37, 35*	B30C-2250-595-WT	White	2.25" x 100 ft.
BBP37, 35*	B30C-1125-595-WT	White	1.125" x 100 ft.
BBP37, 35*	B30C-500-595-WT	White	0.50" x 100 ft.
BBP37, 35*	B30C-4000-595-YL	Yellow	4.0" x 100 ft.
BBP37, 35*	B30C-2250-595-YL	Yellow	2.25" x 100 ft.
BBP37, 35*	B30C-1125-595-YL	Yellow	1.125" x 100 ft.
BBP37, 35*	B30C-500-595-YL	Yellow	0.50" x 100 ft.
BBP37, 35*	B30-R10000	Black Ribbon	
BBP37, 35*	B30-R10000-RD	Red Ribbon	
BBP37, 35	B30-R10000-KR-8	Black, Red Ribbon	
BBP37, 35	B30-R10000-KRGB-8	Black, Red, Green & Blue Ribbon	
BBP37, 35	B30-R10000-KRYG-8	Black, Red, Yellow & Green Ribbon	

* Fits BBP35, 37 for this application, also fits BBP30, 31, 33 for other applications. White and Yellow tape offer the highest visual contrast for rulers, other colors may also be used if desired.


B30 & B33 Series Materials

BradyID.com/s35

General ID Labels for Lean 5S, Bins and Production Areas (B-483, B-484, B-498, B-499, B-593, B-595)

- Various sizes in several durable material types
- Also ideal for marking backer board, DIN rail, relays, PLCs, switches, solenoids, drive motors and other components inside panels
- All recommended materials are flexible and have high-tack adhesives for adhesion to wide variety of surfaces and components

B-483: Service temp: -40°F to 248°F Agency approvals:
B-484: Service temp: -40°F to 240°F Agency approvals:
B-498: Service temp: -40°F to 175°F Agency approvals:
B-499: Service temp: -40°F to 193°F Agency approvals:
B-595: Service temp: -40°F to 180°F, 8-10 years average outdoor durability Agency approvals:

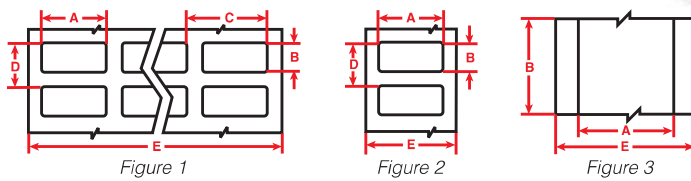

Benchtop Printers

B30 Series

Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Vinyl Cloth - Aggressive but repositionable adhesive (B-498):												
BBP33 Only	Fig. 1	B33-90-498	B-498	White	0.250 (6.4)	1.437 (36.5)	0.350 (8.9)	1.562 (39.7)	2.200 (55.9)	6	2500	B30-R6200
BBP33 Only	Fig. 1	B33-68-498	B-498	White	0.500 (12.7)	0.750 (19.1)	0.600 (15.2)	0.875 (22.2)	2.500 (63.5)	4	5000	B30-R6200
BBP33 Only	Fig. 1	B33-87-498	B-498	White	0.500 (12.7)	1.437 (36.5)	0.600 (15.2)	1.562 (39.7)	3.700 (94.0)	6	2500	B30-R6200
BBP33 Only	Fig. 1	B33-1-498	B-498	White	0.750 (19.1)	0.250 (6.4)	0.800 (20.3)	0.350 (8.9)	3.350 (85.1)	4	5000	B30-R6200
BBP33 Only	Fig. 1	B33-95-498	B-498	White	0.800 (20.3)	1.437 (36.5)	0.900 (22.9)	1.562 (39.7)	2.800 (71.1)	3	2300	B30-R6200
BBP33 Only	Fig. 1	B33-5-498	B-498	White	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R6200
BBP33 Only	Fig. 1	B33-88-498	B-498	White	1.000 (25.4)	0.750 (19.1)	1.100 (27.9)	0.875 (22.2)	2.300 (58.4)	2	2500	B30-R6200
BBP33 Only	Fig. 1	B33-89-498	B-498	White	1.000 (25.4)	1.437 (36.5)	1.100 (27.9)	1.562 (39.7)	3.400 (86.4)	3	2300	B30-R6200
Nylon Cloth - Permanent adhesive (B-499):												
BBP33 Only	Fig. 1	B33-68-499	B-499	White	0.500 (12.7)	0.750 (19.1)	0.600 (15.2)	0.875 (22.2)	2.500 (63.5)	4	1500	B30-R6000
BBP33 Only	Fig. 1	B33-165-499	B-499	White	0.800 (20.3)	1.437 (36.5)	0.900 (22.9)	1.562 (39.7)	3.700 (94.0)	4	2500	B30-R6000
BBP33 Only	Fig. 2	B33-125-499	B-499	White	0.900 (22.9)	0.500 (12.7)	-	-	-	1	1500	B30-R6000
BBP33 Only	Fig. 1	B33-126-499	B-499	White	0.900 (22.9)	0.500 (12.7)	-	-	-	2	1500	B30-R6000
BBP33 Only	Fig. 2	B33-163-499	B-499	White	1.000 (25.4)	0.375 (9.5)	-	-	-	1	1500	B30-R6000
BBP33 Only	Fig. 1	B33-152-499	B-499	White	1.000 (25.4)	0.375 (9.5)	-	-	-	2	1500	B30-R6000
BBP33 Only	Fig. 2	B33-136-499	B-499	White	1.500 (38.1)	0.750 (19.1)	-	0.875 (22.2)	1.770 (45.0)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-137-499	B-499	White	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	1100	B30-R6000
BBP33 Only	Fig. 2	B33-125-499	B-499	White	2.000 (50.8)	0.250 (6.4)	-	-	-	1	1500	B30-R6000
Polyester - Ultra aggressive adhesive for highly textured and low surface energy surfaces (B-483):												
BBP33 Only	Fig. 1	B33-149-483	B-483	White	0.500 (12.7)	0.500 (12.7)	0.600 (15.2)	0.600 (15.2)	2.500 (63.5)	4	5000	B30-R6000
BBP33 Only	Fig. 1	B33-5-483	B-483	White	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R6000
BBP33 Only	Fig. 2	B33-17-483	B-483	White	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-7-483	B-483	White	2.750 (69.9)	1.250 (31.8)	-	1.375 (34.9)	2.950 (74.9)	1	1000	B30-R6000
BBP33 Only	Fig. 2	B33-18-483	B-483	White	3.000 (76.2)	1.000 (25.4)	-	1.125 (28.6)	3.200 (81.3)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-19-483	B-483	White	3.000 (76.2)	2.000 (50.8)	-	2.125 (54.0)	3.200 (81.3)	1	500	B30-R6000
BBP33 Only	Fig. 2	B33-55-483	B-483	White	4.000 (101.6)	2.000 (50.8)	-	2.125 (54.0)	4.200 (106.7)	1	750	B30-R6000
Polyester - Ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484):												
BBP33 Only	Fig. 2	B33-125-484	B-484	White	0.900 (22.9)	0.500 (12.7)	-	0.600 (15.2)	1.100 (27.9)	1	1500	B30-R6000
BBP33 Only	Fig. 1	B33-5-484	B-484	White	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R6000
BBP33 Only	Fig. 2	B33-136-484	B-484	White	1.500 (38.1)	0.750 (19.1)	-	0.875 (22.2)	1.700 (43.2)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-17-484	B-484	White	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-18-484	B-484	White	3.000 (76.2)	1.000 (25.4)	-	1.125 (28.6)	3.200 (81.3)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-19-484	B-484	White	3.000 (76.2)	2.000 (50.8)	-	2.125 (54.0)	3.200 (81.3)	1	500	B30-R6000
Continuous cut-to-length vinyl - Permanent adhesive, conformable; indoor/outdoor grade (B-595*):												
BBP30, 31, 33, 35, 37	Fig. 3	B30C-500-595-WT	B-595	White	0.500 (12.7)	100 ft. (30.5m)	-	-	0.700 (17.8)	1 roll (cont.)		B30-R10000
BBP30, 31, 33, 35, 37	Fig. 3	B30C-1125-595-WT	B-595	White	1.125 (28.6)	100 ft. (30.5m)	-	-	1.375 (34.9)	1 roll (cont.)		B30-R10000
BBP30, 31, 33, 35, 37	Fig. 3	B30C-500-595-YL	B-595	Yellow	0.500 (12.7)	100 ft. (30.5m)	-	-	0.700 (17.8)	1 roll (cont.)		B30-R10000
BBP30, 31, 33, 35, 37	Fig. 3	B30C-1125-595-YL	B-595	Yellow	1.125 (28.6)	100 ft. (30.5m)	-	-	1.375 (34.9)	1 roll (cont.)		B30-R10000

* 46 additional sizes and colors available for B-595 (page 392).

Pro-Labeling Techniques:



BLS1255 Cold Press Laminator

Blank Rigid Panels

- Create rigid labels and signs using adhesive output from your printer and blank rigid panel
- Ideal for surfaces where applying an adhesive label is difficult
- Panels are sized slightly larger than label output to facilitate centered and accurate placement of label on panel
- Labels can be hand-applied to panel or applied using a BLS1255 cold press laminator
- Panels are pre-drilled with corner holes for mounting with screws or cable-ties. Alternatively signs can be mounted using foam tape or magnetic strips

Laminator & Mounting Accessories

Catalog #	Material	Height Inch (mm)	Length Inch (mm)	Qty
105038	BLS1255 Laminator can laminate up to 12" wide			1
78272	Adhesive Mounting Tape (Double Sided)	0.500 (12.7)	108 ft. (32.9m)	1 roll
78273	Adhesive Mounting Tape (Double Sided)	0.750 (19.1)	108 ft. (32.9m)	1 roll
97200	Adhesive Mounting Strips (Double Sided)	0.750 (19.1)	4,500 (114.3)	4 pcs
58301	Magnetic Strips (One Side Adhesive)	1,000 (25.4)	4,000 (101.6)	10 pcs

Aluminum Panels (rounded corners/hole punched)

Catalog #	Material	Color	Sign Height	Sign Length	Qty
146083	Aluminum	White	2.5"	6.26"	10
146113	Aluminum	White	2.5"	10.25"	10
13629	Aluminum	White	4.25"	6.25"	10
106461	Aluminum	White	4.25"	10.25"	10
146082	Aluminum	White	4.25"	14.25"	10
13632	Aluminum	White	7.25"	10.25"	10
106460	Aluminum	White	7.63"	10.38"	10
106462	Aluminum	White	10.25"	10.25"	10
13635	Aluminum	White	10.25"	14.25"	10
146116	Aluminum	Yellow	2.5"	6.26"	10
146117	Aluminum	Yellow	2.5"	10.25"	10
13630	Aluminum	Yellow	4.25"	6.25"	10
146114	Aluminum	Yellow	4.25"	10.25"	10
146115	Aluminum	Yellow	4.25"	14.25"	10
13633	Aluminum	Yellow	7.625"	10.375"	10
13636	Aluminum	Yellow	10.25"	14.25"	10
13631	Aluminum	Orange	4.25"	6.25"	10
13634	Aluminum	Orange	7.625"	10.375"	10
13637	Aluminum	Orange	10.25"	14.25"	10

Plastic Panels (rounded corners/hole punched)

Catalog #	Material	Color	Sign Height	Sign Length	Qty
146076	Plastic	White	2.5"	6.25"	10
146077	Plastic	White	2.5"	10.25"	10
13620	Plastic	White	4.25"	6.25"	10
146074	Plastic	White	4.25"	10.25"	10
146075	Plastic	White	4.25"	14.25"	10
13623	Plastic	White	7.63"	10.38"	10
146080	Plastic	Yellow	2.5"	6.25"	10
146081	Plastic	Yellow	2.5"	10.25"	10
13620	Plastic	Yellow	4.25"	6.25"	10
146078	Plastic	Yellow	4.25"	10.25"	10
146079	Plastic	Yellow	4.25"	14.25"	10
13622	Plastic	Orange	4.25"	6.25"	10
13625	Plastic	Orange	7.63"	10.38"	10
13628	Plastic	Orange	10.25"	14.25"	10

Creating a Rigid Sign



1. Choose your rigid panel, select the needed material size and print your adhesive label



2. Peel away the first 1.5" of liner from the label. Apply to rigid panel, aligning edge of label with edge of panel



3. Insert panel and rotate handle until 1" of panel is "pinched." Then grasp liner and pull it away as you rotate the handle to move the panel through



4. In less than 30 seconds you have a rigid sign ready to hang





B30 & B33 Series Materials

BradyID.com/s35

Self-Laminating Wire & Cable Labels (B-427)

- Brady's most popular wire marker!
- Features white printable area with clear "tail" that wraps around marker to protect text
- Superior resistance to abrasion, handling, solvents, water, oil and dirt
- Vinyl with permanent acrylic adhesive designed specifically for tightly curved surfaces

Service temp: -40°F to 158°F
Agency Approvals:




Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Print Area Height F Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP33 Only	Fig. 12	B33-80-427	B-427	White	0.500 (12.7)	0.750 (19.1)	0.600 (15.2)	0.950 (24.1)	2.500 (63.5)	0.375 (9.5)	4	2500	B30-R4300
BBP33 Only	Fig. 12	B33-113-427	B-427	White	0.500 (12.7)	1.000 (25.4)	0.600 (15.2)	0.950 (24.1)	2.500 (63.5)	0.375 (9.5)	4	2500	B30-R4300
BBP33 Only	Fig. 12	B33-8-427	B-427	White	0.500 (12.7)	1.437 (36.5)	0.662 (16.8)	1.625 (41.3)	3.350 (85.1)	0.500 (12.7)	5	5000	B30-R4300
BBP33 Only	Fig. 12	B33-56-427	B-427	White	0.750 (19.1)	0.937 (23.8)	0.800 (20.3)	1.125 (28.6)	3.350 (85.1)	0.375 (9.5)	4	5000	B30-R4300
BBP33 Only	Fig. 12	B33-73-427	B-427	White	0.750 (19.1)	1.750 (44.6)	0.800 (20.3)	1.875 (47.6)	3.350 (85.1)	0.500 (12.7)	4	3500	B30-R4300
BBP33 Only	Fig. 12	B33-74-427	B-427	White	0.800 (20.3)	1.437 (36.5)	0.800 (20.3)	1.625 (41.3)	3.400 (86.4)	0.500 (12.7)	4	4000	B30-R4300
BBP33 Only	Fig. 12	B33-115-427	B-427	White	1.000 (25.4)	0.750 (19.1)	1.100 (27.9)	0.875 (22.2)	2.300 (58.4)	0.375 (9.5)	2	2500	B30-R4300
BBP33 Only	Fig. 12	B33-116-427	B-427	White	1.000 (25.4)	1.000 (25.4)	1.100 (27.9)	1.125 (28.6)	2.300 (58.4)	0.375 (9.5)	2	2500	B30-R4300
BBP33 Only	Fig. 12	B33-9-427	B-427	White	1.000 (25.4)	1.437 (36.5)	1.075 (27.3)	1.625 (41.3)	3.350 (85.1)	0.500 (12.7)	3	2500	B30-R4300
BBP33 Only	Fig. 12	B33-75-427	B-427	White	1.000 (25.4)	2.250 (57.2)	1.100 (27.9)	2.375 (60.3)	2.300 (58.4)	0.750 (19.1)	2	1400	B30-R4300
BBP33 Only	Fig. 15	B33-131-427	B-427	White	1.000 (25.4)	2.625 (66.7)	-	1.125 (28.6)	2.825 (71.8)	1.000 (25.4)	1	1500	B30-R4300
BBP33 Only	Fig. 12	B33-10-427	B-427	White	1.000 (25.4)	3.750 (95.3)	1.075 (27.3)	4.000 (101.6)	3.350 (85.1)	1.000 (25.4)	3	1200	B30-R4300
BBP33 Only	Fig. 12	B33-81-427	B-427	White	1.000 (25.4)	6.000 (152.4)	1.100 (27.9)	6.187 (157.1)	2.300 (58.4)	1.500 (38.1)	2	500	B30-R4300
BBP33 Only	Fig. 9a	B33-135-427AW	B-427	White	1.500 (38.1)	0.750 (19.1)	-	0.875 (22.2)	1.700 (43.2)	-	1	1500	B30-R4300
BBP33 Only	Fig. 14	B33-118-427	B-427	White	1.500 (38.1)	1.000 (25.4)	-	1.125 (28.6)	1.700 (43.2)	0.375 (9.5)	1	1250	B30-R4300
BBP33 Only	Fig. 14	B33-119-427	B-427	White	1.500 (38.1)	1.500 (38.1)	-	1.750 (44.5)	1.700 (43.2)	0.500 (12.7)	1	1000	B30-R4300
BBP33 Only	Fig. 14	B33-272-427	B-427	White	1.500 (38.1)	2.250 (57.2)	-	2.500 (63.5)	1.700 (43.2)	0.750 (19.1)	1	700	B30-R4300
BBP33 Only	Fig. 14	B33-120-427	B-427	White	1.750 (44.5)	1.000 (25.4)	-	1.125 (28.6)	1.950 (49.5)	0.375 (9.5)	1	1250	B30-R4300
BBP33 Only	Fig. 14	B33-121-427	B-427	White	1.750 (44.5)	1.500 (38.1)	-	1.750 (44.5)	1.950 (49.5)	0.500 (12.7)	1	1000	B30-R4300
BBP33 Only	Fig. 14	B33-273-427	B-427	White	1.750 (44.5)	2.250 (57.2)	-	2.500 (63.5)	1.950 (49.5)	0.750 (19.1)	1	500	B30-R4300
BBP33 Only	Fig. 9a	B33-137-427AW	B-427	White	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	-	1	1500	B30-R4300
BBP33 Only	Fig. 14	B33-27-427	B-427	White	2.000 (50.8)	3.750 (95.3)	-	4.000 (101.6)	2.200 (55.9)	1.000 (25.4)	1	400	B30-R4300
BBP33 Only	Fig. 14	B33-26-427	B-427	White	2.500 (63.5)	2.250 (57.2)	-	2.438 (61.9)	2.700 (68.8)	0.750 (19.1)	1	500	B30-R4300
BBP33 Only	Fig. 14	B33-82-427	B-427	White	2.000 (50.8)	6.000 (152.4)	-	6.187 (157.1)	2.200 (55.9)	1.500 (38.1)	1	200	B30-R4300

Benchtop Printers

Patch Panel Adhesive Strips (B-422)

- Continuous supply in 3 widths to make labeling patch panels and other datacomm components quick and easy
- Aggressive adhesive suitable for rough, highly textured and powder-coated surfaces as well as smooth surfaces

Service temp: -40°F to 212°F
Agency Approvals:



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Web Width E Inch (mm)	Labels Per Roll	Rec. Ribbon
BBP33 Only	Fig. 3	B33C-312-422	B-422	White	0.312 (7.9)	85ft (25.9m)	1.000 (25.4)	1 roll (cont.)	B30-R6000
BBP33 Only	Fig. 3	B33C-375-422	B-422	White	0.375 (9.5)	85ft (25.9m)	1.000 (25.4)	1 roll (cont.)	B30-R6000

B30 Series

B30 & B33 Series Materials

BradyID.com/s35

Vinyl Cloth Adhesive Wire & Cable Labels (B-498)

- A vinyl cloth label for marking wires, cables and inside-panel components
- Repositionable! A highly unique adhesive and cloth construction gives excellent holding power and still allows for clean removal and reapplication
- Ideal choice for marking both ends of a wire that you may need to cut shorter before final termination

Service temp: -40°F to 175°F
Agency Approvals:





Figure 1

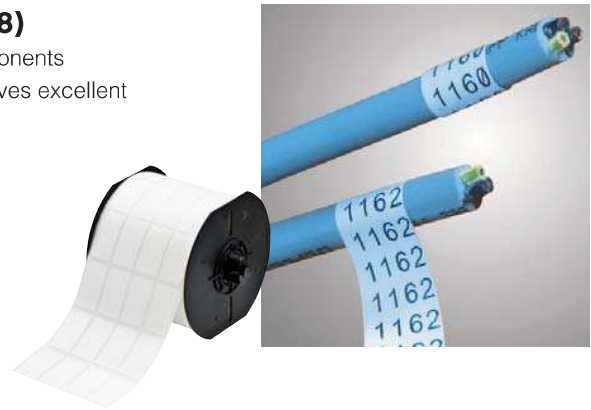

Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP33 Only	Fig. 1	B33-90-498	B-498	White	0.250 (6.4)	1.437 (36.5)	0.350 (8.9)	1.562 (39.7)	2.200 (55.9)	6	2500	B30-R6200
BBP33 Only	Fig. 1	B33-68-498	B-498	White	0.500 (12.7)	0.750 (19.1)	0.600 (15.2)	0.875 (22.2)	2.500 (63.5)	4	5000	B30-R6200
BBP33 Only	Fig. 1	B33-87-498	B-498	White	0.500 (12.7)	1.437 (36.5)	0.600 (15.2)	1.562 (39.7)	3.700 (94)	6	2500	B30-R6200
BBP33 Only	Fig. 1	B33-1-498	B-498	White	0.750 (19.1)	0.250 (6.4)	0.800 (20.3)	0.350 (8.9)	3.350 (85.1)	4	5000	B30-R6200
BBP33 Only	Fig. 1	B33-91-498	B-498	White	0.750 (19.1)	0.937 (23.8)	0.850 (21.6)	1.062 (27.0)	3.500 (88.9)	4	2500	B30-R6200
BBP33 Only	Fig. 1	B33-95-498	B-498	White	0.800 (20.3)	1.437 (36.5)	0.900 (22.9)	1.562 (39.7)	2.800 (71.1)	3	2300	B30-R6200
BBP33 Only	Fig. 1	B33-5-498	B-498	White	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R6200
BBP33 Only	Fig. 1	B33-88-498	B-498	White	1.000 (25.4)	0.750 (19.1)	1.100 (27.9)	0.875 (22.2)	2.300 (58.4)	2	2500	B30-R6200
BBP33 Only	Fig. 1	B33-89-498	B-498	White	1.000 (25.4)	1.437 (36.5)	1.100 (27.9)	1.562 (39.7)	3.400 (86.4)	3	2300	B30-R6200

Terminal Block Adhesive Strips (B-498)

- Specially designed narrow-width continuous label for alignment on terminal blocks and patch panels
- Highly unique adhesive and vinyl cloth construction gives excellent holding power and still allows for clean removal and reapplication

Service temp: -40°F to 175°F
Agency Approvals:




Figure 3



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Web Width E Inch (mm)	Labels Per Roll	Rec. Ribbon
BBP33 Only	Fig. 3	B33C-312-498	B-498	White	0.312 (7.9)	85 ft. (25.9m)	1.000 (25.4)	1 roll (cont.)	B30-R6200
BBP33 Only	Fig. 3	B33C-375-498	B-498	White	0.375 (9.5)	85 ft. (25.9m)	1.000 (25.4)	1 roll (cont.)	B30-R6200

B30 & B33 Series Materials

BradyID.com/s35

Tedlar® Adhesive Wire & Cable Labels (B-437)

- Topcoated Polyvinylflouride label for wire & cable marking where high temperature and self-extinguishing features are required
- Heavy duty performance with excellent resistance to water, oil and other fluids
- Meets MIL-M-87958 Standard

Service temp: -94°F to 275°F
Agency Approvals: **Rolls**




Figure 1




Figure 3




Figure 4



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP33 Only	Fig. 4	B33-11-437	B-437	White	0.250 (6.4)	0.250 (6.4)	0.250 (6.4)	0.375 (9.5)	3.200 (81.3)	12	15000	B30-R4300
BBP33 Only	Fig. 1	B33-1-437	B-437	White	0.750 (19.1)	0.250 (6.4)	0.800 (20.3)	0.350 (8.9)	3.350 (85.1)	4	5000	B30-R4300
BBP33 Only	Fig. 1	B33-2-437	B-437	White	0.900 (22.9)	0.250 (6.4)	1.125 (28.6)	0.350 (8.9)	3.350 (85.1)	3	5000	B30-R4300
BBP33 Only	Fig. 1	B33-5-437	B-437	White	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R4300
BBP33 Only	Fig. 1	B33-29-437	B-437	White	1.250 (31.8)	0.375 (9.5)	1.300 (33.0)	0.475 (12.1)	2.750 (69.9)	2	5000	B30-R4300
BBP33 Only	Fig. 1	B33-5-437YL	B-437	Yellow	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R4300
BBP33 Only	Fig. 1	B33-29-437YL	B-437	Yellow	1.250 (31.8)	0.375 (9.5)	1.300 (33.0)	0.475 (12.1)	2.750 (69.9)	2	5000	B30-R4300
Continuous Rolls												
BBP33 Only	Fig. 3	B33C-1000-437	B-437	White	1.000 (25.4)	85ft. (25.9m)	-	-	1.200 (30.5)	1 roll (cont.)		B30-R4300
BBP33 Only	Fig. 3	B33C-1500-437	B-437	White	1.500 (38.1)	85ft. (25.9m)	-	-	1.900 (48.3)	1 roll (cont.)		B30-R4300
BBP33 Only	Fig. 3	B33C-2000-437	B-437	White	2.000 (50.8)	85ft. (25.9m)	-	-	2.200 (55.9)	1 roll (cont.)		B30-R4300
BBP33 Only	Fig. 3	B33C-3000-437	B-437	White	3.000 (76.2)	85ft. (25.9m)	-	-	3.400 (86.4)	1 roll (cont.)		B30-R4300
BBP33 Only	Fig. 3	B33C-1000-437YL	B-437	Yellow	1.000 (25.4)	85ft. (25.9m)	-	-	1.200 (30.5)	1 roll (cont.)		B30-R4300
BBP33 Only	Fig. 3	B33C-1500-437YL	B-437	Yellow	1.500 (38.1)	85ft. (25.9m)	-	-	1.900 (48.3)	1 roll (cont.)		B30-R4300
BBP33 Only	Fig. 3	B33C-2000-437YL	B-437	Yellow	2.000 (50.8)	85ft. (25.9m)	-	-	2.200 (55.9)	1 roll (cont.)		B30-R4300
BBP33 Only	Fig. 3	B33C-3000-437YL	B-437	Yellow	3.000 (76.2)	85ft. (25.9m)	-	-	3.400 (86.4)	1 roll (cont.)		B30-R4300

Polyimide High Temp Adhesive Wire & Cable Labels (B-472)

- Topcoated Polyimide label for wire & cable marking where high temperature and self-extinguishing features are required
- Heavy duty performance with excellent resistance to water, oil and other fluids

Service temp: -94°F to 320°F
Agency Approvals: **Rolls**




Figure 1




Figure 3




Figure 4



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP33 Only	Fig. 4	B33-11-472	B-472	White	0.250 (6.4)	0.250 (6.4)	0.250 (6.4)	0.375 (9.5)	3.200 (81.3)	12	15000	B30-R4300
BBP33 Only	Fig. 1	B33-1-472	B-472	White	0.750 (19.1)	0.250 (6.4)	0.800 (20.3)	0.350 (8.9)	3.350 (85.1)	4	5000	B30-R4300
BBP33 Only	Fig. 1	B33-2-472	B-472	White	0.900 (22.9)	0.250 (6.4)	1.125 (28.6)	0.350 (8.9)	3.350 (85.1)	3	5000	B30-R4300
BBP33 Only	Fig. 1	B33-5-472	B-472	White	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R4300
BBP33 Only	Fig. 1	B33-29-472	B-472	White	1.250 (31.8)	0.375 (9.5)	1.300 (33.0)	0.475 (12.1)	2.750 (69.9)	2	5000	B30-R4300
BBP33 Only	Fig. 1	B33-5-472YL	B-472	Yellow	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R4300
BBP33 Only	Fig. 1	B33-29-472YL	B-472	Yellow	1.250 (31.8)	0.375 (9.5)	1.300 (33.0)	0.475 (12.1)	2.750 (69.9)	2	5000	B30-R4300
Continuous Rolls												
BBP33 Only	Fig. 3	B33C-1000-472	B-472	White	1.000 (25.4)	85ft (25.9m)	-	-	1.200 (30.5)	1 roll (cont.)		B30-R4300
BBP33 Only	Fig. 3	B33C-1500-472	B-472	White	1.500 (38.1)	85ft (25.9m)	-	-	1.900 (48.3)	1 roll (cont.)		B30-R4300
BBP33 Only	Fig. 3	B33C-2000-472	B-472	White	2.000 (50.8)	85ft (25.9m)	-	-	2.200 (55.9)	1 roll (cont.)		B30-R4300
BBP33 Only	Fig. 3	B33C-3000-472	B-472	White	3.000 (76.2)	85ft (25.9m)	-	-	3.400 (86.4)	1 roll (cont.)		B30-R4300
BBP33 Only	Fig. 3	B33C-1000-472YL	B-472	Yellow	1.000 (25.4)	85ft (25.9m)	-	-	1.200 (30.5)	1 roll (cont.)		B30-R4300
BBP33 Only	Fig. 3	B33C-1500-472YL	B-472	Yellow	1.500 (38.1)	85ft (25.9m)	-	-	1.900 (48.3)	1 roll (cont.)		B30-R4300
BBP33 Only	Fig. 3	B33C-2000-472YL	B-472	Yellow	2.000 (50.8)	85ft (25.9m)	-	-	2.200 (55.9)	1 roll (cont.)		B30-R4300
BBP33 Only	Fig. 3	B33C-3000-472YL	B-472	Yellow	3.000 (76.2)	85ft (25.9m)	-	-	3.400 (86.4)	1 roll (cont.)		B30-R4300

Benchtop Printers

B30 Series

PermaSleeve® LSZH Low Smoke Zero Halogen Polyolefin Wire Marking Sleeves (B-7641)

Military/Industrial Grade. 2:1 Shrink ratio.

- Low halogen wire marking sleeves offer outstanding fire safety properties and minimal smoke emission
- Meets the following industry specifications:
 - SAE-AS-81531 - MIL-STD-202
 - Tested per ASTM E162, ASTM E662

Service temp: -22°F to 221°F **RoHS**




Figure 20



Fits Printer Model	Diagram	Catalog #	Material	Color	For Wire Diameters Inch (mm) Min. Max.	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Sleeves Per Roll	Rec. Ribbon
3:1 Shrink ratio double-side printable, 2" sleeve width (dimension A):											
BBP33	Fig. 20	B33D-94-2-7641	B-7641	White	0.047 (1.2) - 0.080 (2.0)	0.094 (2.4)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000	B30-R6000
BBP33	Fig. 20	B33D-125-2-7641	B-7641	White	0.062 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	.020 (0.5) +/- .003 (0.07)	1	1000	B30-R6000
BBP33	Fig. 20	B33D-187-2-7641	B-7641	White	0.094 (2.4) - 0.151 (3.8)	0.187 (4.8)	0.094 (2.4)	.020 (0.5) +/- .003 (0.07)	1	750	B30-R6000
BBP33	Fig. 20	B33D-250-2-7641	B-7641	White	0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.126 (3.2)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R6000
BBP33	Fig. 20	B33D-375-2-7641	B-7641	White	0.188 (4.8) - 0.320 (8.1)	0.375 (9.5)	0.189 (4.8)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R6000
BBP33	Fig. 20	B33D-500-2-7641	B-7641	White	0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.252 (6.4)	.025 (0.6) +/- .003 (0.07)	1	350	B30-R6000
BBP33	Fig. 20	B33D-750-2-7641	B-7641	White	0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	.030 (0.8) +/- .003 (0.07)	1	250	B30-R6000
BBP33	Fig. 20	B33D-1000-2-7641	B-7641	White	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.035 (0.9) +/- .005 (0.1)	1	250	B30-R6000
BBP33	Fig. 20	B33D-1500-2-7641	B-7641	White	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	.040 (1.0) +/- .006 (0.2)	1	150	B30-R6000
BBP33	Fig. 20	B33D-94-2-7641Y	B-7641	Yellow	0.047 (1.2) - 0.080 (2.0)	0.094 (2.4)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000	B30-R6000
BBP33	Fig. 20	B33D-125-2-7641Y	B-7641	Yellow	0.062 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	.020 (0.5) +/- .003 (0.07)	1	1000	B30-R6000
BBP33	Fig. 20	B33D-187-2-7641Y	B-7641	Yellow	0.094 (2.4) - 0.151 (3.8)	0.187 (4.8)	0.094 (2.4)	.020 (0.5) +/- .003 (0.07)	1	750	B30-R6000
BBP33	Fig. 20	B33D-250-2-7641Y	B-7641	Yellow	0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.126 (3.2)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R6000
BBP33	Fig. 20	B33D-375-2-7641Y	B-7641	Yellow	0.188 (4.8) - 0.320 (8.1)	0.375 (9.5)	0.189 (4.8)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R6000
BBP33	Fig. 20	B33D-500-2-7641Y	B-7641	Yellow	0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.252 (6.4)	.025 (0.6) +/- .003 (0.07)	1	350	B30-R6000
BBP33	Fig. 20	B33D-750-2-7641Y	B-7641	Yellow	0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	.030 (0.8) +/- .003 (0.07)	1	250	B30-R6000
BBP33	Fig. 20	B33D-1000-2-7641Y	B-7641	Yellow	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.035 (0.9) +/- .005 (0.1)	1	250	B30-R6000
BBP33	Fig. 20	B33D-1500-2-7641Y	B-7641	Yellow	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	.040 (1.0) +/- .006 (0.2)	1	150	B30-R6000

PermaSleeve® HX Polyolefin Wire Marking Sleeves (B-7642)

Military/Industrial Grade. 2:1 Shrink ratio.

- Flame retardant and high-temp rated but not as high temp as B-345 "HT" sleeves
- Meets the following industry specifications:
 - SAE-AMS-DTL-23053/5 (class 1 and 3) - SAE-AS-81531
 - MIL-STD-202 - Tested per ASTM E162, ASTM E662

Service temp: -40°F to 248°F (short burst max temp: 5 min at 464°F, 24 hrs at 320°F) **RoHS**





Figure 20

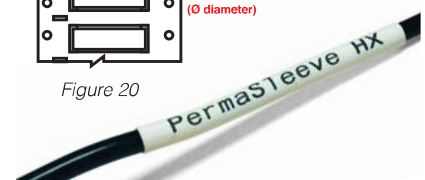

Fits Printer Model	Diagram	Catalog #	Material	Color	For Wire Gauge (approx.)	For Wire Diameters Inch (mm) Min. Max.	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Sleeves Per Roll	Rec. Ribbon
3:1 Shrink ratio single-side printable, 2" sleeve width (dimension A):												
BBP33	Fig. 20	B33-94-2-7642	B-7642	White	24 to 20	0.047 (1.2) - 0.080 (2.0)	0.094 (2.4)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	500	B30-R4300
BBP33	Fig. 20	B33-125-2-7642	B-7642	White	20 to 16	0.062 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	.020 (0.5) +/- .003 (0.07)	1	500	B30-R4300
BBP33	Fig. 20	B33-187-2-7642	B-7642	White	16 to 10	0.094 (2.4) - 0.151 (3.8)	0.187 (4.8)	0.094 (2.4)	.020 (0.5) +/- .003 (0.07)	1	450	B30-R4300
BBP33	Fig. 20	B33-250-2-7642	B-7642	White	12 to 8	0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.126 (3.2)	.025 (0.6) +/- .003 (0.07)	1	400	B30-R4300
BBP33	Fig. 20	B33-375-2-7642	B-7642	White	8 to 4	0.188 (4.8) - 0.320 (8.1)	0.375 (9.5)	0.189 (4.8)	.025 (0.6) +/- .003 (0.07)	1	250	B30-R4300
BBP33	Fig. 20	B33-500-2-7642	B-7642	White	6 to 1	0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.252 (6.4)	.025 (0.6) +/- .003 (0.07)	1	225	B30-R4300
BBP33	Fig. 20	B33-750-2-7642	B-7642	White	2 to 4/0	0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	.030 (0.8) +/- .003 (0.07)	1	150	B30-R4300
BBP33	Fig. 20	B33-1000-2-7642	B-7642	White	2/0 to 0.950 dia	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.035 (0.9) +/- .005 (0.1)	1	150	B30-R4300
BBP33	Fig. 20	B33-1500-2-7642	B-7642	White	N/A	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	.040 (1.0) +/- .006 (0.2)	1	50	B30-R4300
BBP33	Fig. 20	B33-2000-2-7642	B-7642	White	N/A	1.000 (25.4) - 1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	.045 (1.1) +/- .007 (0.2)	1	50	B30-R4300
3:1 Shrink ratio double-side printable, 2" sleeve width (dimension A):												
BBP33	Fig. 20	B33D-94-2-7642	B-7642	White	24 to 20	0.047 (1.2) - 0.080 (2.0)	0.094 (2.4)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	500	B30-R4300
BBP33	Fig. 20	B33D-125-2-7642	B-7642	White	20 to 16	0.062 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	.020 (0.5) +/- .003 (0.07)	1	500	B30-R4300
BBP33	Fig. 20	B33D-187-2-7642	B-7642	White	16 to 10	0.094 (2.4) - 0.151 (3.8)	0.187 (4.8)	0.094 (2.4)	.020 (0.5) +/- .003 (0.07)	1	450	B30-R4300
BBP33	Fig. 20	B33D-250-2-7642	B-7642	White	12 to 8	0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.126 (3.2)	.025 (0.6) +/- .003 (0.07)	1	400	B30-R4300
BBP33	Fig. 20	B33D-375-2-7642	B-7642	White	8 to 4	0.188 (4.8) - 0.320 (8.1)	0.375 (9.5)	0.189 (4.8)	.025 (0.6) +/- .003 (0.07)	1	250	B30-R4300
BBP33	Fig. 20	B33D-500-2-7642	B-7642	White	6 to 1	0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.252 (6.4)	.025 (0.6) +/- .003 (0.07)	1	225	B30-R4300
BBP33	Fig. 20	B33D-750-2-7642	B-7642	White	2 to 4/0	0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	.030 (0.8) +/- .003 (0.07)	1	150	B30-R4300
BBP33	Fig. 20	B33D-1000-2-7642	B-7642	White	2/0 to 0.950 dia	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.035 (0.9) +/- .005 (0.1)	1	150	B30-R4300
BBP33	Fig. 20	B33D-1500-2-7642	B-7642	White	N/A	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	.040 (1.0) +/- .006 (0.2)	1	50	B30-R4300
BBP33	Fig. 20	B33D-2000-2-7642	B-7642	White	N/A	1.000 (25.4) - 1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	.045 (1.1) +/- .007 (0.2)	1	50	B30-R4300

B30 & B33 Series Materials

BradyID.com/s35

PermaSleeve® FR Fluid Resistant Wire Marking Sleeves (B-344)

Military/Industrial Grade. 3:1 Shrink ratio.

- Designed for labeling wires in applications where they will be exposed to fuels, lubricants and harsh chemicals such as in the installation of hydrogen fuel cells in aerospace
- Resistant to harsh chemicals including JP8 Jet Fuel, Skydrol® and DOT 3 brake fluid
- Meets the following industry specifications:
 - SAE-AMS-DTL-23053/6 (class 1)
 - MIL-STD-202G method 215K

Service temp: -94°F to 267°F
Agency Approvals for: **RoHS**




Figure 20



Fits Printer Model	Diagram	Catalog #	Material	Color	For Wire Gauge (approx.)	For Wire Diameters Inch (mm) Min. Max.	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Per Roll	Rec. Ribbon
3:1 Shrink ratio double-side printable, 2" sleeve width (dimension A):												
BBP33	Fig. 20	B33D-94-2-344	B-344	White	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	0.024 (0.6) +/- 0.003 (0.1)	1	1000	B30-R6600
BBP33	Fig. 20	B33D-125-2-344	B-344	White	22 to 16	0.046 (1.2) - 0.111 (2.8)	0.125 (3.1)	0.047 (1.2)	0.020 (0.5) +/- 0.003 (0.1)	1	1000	B30-R6600
BBP33	Fig. 20	B33D-187-2-344	B-344	White	20 to 10	0.062 (1.6) - 0.15 (3.81)	0.187 (4.8)	0.062 (1.6)	0.020 (0.5) +/- 0.003 (0.1)	1	750	B30-R6600
BBP33	Fig. 20	B33D-250-2-344	B-344	White	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.35)	0.093 (2.4)	0.025 (0.6) +/- 0.003 (0.1)	1	500	B30-R6600
BBP33	Fig. 20	B33D-375-2-344	B-344	White	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	0.025 (0.6) +/- 0.003 (0.1)	1	500	B30-R6600
BBP33	Fig. 20	B33D-500-2-344	B-344	White	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.119 (3.0)	0.025 (0.6) +/- 0.003 (0.1)	1	350	B30-R6600
BBP33	Fig. 20	B33D-750-2-344	B-344	White	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.05)	0.250 (6.35)	0.025 (0.6) +/- 0.003 (0.1)	1	250	B30-R6600
BBP33	Fig. 20	B33D-1000-2-344	B-344	White	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	0.036 (0.9) +/- 0.003 (0.1)	1	250	B30-R6600
BBP33	Fig. 20	B33D-1500-2-344	B-344	White	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	0.035 (0.9) +/- 0.003 (0.1)	1	150	B30-R6600
BBP33	Fig. 20	B33D-94-2-344YL	B-344	Yellow	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	0.024 (0.6) +/- 0.003 (0.1)	1	1000	B30-R6600
BBP33	Fig. 20	B33D-125-2-344YL	B-344	Yellow	22 to 16	0.046 (1.2) - 0.111 (2.8)	0.125 (3.1)	0.047 (1.2)	0.020 (0.5) +/- 0.003 (0.1)	1	1000	B30-R6600
BBP33	Fig. 20	B33D-187-2-344YL	B-344	Yellow	20 to 10	0.062 (1.6) - 0.15 (3.81)	0.187 (4.8)	0.062 (1.6)	0.020 (0.5) +/- 0.003 (0.1)	1	750	B30-R6600
BBP33	Fig. 20	B33D-250-2-344YL	B-344	Yellow	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.35)	0.093 (2.4)	0.025 (0.6) +/- 0.003 (0.1)	1	500	B30-R6600
BBP33	Fig. 20	B33D-375-2-344YL	B-344	Yellow	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	0.025 (0.6) +/- 0.003 (0.1)	1	500	B30-R6600
BBP33	Fig. 20	B33D-500-2-344YL	B-344	Yellow	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.119 (3.0)	0.025 (0.6) +/- 0.003 (0.1)	1	350	B30-R6600
BBP33	Fig. 20	B33D-750-2-344YL	B-344	Yellow	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.05)	0.250 (6.35)	0.025 (0.6) +/- 0.003 (0.1)	1	250	B30-R6600
BBP33	Fig. 20	B33D-1000-2-344YL	B-344	Yellow	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	0.036 (0.9) +/- 0.003 (0.1)	1	250	B30-R6600
BBP33	Fig. 20	B33D-1500-2-344YL	B-344	Yellow	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	0.035 (0.9) +/- 0.003 (0.1)	1	150	B30-R6600
BBP33	Fig. 20	B33D-94-2-344BK	B-344	Black	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	0.024 (0.6) +/- 0.003 (0.1)	1	1000	B30-R6700-WT
BBP33	Fig. 20	B33D-125-2-344BK	B-344	Black	22 to 16	0.046 (1.2) - 0.111 (2.8)	0.125 (3.1)	0.047 (1.2)	0.020 (0.5) +/- 0.003 (0.1)	1	1000	B30-R6700-WT
BBP33	Fig. 20	B33D-187-2-344BK	B-344	Black	20 to 10	0.062 (1.6) - 0.15 (3.81)	0.187 (4.8)	0.062 (1.6)	0.020 (0.5) +/- 0.003 (0.1)	1	750	B30-R6700-WT
BBP33	Fig. 20	B33D-250-2-344BK	B-344	Black	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.35)	0.093 (2.4)	0.025 (0.6) +/- 0.003 (0.1)	1	500	B30-R6700-WT
BBP33	Fig. 20	B33D-375-2-344BK	B-344	Black	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	0.025 (0.6) +/- 0.003 (0.1)	1	500	B30-R6700-WT
BBP33	Fig. 20	B33D-500-2-344BK	B-344	Black	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.119 (3.0)	0.025 (0.6) +/- 0.003 (0.1)	1	350	B30-R6700-WT
BBP33	Fig. 20	B33D-750-2-344BK	B-344	Black	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.05)	0.250 (6.35)	0.025 (0.6) +/- 0.003 (0.1)	1	250	B30-R6700-WT
BBP33	Fig. 20	B33D-1000-2-344BK	B-344	Black	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	0.036 (0.9) +/- 0.003 (0.1)	1	250	B30-R6700-WT
BBP33	Fig. 20	B33D-1500-2-344BK	B-344	Black	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	0.035 (0.9) +/- 0.003 (0.1)	1	150	B30-R6700-WT

Benchtop Printers

B30 Series

B30 & B33 Series Materials

BradyID.com/s35

PermaSleeve® HT High Temperature PVDF Wire Marking Sleeves (B-345)

High temperature, low outgassing. 2:1 Shrink ratio.

- A 2:1 shrink ratio wire marker sleeve specifically designed for high temperature and low vacuum outgassing applications
- Made from irradiated high-temp Polyvinylidene Fluoride (PVDF) heat shrink tubing
- Fade-resistant and flame-retardant
- Meets the following industry specifications:
 - NASA SP-R-0022A Outgassing Performance
 - Tested per ASTM E162, ASTM E662, SAE-AMS-DTL-23053/18 (class 2)
 - MIL-STD-202 - SAE-AS-81531

Service temp: -67°F to 437°F Agency Approvals for HT and HX Sleeves: RoHS

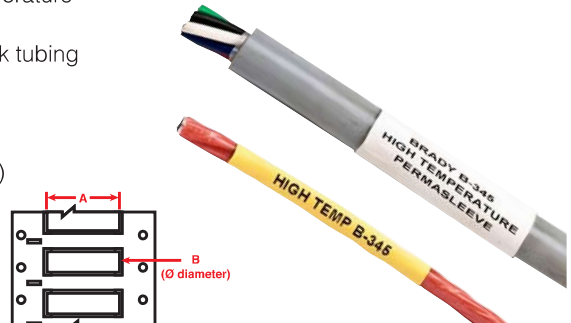


Figure 20

Fits Printer Model	Diagram	Catalog #	Material	Color	For Wire Gauge (approx.)	For Wire Diameters Inch (mm) Min. Max.	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Sleeves Per Roll	Rec. Ribbon
3:1 Shrink ratio double-side printable, 2" sleeve width (dimension A):												
BBP33	Fig. 20	B33D-94-2-345	B-345	White	26 to 20	0.031 (0.8) - 0.080 (2.0)	0.094 (2.4)	0.031 (0.8)	.015 (0.4) +/- .003 (0.07)	1	1000	B30-R6000
BBP33	Fig. 20	B33D-94-2-345BK	B-345	Black	26 to 20	0.031 (0.8) - 0.080 (2.0)	0.094 (2.4)	0.031 (0.8)	.015 (0.4) +/- .003 (0.07)	1	1000	B30-R4400-WT
2:1 Shrink ratio double-side printable, 2" sleeve width (dimension A):												
BBP33	Fig. 20	B33D-125-2-345	B-345	White	20 to 16	0.063 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.062 (1.6)	.015 (0.4) +/- .003 (0.07)	1	1000	B30-R6000
BBP33	Fig. 20	B33D-187-2-345	B-345	White	16 to 10	0.094 (2.4) - 0.150 (3.8)	0.187 (4.7)	0.093 (2.4)	.015 (0.4) +/- .003 (0.07)	1	750	B30-R6000
BBP33	Fig. 20	B33D-250-2-345	B-345	White	12 to 8	0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.125 (3.2)	.015 (0.4) +/- .003 (0.07)	1	500	B30-R6000
BBP33	Fig. 20	B33D-375-2-345	B-345	White	8 to 4	0.187 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.187 (4.7)	.015 (0.4) +/- .003 (0.07)	1	500	B30-R6000
BBP33	Fig. 20	B33D-500-2-345	B-345	White	6 to 1	0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.250 (6.4)	.015 (0.4) +/- .003 (0.07)	1	350	B30-R6000
BBP33	Fig. 20	B33D-750-2-345	B-345	White	2 to 4/0	0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.375 (9.5)	.015 (0.4) +/- .003 (0.07)	1	250	B30-R6000
BBP33	Fig. 20	B33D-1000-2-345	B-345	White	2/0 to 0.950 dia	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.017 (0.4) +/- .004 (0.1)	1	250	B30-R6000
BBP33	Fig. 20	B33D-1500-2-345	B-345	White	N/A	0.750 (19.1) - 1.400 (35.6)	1.500 (38.1)	0.750 (19.1)	.024 (0.6) +/- .004 (0.1)	1	150	B30-R6000
BBP33	Fig. 20	B33D-125-2-345BK	B-345	Black	20 to 16	0.063 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.062 (1.6)	.015 (0.4) +/- .003 (0.07)	1	1000	B30-R4400-WT
BBP33	Fig. 20	B33D-187-2-345BK	B-345	Black	16 to 10	0.094 (2.4) - 0.150 (3.8)	0.187 (4.7)	0.093 (2.4)	.015 (0.4) +/- .003 (0.07)	1	750	B30-R4400-WT
BBP33	Fig. 20	B33D-250-2-345BK	B-345	Black	12 to 8	0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.125 (3.2)	.015 (0.4) +/- .003 (0.07)	1	500	B30-R4400-WT
BBP33	Fig. 20	B33D-375-2-345BK	B-345	Black	8 to 4	0.187 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.187 (4.7)	.015 (0.4) +/- .003 (0.07)	1	500	B30-R4400-WT
BBP33	Fig. 20	B33D-500-2-345BK	B-345	Black	6 to 1	0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.250 (6.4)	.015 (0.4) +/- .003 (0.07)	1	350	B30-R4400-WT
BBP33	Fig. 20	B33D-750-2-345BK	B-345	Black	3 to 4/0	0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.375 (9.5)	.015 (0.4) +/- .003 (0.07)	1	250	B30-R4400-WT
BBP33	Fig. 20	B33D-1000-2-345BK	B-345	Black	2/0 to 0.950 dia	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.017 (0.4) +/- .004 (0.1)	1	250	B30-R4400-WT
BBP33	Fig. 20	B33D-1500-2-345BK	B-345	Black	N/A	0.750 (19.1) - 1.400 (35.6)	1.500 (38.1)	0.750 (19.1)	.024 (0.6) +/- .004 (0.1)	1	150	B30-R4400-WT

B30 & B33 Series Materials

BradyID.com/s35

PermaSleeve® PS Polyolefin Wire Marking Sleeves (B-342)

Standard Military/Industrial Grade. 3:1 Shrink ratio.

- A 3:1 heat shrinkable wire marker sleeve that fits snugly around wires
- Can be used for identification or wire protection
- Fade-resistant and flame-retardant
- Meets the following insulating and physical property specifications:
 - SAE-AMS-DTL-23053/5C (class 1)
 - SAE-AS-81531
 - MIL-STD-202
 - Tested per ASTM E162, ASTM E662

Service temp: -40°F to 267°F

(short burst max temp: 5 min at 500°F, 24 hrs at 350°F)

Agency Approvals: RoHS




Figure 20





Figure 20-2



Fits Printer Model	Diagram	Catalog #	Material	Color	For Wire Gauge (approx.)	For Wire Diameters Inch (mm) Min. Max.	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Per Roll	Rec. Ribbon
3:1 Shrink ratio single-side printable, 2" sleeve width (dimension A):												
BBP33	Fig. 20	B33-94-2-342	B-342	White	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	1	1000	B30-R4300
BBP33	Fig. 20	B33-125-2-342	B-342	White	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000	B30-R4300
BBP33	Fig. 20	B33-187-2-342	B-342	White	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	1	750	B30-R4300
BBP33	Fig. 20	B33-250-2-342	B-342	White	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R4300
BBP33	Fig. 20	B33-375-2-342	B-342	White	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R4300
BBP33	Fig. 20	B33-500-2-342	B-342	White	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) +/- .003 (0.07)	1	350	B30-R4300
BBP33	Fig. 20	B33-750-2-342	B-342	White	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) +/- .003 (0.07)	1	250	B30-R4300
BBP33	Fig. 20	B33-1000-2-342	B-342	White	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	1	250	B30-R4300
BBP33	Fig. 20	B33-1500-2-342	B-342	White	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	150	B30-R4300
BBP33	Fig. 20	B33-94-2-342YL	B-342	Yellow	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	1	1000	B30-R4300
BBP33	Fig. 20	B33-125-2-342YL	B-342	Yellow	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000	B30-R4300
BBP33	Fig. 20	B33-187-2-342YL	B-342	Yellow	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	1	750	B30-R4300
BBP33	Fig. 20	B33-250-2-342YL	B-342	Yellow	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R4300
BBP33	Fig. 20	B33-375-2-342YL	B-342	Yellow	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R4300
BBP33	Fig. 20	B33-500-2-342YL	B-342	Yellow	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) +/- .003 (0.07)	1	350	B30-R4300
BBP33	Fig. 20	B33-750-2-342YL	B-342	Yellow	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) +/- .003 (0.07)	1	250	B30-R4300
BBP33	Fig. 20	B33-1000-2-342YL	B-342	Yellow	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	1	250	B30-R4300
BBP33	Fig. 20	B33-1500-2-342YL	B-342	Yellow	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	150	B30-R4300
BBP33	Fig. 20	B33-1500-2-342BK	B-342	Black	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	150	B30-R4500-SV
3:1 Shrink ratio single-side printable, 1" sleeve width in "2-up pre-cut" configuration (dimension A):												
BBP33	Fig. 20-2	B33-94-2-342-2	B-342	White	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	2	2000	B30-R4300
BBP33	Fig. 20-2	B33-125-2-342-2	B-342	White	22 to 16	0.046 (1.2) - 0.111 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	2	2000	B30-R4300
BBP33	Fig. 20-2	B33-187-2-342-2	B-342	White	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	2	1500	B30-R4300
BBP33	Fig. 20-2	B33-250-2-342-2	B-342	White	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	2	1000	B30-R4300
BBP33	Fig. 20-2	B33-375-2-342-2	B-342	White	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	2	1000	B30-R4300
BBP33	Fig. 20-2	B33-500-2-342-2	B-342	White	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.119 (3.0)	.025 (0.6) +/- .003 (0.07)	2	700	B30-R4300
BBP33	Fig. 20-2	B33-750-2-342-2	B-342	White	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.1)	0.250 (6.35)	.025 (0.6) +/- .003 (0.07)	2	500	B30-R4300
BBP33	Fig. 20-2	B33-1000-2-342-2	B-342	White	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	2	500	B30-R4300
BBP33	Fig. 20-2	B33-1500-2-342-2	B-342	White	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	2	150	B30-R4300
BBP33	Fig. 20-2	B33-94-2-342YL-2	B-342	Yellow	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	2	2000	B30-R4300
BBP33	Fig. 20-2	B33-125-2-342YL-2	B-342	Yellow	22 to 16	0.046 (1.2) - 0.111 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	2	2000	B30-R4300
BBP33	Fig. 20-2	B33-750-2-342YL-2	B-342	Yellow	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.1)	0.250 (6.35)	.025 (0.6) +/- .003 (0.07)	2	500	B30-R4300
BBP33	Fig. 20-2	B33-500-2-342YL-2	B-342	Yellow	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.119 (3.0)	.025 (0.6) +/- .003 (0.07)	2	700	B30-R4300
BBP33	Fig. 20-2	B33-1000-2-342YL-2	B-342	Yellow	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	2	500	B30-R4300
BBP33	Fig. 20-2	B33-1500-2-342YL-2	B-342	Yellow	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	2	300	B30-R4300

B30 & B33 Series Materials

BradyID.com/s35

PermaSleeve® PS Polyolefin Wire Marking Sleeves (Continued)

Fits Printer Model	Diagram	Catalog #	Material	Color	For Wire Gauge (approx.)	For Wire Diameters Inch (mm) Min. Max.	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Per Roll	Rec. Ribbon
3:1 Shrink ratio double-side printable, 2" sleeve width (dimension A):												
BBP33	Fig. 20	B33D-94-2-342	B-342	White	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	1	1000	B30-R4300
BBP33	Fig. 20	B33D-125-2-342	B-342	White	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000	B30-R4300
BBP33	Fig. 20	B33D-125-2-342-2	B-342	White	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	2	2000	B30-R4300
BBP33	Fig. 20	B33D-187-2-342	B-342	White	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	1	750	B30-R4300
BBP33	Fig. 20	B33D-250-2-342	B-342	White	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R4300
BBP33	Fig. 20	B33D-375-2-342	B-342	White	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R4300
BBP33	Fig. 20	B33D-500-2-342	B-342	White	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) +/- .003 (0.07)	1	350	B30-R4300
BBP33	Fig. 20	B33D-750-2-342	B-342	White	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) +/- .003 (0.07)	1	250	B30-R4300
BBP33	Fig. 20	B33D-1000-2-342	B-342	White	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	1	250	B30-R4300
BBP33	Fig. 20	B33D-1500-2-342	B-342	White	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	150	B30-R4300
BBP33	Fig. 20	B33D-94-2-342YL	B-342	Yellow	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	1	1000	B30-R4300
BBP33	Fig. 20	B33D-125-2-342YL	B-342	Yellow	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000	B30-R4300
BBP33	Fig. 20	B33D-187-2-342YL	B-342	Yellow	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	1	750	B30-R4300
BBP33	Fig. 20	B33D-250-2-342YL	B-342	Yellow	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R4300
BBP33	Fig. 20	B33D-375-2-342YL	B-342	Yellow	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R4300
BBP33	Fig. 20	B33D-500-2-342YL	B-342	Yellow	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) +/- .003 (0.07)	1	350	B30-R4300
BBP33	Fig. 20	B33D-750-2-342YL	B-342	Yellow	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) +/- .003 (0.07)	1	250	B30-R4300
BBP33	Fig. 20	B33D-1000-2-342YL	B-342	Yellow	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	1	250	B30-R4300
BBP33	Fig. 20	B33D-1500-2-342YL	B-342	Yellow	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	150	B30-R4300
BBP33	Fig. 20	B33D-94-2-342BK	B-342	Black	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	1	1000	B30-R4500-SV
BBP33	Fig. 20	B33D-125-2-342BK	B-342	Black	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000	B30-R4500-SV
BBP33	Fig. 20	B33D-187-2-342BK	B-342	Black	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	1	750	B30-R4500-SV
BBP33	Fig. 20	B33D-250-2-342BK	B-342	Black	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R4500-SV
BBP33	Fig. 20	B33D-375-2-342BK	B-342	Black	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R4500-SV
BBP33	Fig. 20	B33D-500-2-342BK	B-342	Black	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) +/- .003 (0.07)	1	350	B30-R4500-SV
BBP33	Fig. 20	B33D-750-2-342BK	B-342	Black	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) +/- .003 (0.07)	1	250	B30-R4500-SV
BBP33	Fig. 20	B33D-1000-2-342BK	B-342	Black	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	1	250	B30-R4500-SV
BBP33	Fig. 20	B33D-1500-2-342BK	B-342	Black	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	150	B30-R4500-SV

BBP®33 Prints Double-Sided Wire Sleeves! Print double sided sleeves with no wasted labels!

Use the appropriate double sided sleeve parts (B33D-) and create your print job using LabelMark® software's "two-sided print" feature.

After the first side of your print job is complete, the software prompts you to cut the media and re-insert it for a second print pass.



B30 & B33 Series Materials

BradyID.com/s35

Raised Profile Labels - Engraved Plate Substitutes - Rectangular Style (B-593)

Costs up to 80% less than engraved legend plates

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70mm thick)
- Ideal for inside-panel backer board labels and front-of-enclosure labeling
- Up to 80% less than engraved plates and print out in about 4 seconds
- 10-year outdoor durability rating

6 colors, 7 rectangular sizes

Service Temp: -4°F to 212°F Application Temp: 50°F to 212°F

Average Outdoor Durability: Up to 10 years

Agency Approvals:





Figure 18c



Benchtop Printers

B30 Series

Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Height A Inch (mm)	Label Width B Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-171-593-WT	B-593	White	0.490 (12.5)	1.060 (26.9)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-172-593-WT	B-593	White	0.590 (15.0)	1.770 (45.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-175-593-WT	B-593	White	0.750 (19.1)	3.000 (76.2)	1.000 (25.4)	3.250 (82.6)	1	375	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-173-593-WT	B-593	White	1.000 (25.4)	2.000 (50.8)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-174-593-WT	B-593	White	1.000 (25.4)	4.000 (101.6)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-176-593-WT	B-593	White	1.000 (25.4)	3.000 (76.2)	1.250 (31.8)	3.250 (82.6)	1	300	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-177-593-WT	B-593	White	2.500 (63.5)	3.000 (76.2)	2.750 (69.9)	3.250 (82.6)	1	125	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-171-593-YL	B-593	Yellow	0.490 (12.5)	1.060 (26.9)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-172-593-YL	B-593	Yellow	0.590 (15.0)	1.770 (45.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-175-593-YL	B-593	Yellow	0.750 (19.1)	3.000 (76.2)	1.000 (25.4)	3.250 (82.6)	1	375	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-173-593-YL	B-593	Yellow	1.000 (25.4)	2.000 (50.8)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-174-593-YL	B-593	Yellow	1.000 (25.4)	4.000 (101.6)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-176-593-YL	B-593	Yellow	1.000 (25.4)	3.000 (76.2)	1.250 (31.8)	3.250 (82.6)	1	300	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-177-593-YL	B-593	Yellow	2.500 (63.5)	3.000 (76.2)	2.750 (69.9)	3.250 (82.6)	1	125	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-171-593-BK	B-593	Black	0.490 (12.5)	1.060 (26.9)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-172-593-BK	B-593	Black	0.590 (15.0)	1.770 (45.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-175-593-BK	B-593	Black	0.750 (19.1)	3.000 (76.2)	1.000 (25.4)	3.250 (82.6)	1	375	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-173-593-BK	B-593	Black	1.000 (25.4)	2.000 (50.8)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-174-593-BK	B-593	Black	1.000 (25.4)	4.000 (101.6)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-176-593-BK	B-593	Black	1.000 (25.4)	3.000 (76.2)	1.250 (31.8)	3.250 (82.6)	1	300	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-177-593-BK	B-593	Black	2.500 (63.5)	3.000 (76.2)	2.750 (69.9)	3.250 (82.6)	1	125	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-171-593-GN	B-593	Green	0.490 (12.5)	1.060 (26.9)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-172-593-GN	B-593	Green	0.590 (15.0)	1.770 (45.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-175-593-GN	B-593	Green	0.750 (19.1)	3.000 (76.2)	1.000 (25.4)	3.250 (82.6)	1	375	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-173-593-GN	B-593	Green	1.000 (25.4)	2.000 (50.8)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-174-593-GN	B-593	Green	1.000 (25.4)	4.000 (101.6)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-176-593-GN	B-593	Green	1.000 (25.4)	3.000 (76.2)	1.250 (31.8)	3.250 (82.6)	1	300	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-177-593-GN	B-593	Green	2.500 (63.5)	3.000 (76.2)	2.750 (69.9)	3.250 (82.6)	1	125	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-171-593-RD	B-593	Red	0.490 (12.5)	1.060 (26.9)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-172-593-RD	B-593	Red	0.590 (15.0)	1.770 (45.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-173-593-RD	B-593	Red	1.000 (25.4)	2.000 (50.8)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-174-593-RD	B-593	Red	1.000 (25.4)	4.000 (101.6)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-171-593-SL	B-593	Silver	0.490 (12.5)	1.060 (26.9)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-172-593-SL	B-593	Silver	0.590 (15.0)	1.770 (45.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-173-593-SL	B-593	Silver	1.000 (25.4)	2.000 (50.8)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18c	B30EP-174-593-SL	B-593	Silver	1.000 (25.4)	4.000 (101.6)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R6000

U.S. Patent Nos. US8475914B2; US9005729B2.

B30 & B33 Series Materials

BradyID.com/s35

Raised Profile Labels - Engraved Plate Substitutes - Push Button Style (B-593)



Costs up to 80% less than engraved legend plates

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70mm thick)
- High performance, low cost substitute to engraved plates
- 10-year outdoor durability rating
- On-demand labeling: labels print out in less than 4 seconds
- 5 push button sizes (including keyed and non-keyed 22.5mm, and 30.5mm hole diameter keyed)

Service Temp: -4°F to 212°F Application Temp: 50°F to 212°F

Average Outdoor Durability: Up to 10 years

Agency Approvals:



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Height A Inch (mm)	Label Width B Inch (mm)	Hole Diameter C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-167-593-WT	B-593	White	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18b	B30EP-167U-593-WT	B-593	White	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-169-593-WT	B-593	White	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-168-593-WT	B-593	White	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-170-593-WT	B-593	White	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-167-593-YL	B-593	Yellow	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18b	B30EP-167U-593-YL	B-593	Yellow	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-169-593-YL	B-593	Yellow	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-168-593-YL	B-593	Yellow	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-170-593-YL	B-593	Yellow	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R6000
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-167-593-BK	B-593	Black	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18b	B30EP-167U-593-BK	B-593	Black	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-169-593-BK	B-593	Black	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-168-593-BK	B-593	Black	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-170-593-BK	B-593	Black	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-167-593-GN	B-593	Green	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18b	B30EP-167U-593-GN	B-593	Green	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-169-593-GN	B-593	Green	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-168-593-GN	B-593	Green	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-170-593-GN	B-593	Green	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-167-593-RD	B-593	Red	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18b	B30EP-167U-593-RD	B-593	Red	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-169-593-RD	B-593	Red	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-168-593-RD	B-593	Red	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R4400-WT
BBP30, 31, 33, 35, 37	Fig. 18a	B30EP-170-593-RD	B-593	Red	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R4400-WT

U.S. Patent Nos. US8475914B2; US9005729B2.

B30 & B33 Series Materials

BradyID.com/s35


Polyester General ID Labels (B-422, B-423, B-430, B-432, B483, B-484, B-489)

- For general purpose industrial ID applications, bin and shelf labeling in production areas, and PC board component ID

B-423, B-483, B-489: Service temp: -94°F to 248°F
Agency approvals:  

B-430, B-432: Service temp: -40°F to 212°F
Agency approvals:  

B-484: Service temp: -40°F to 240°F
Agency approvals: 

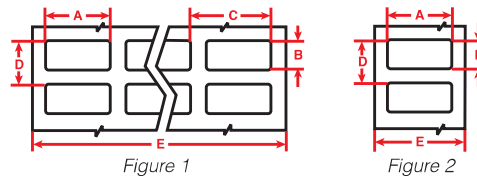

Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard adhesive (B-423 gloss white):												
BBP33 Only	Fig. 4	B33-11-423	B-423	Gloss White	0.250 (6.4)	0.250 (6.4)	0.250 (6.4)	0.375 (9.5)	3.200 (81.3)	12	15000	B30-R6000
BBP33 Only	Fig. 1	B33-38-423	B-423	Gloss White	0.375 (9.5)	0.375 (9.5)	0.438 (11.1)	0.475 (12.1)	3.200 (81.3)	9	5000	B30-R6000
BBP33 Only	Fig. 1	B33-149-423	B-423	Gloss White	0.500 (12.7)	0.500 (12.7)	0.600 (15.2)	0.600 (15.2)	2.500 (63.5)	4	5000	B30-R6000
BBP33 Only	Fig. 1	B33-1-423	B-423	Gloss White	0.750 (19.1)	0.250 (6.4)	0.800 (20.3)	0.350 (8.9)	3.350 (85.1)	4	5000	B30-R6000
BBP33 Only	Fig. 2	B33-46-423	B-423	Gloss White	0.750 (19.1)	0.250 (6.4)	-	0.350 (8.9)	0.950 (24.1)	1	5000	B30-R6000
BBP33 Only	Fig. 2	B33-49-423	B-423	Gloss White	0.900 (22.9)	0.250 (6.4)	-	0.350 (8.9)	1.100 (27.9)	1	5000	B30-R6000
BBP33 Only	Fig. 2	B33-103-423	B-423	Gloss White	1.000 (25.4)	0.250 (6.4)	-	0.350 (8.9)	1.200 (30.5)	1	5000	B30-R6000
BBP33 Only	Fig. 1	B33-3-423	B-423	Gloss White	1.000 (25.4)	0.375 (9.5)	1.075 (27.3)	0.475 (12.1)	3.350 (85.1)	3	5000	B30-R6000
BBP33 Only	Fig. 1	B33-5-423	B-423	Gloss White	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R6000
BBP33 Only	Fig. 2	B33-43-423	B-423	Gloss White	1.250 (31.8)	0.250 (6.4)	-	0.350 (8.9)	1.450 (36.8)	1	5000	B30-R6000
BBP33 Only	Fig. 1	B33-29-423	B-423	Gloss White	1.250 (31.8)	0.375 (9.5)	1.300 (33.0)	0.475 (12.1)	2.750 (69.9)	2	5000	B30-R6000
BBP33 Only	Fig. 2	B33-45-423	B-423	Gloss White	1.500 (38.1)	0.250 (6.4)	-	0.350 (8.9)	1.700 (43.2)	1	5000	B30-R6000
BBP33 Only	Fig. 2	B33-72-423	B-423	Gloss White	1.750 (44.5)	0.250 (6.4)	-	0.350 (8.9)	1.950 (49.5)	1	5000	B30-R6000
BBP33 Only	Fig. 2	B33-53-423	B-423	Gloss White	2.000 (50.8)	0.500 (12.7)	-	0.600 (15.2)	2.200 (55.9)	1	2500	B30-R6000
BBP33 Only	Fig. 2	B33-17-423	B-423	Gloss White	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-18-423	B-423	Gloss White	3.000 (76.2)	1.000 (25.4)	-	1.125 (28.6)	3.200 (81.3)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-19-423	B-423	Gloss White	3.000 (76.2)	2.000 (50.8)	-	2.125 (54.0)	3.200 (81.3)	1	500	B30-R6000
BBP33 Only	Fig. 2	B33-55-423	B-423	Gloss White	4.000 (101.6)	2.000 (50.8)	-	2.125 (54.0)	4.200 (106.7)	1	750	B30-R6000
Standard adhesive (B-430 clear):												
BBP33 Only	Fig. 1	B33-5-430	B-430	Clear	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.625 (15.9)	3.350 (85.1)	3	5000	B30-R6000
BBP33 Only	Fig. 2	B33-17-430	B-430	Clear	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-18-430	B-430	Clear	3.000 (76.2)	1.000 (25.4)	-	1.125 (28.6)	3.200 (81.3)	1	1500	B30-R6000
Stronger adhesive for textured surfaces (B-422 gloss white):												
BBP33 Only	Fig. 1	B33-149-422	B-422	White	0.500 (12.7)	0.500 (12.7)	0.600 (15.2)	0.600 (15.2)	2.500 (63.5)	4	5000	B30-R6000
BBP33 Only	Fig. 1	B33-5-422	B-422	White	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R6000
BBP33 Only	Fig. 1	B33-147-422	B-422	White	1.500 (38.1)	0.375 (9.5)	1.650 (41.9)	0.475 (12.1)	3.350 (85.1)	2	2500	B30-R6000
BBP33 Only	Fig. 2	B33-102-422	B-422	White	1.500 (38.1)	0.375 (9.5)	-	0.500 (12.7)	1.700 (43.2)	1	2500	B30-R6000
BBP33 Only	Fig. 2	B33-136-422	B-422	White	1.500 (38.1)	0.750 (19.1)	-	0.875 (22.2)	1.700 (43.2)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-17-422	B-422	White	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-18-422	B-422	White	3.000 (76.2)	1.000 (25.4)	-	1.125 (28.6)	3.200 (81.3)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-19-422	B-422	White	3.000 (76.2)	2.000 (50.8)	-	2.125 (54.0)	3.200 (81.3)	1	500	B30-R6000
BBP33 Only	Fig. 2	B33-76-422	B-422	White	4.000 (101.6)	3.000 (76.2)	-	3.125 (79.4)	4.200 (106.7)	1	500	B30-R6000
Stronger adhesive for textured surfaces (B-432 clear):												
BBP33 Only	Fig. 1	B33-149-432	B-432	Clear	0.500 (12.7)	0.500 (12.7)	0.600 (15.2)	0.625 (15.9)	2.500 (63.5)	4	5000	B30-R6000
BBP33 Only	Fig. 1	B33-5-432	B-432	Clear	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R6000
BBP33 Only	Fig. 2	B33-17-432	B-432	Clear	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-18-432	B-432	Clear	3.000 (76.2)	1.000 (25.4)	-	1.125 (28.6)	3.200 (81.3)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-19-432	B-432	Clear	3.000 (76.2)	2.000 (50.8)	-	2.125 (54.0)	3.200 (81.3)	1	500	B30-R6000
Ultra aggressive adhesive for highly textured surfaces (B-483 gloss white):												
BBP33 Only	Fig. 1	B33-149-483	B-483	Gloss White	0.500 (12.7)	0.500 (12.7)	0.600 (15.2)	0.600 (15.2)	2.500 (63.5)	4	5000	B30-R6000
BBP33 Only	Fig. 1	B33-5-483	B-483	Gloss White	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R6000
BBP33 Only	Fig. 2	B33-17-483	B-483	Gloss White	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-7-483	B-483	Gloss White	2.750 (69.9)	1.250 (31.8)	-	1.375 (34.9)	2.950 (74.9)	1	1000	B30-R6000
BBP33 Only	Fig. 2	B33-18-483	B-483	Gloss White	3.000 (76.2)	1.000 (25.4)	-	1.125 (28.6)	3.200 (81.3)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-19-483	B-483	Gloss White	3.000 (76.2)	2.000 (50.8)	-	2.125 (54.0)	3.200 (81.3)	1	500	B30-R6000
BBP33 Only	Fig. 2	B33-55-483	B-483	Gloss White	4.000 (101.6)	2.000 (50.8)	-	2.125 (54.0)	4.200 (106.7)	1	750	B30-R6000
Ultra aggressive adhesive for highly textured surfaces (B-489 matte white):												
BBP33 Only	Fig. 1	B33-5-489	B-489	Matte White	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R4300
BBP33 Only	Fig. 2	B33-17-489	B-489	Matte White	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	1500	B30-R4300
BBP33 Only	Fig. 2	B33-18-489	B-489	Matte White	3.000 (76.2)	1.000 (25.4)	-	1.125 (28.6)	3.200 (81.3)	1	1500	B30-R4300
BBP33 Only	Fig. 2	B33-19-489	B-489	Matte White	3.000 (76.2)	2.000 (50.8)	-	2.125 (54.0)	3.200 (81.3)	1	500	B30-R4300
Polyester - Ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484):												
BBP33 Only	Fig. 2	B33-125-484	B-484	White	0.900 (22.9)	0.500 (12.7)	-	0.600 (15.2)	1.100 (27.9)	1	1500	B30-R6000
BBP33 Only	Fig. 1	B33-5-484	B-484	White	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R6000
BBP33 Only	Fig. 2	B33-136-484	B-484	White	1.500 (38.1)	0.750 (19.1)	-	0.875 (22.2)	1.700 (43.2)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-17-484	B-484	White	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-18-484	B-484	White	3.000 (76.2)	1.000 (25.4)	-	1.125 (28.6)	3.200 (81.3)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-19-484	B-484	White	3.000 (76.2)	2.000 (50.8)	-	2.125 (54.0)	3.200 (81.3)	1	500	B30-R6000

Benchtop Printers

B30 Series




B30 & B33 Series Materials

BradyID.com/s35

Metallized Polyester Labels (B-428, B-434, B-435, B-438, B-486, B-565)

- For product labeling, asset tracking and general industrial ID
- Silver metallic label withstands solvents and variable temperatures
- Ideal for serial number plates and rating plates with name-plate quality and metal-looking finish
- 3 adhesive strengths/gloss configurations to meet your needs

B-428: Service temp: -40°F to 293°F Agency approvals:
B-434: Service temp: -40°F to 194°F Agency approvals:
B-435: Service temp: -40°F to 194°F Agency approvals:
B-438: Service temp: -40°F to 104°F Agency approvals:
B-486: Service temp: -40°F to 248°F Agency approvals:
B-565: Service temp: -40°F to 240°F Agency approvals:



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard adhesive for smooth surfaces (B-428 matte):												
BBP33 Only	Fig. 1	B33-5-428	B-428	Matte Silver	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R4300
BBP33 Only	Fig. 2	B33-53-428	B-428	Matte Silver	2.000 (50.8)	0.500 (12.7)	-	0.600 (15.2)	2.200 (55.9)	1	2500	B30-R4300
BBP33 Only	Fig. 2	B33-17-428	B-428	Matte Silver	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	1500	B30-R4300
BBP33 Only	Fig. 2	B33-18-428	B-428	Matte Silver	3.000 (76.2)	1.000 (25.4)	-	1.125 (28.6)	3.200 (81.3)	1	1500	B30-R4300
BBP33 Only	Fig. 2	B33-19-428	B-428	Matte Silver	3.000 (76.2)	2.000 (50.8)	-	2.125 (54.0)	3.200 (81.3)	1	500	B30-R4300
BBP33 Only	Fig. 3	B33C-3000-428	B-428	Matte Silver	3.000 (76.2)	85 ft (25.9m)	-	-	3.400 (86.4)	1	roll (cont.)	B30-R4300
Standard adhesive for smooth surfaces (B-565 matte):												
BBP30, 31, 33, 35, 37	Fig. 3	B30C-1125-565-SL	B-565	Matte Silver	1.125 (28.6)	100 ft. (30.5m)	-	-	1.375 (34.9)	1	roll (cont.)	B30-R4300
BBP30, 31, 33, 35, 37	Fig. 3	B30C-2250-565-SL	B-565	Matte Silver	2.250 (57.5)	100ft. (30.5m)	-	-	2.500 (63.5)	1	roll (cont.)	B30-R4300
BBP30, 31, 33, 35, 37	Fig. 3	B30C-4000-565-SL	B-565	Matte Silver	4.000 (101.6)	100ft. (30.5m)	-	-	4.200 (106.7)	1	roll (cont.)	B30-R4300
Standard adhesive for smooth surfaces (B-435 glossy):												
BBP33 Only	Fig. 2	B33-18-435	B-435	Gloss Silver	3.000 (76.2)	1.000 (25.4)	-	1.125 (28.6)	3.200 (81.3)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-19-435	B-435	Gloss Silver	3.000 (76.2)	2.000 (50.8)	-	2.125 (54.0)	3.200 (81.3)	1	500	B30-R6000
BBP33 Only	Fig. 2	B33-55-435	B-435	Gloss Silver	4.000 (101.6)	2.000 (50.8)	-	2.125 (54.0)	4.200 (106.7)	1	750	B30-R6000
Stronger adhesive for rougher surfaces (B-434 glossy):												
BBP33 Only	Fig. 1	B33-5-434	B-434	Gloss Silver	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R6000
BBP33 Only	Fig. 2	B33-136-434	B-434	Gloss Silver	1.500 (38.1)	0.750 (19.1)	-	0.875 (22.2)	1.700 (43.2)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-17-434	B-434	Gloss Silver	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-18-434	B-434	Gloss Silver	3.000 (76.2)	1.000 (25.4)	-	1.125 (28.6)	3.200 (81.3)	1	1500	B30-R6000
BBP33 Only	Fig. 2	B33-19-434	B-434	Gloss Silver	3.000 (76.2)	2.000 (50.8)	-	2.125 (54.0)	3.200 (81.3)	1	500	B30-R6000
BBP33 Only	Fig. 2	B33-55-434	B-434	Gloss Silver	4.000 (101.6)	2.000 (50.8)	-	2.125 (54.0)	4.200 (106.7)	1	750	B30-R6000
Ultra aggressive adhesive for highly textured, powder coated and low surface energy surfaces (B-486 matte):												
BBP33 Only	Fig. 2	B33-59-486	B-486	Matte Silver	1.000 (25.4)	0.500 (12.7)	-	0.600 (15.2)	1.200 (30.5)	1	2500	B30-R4300
BBP33 Only	Fig. 1	B33-5-486	B-486	Matte Silver	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R4300
BBP33 Only	Fig. 2	B33-53-486	B-486	Matte Silver	2.000 (50.8)	0.500 (12.7)	-	0.600 (15.2)	2.200 (55.9)	1	2500	B30-R4300
BBP33 Only	Fig. 2	B33-17-486	B-486	Matte Silver	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	1300	B30-R4300
BBP33 Only	Fig. 2	B33-7-486	B-486	Matte Silver	2.750 (69.9)	1.250 (31.8)	-	1.375 (34.9)	2.950 (74.9)	1	1000	B30-R4300
BBP33 Only	Fig. 2	B33-18-486	B-486	Matte Silver	3.000 (76.2)	1.000 (25.4)	-	1.125 (28.6)	3.200 (81.3)	1	1300	B30-R4300
BBP33 Only	Fig. 2	B33-19-486	B-486	Matte Silver	3.000 (76.2)	2.000 (50.8)	-	2.125 (54.0)	3.200 (81.3)	1	500	B30-R4300
BBP33 Only	Fig. 2	B33-76-486	B-486	Matte Silver	4.000 (101.6)	3.000 (76.2)	-	3.125 (79.4)	4.200 (106.7)	1	500	B30-R4300
BBP33 Only	Fig. 2	B33-161-486	B-486	Matte Silver	4.000 (101.6)	4.000 (101.6)	-	4.125 (104.8)	4.200 (106.7)	1	250	B30-R4300

Benchtop Printers

B30 Series

B30 & B33 Series Materials

BradyID.com/s35

Standard Polyimide Labels (B-724, B-727)

- Top or bottom-side component ID or board ID labels that withstand the various processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards

B-727: Service temp: -94°F to 212°F (short burst max temp: 80 sec at 572°F, 5 min at 500°F, 2 hrs at 338°F)
Agency approvals: RoHS

B-724: Service temp: -94°F to 518°F (short burst max temp: 80 sec at 626°F, 5 min at 536°F)
Agency approvals:




Figure 1




Figure 2



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard temperature (B-727 gloss white):												
BBP33 Only	Fig. 1	B33-11-727	B-727	Gloss White	0.250 (6.35)	0.250 (6.4)	0.25 (6.4)	0.375 (9.5)	3.200 (81.3)	12	5000	B30-R6000
BBP33 Only	Fig. 1	B33-38-727	B-727	Gloss White	0.375 (9.5)	0.375 (9.5)	0.438 (11.1)	0.475 (12.1)	3.200 (81.3)	9	5000	B30-R6000
BBP33 Only	Fig. 1	B33-149-727	B-727	Gloss White	0.500 (12.7)	0.500 (12.7)	0.600 (15.2)	0.600 (15.2)	2.500 (63.5)	4	5000	B30-R6000
BBP33 Only	Fig. 1	B33-1-727	B-727	Gloss White	0.750 (19.1)	0.250 (6.4)	0.800 (20.3)	0.350 (8.9)	3.350 (85.1)	4	5000	B30-R6000
BBP33 Only	Fig. 2	B33-49-727	B-727	Gloss White	0.900 (22.9)	0.250 (6.4)	-	0.350 (8.9)	1.100 (27.9)	1	5000	B30-R6000
BBP33 Only	Fig. 1	B33-2-727	B-727	Gloss White	0.900 (22.9)	0.250 (6.4)	1.125 (28.6)	0.350 (8.9)	3.350 (85.1)	3	5000	B30-R6000
BBP33 Only	Fig. 2	B33-103-727	B-727	Gloss White	1.000 (25.4)	0.250 (6.4)	-	0.350 (8.9)	1.200 (30.5)	1	5000	B30-R6000
BBP33 Only	Fig. 2	B33-58-727	B-727	Gloss White	1.000 (25.4)	0.375 (9.5)	-	0.475 (12.1)	1.200 (30.5)	1	4000	B30-R6000
BBP33 Only	Fig. 2	B33-59-727	B-727	Gloss White	1.000 (25.4)	0.500 (12.7)	-	0.600 (15.2)	1.200 (30.5)	1	2500	B30-R6000
BBP33 Only	Fig. 2	B33-43-727	B-727	Gloss White	1.250 (31.8)	0.250 (6.4)	-	0.350 (8.9)	1.450 (36.8)	1	5000	B30-R6000
BBP33 Only	Fig. 2	B33-44-727	B-727	Gloss White	1.375 (34.9)	0.250 (6.4)	-	0.350 (8.9)	1.600 (40.6)	1	5000	B30-R6000
BBP33 Only	Fig. 2	B33-45-727	B-727	Gloss White	1.500 (38.1)	0.250 (6.4)	-	0.350 (8.9)	1.700 (43.2)	1	5000	B30-R6000
BBP33 Only	Fig. 2	B33-72-727	B-727	Gloss White	1.750 (44.5)	0.250 (6.4)	-	0.350 (8.9)	1.950 (49.5)	1	5000	B30-R6000
Extremely high temperature (B-724 matte amber):												
BBP33 Only	Fig. 1	B33-149-724	B-724	Matte Amber	0.500 (12.7)	0.500 (12.7)	0.600 (15.2)	0.600 (15.2)	2.500 (63.5)	4	5000	B30-R4300
BBP33 Only	Fig. 2	B33-46-724	B-724	Matte Amber	0.750 (19.1)	0.250 (6.4)	-	0.350 (8.9)	0.950 (24.1)	1	5000	B30-R4300
BBP33 Only	Fig. 1	B33-1-724	B-724	Matte Amber	0.750 (19.1)	0.250 (6.4)	0.800 (20.3)	0.350 (8.9)	3.350 (85.1)	4	5000	B30-R4300
BBP33 Only	Fig. 1	B33-2-724	B-724	Matte Amber	0.900 (22.9)	0.250 (6.4)	1.125 (28.6)	0.350 (8.9)	3.350 (85.1)	3	5000	B30-R4300
BBP33 Only	Fig. 2	B33-43-724	B-724	Matte Amber	1.250 (31.8)	0.250 (6.4)	-	0.350 (8.9)	1.450 (36.8)	1	5000	B30-R4300
BBP33 Only	Fig. 1	B33-4-724	B-724	Matte Amber	1.500 (38.1)	0.250 (6.4)	-	0.350 (8.9)	3.350 (85.1)	2	5000	B30-R4300

Static Dissipative Polyimide Labels (B-717, B-718, B-719)

- Circuit board and electronic component ID with static dissipative adhesive and release liner with surface resistivity values recommended for dissipative ESD packaging
- Complies with EIA-541 Packaging Material Standards for ESD Sensitive Items
- For top or bottom-side component or board identification

All: Service temp: -94°F to 212°F (short burst max temp: 80 sec at 572°F, 5 min at 500°F, 2 hrs at 338°F)
Agency approvals: RoHS




Figure 1




Figure 2



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard thickness (B-717 gloss white):												
BBP33 Only	Fig. 2	B33-46-717	B-717	Gloss White	0.750 (19.1)	0.250 (6.4)	-	0.350 (8.9)	0.950 (24.1)	1	5000	B30-R6000
BBP33 Only	Fig. 2	B33-103-717	B-717	Gloss White	1.000 (25.4)	0.250 (6.4)	-	0.350 (8.9)	1.200 (30.5)	1	5000	B30-R6000
BBP33 Only	Fig. 2	B33-43-717	B-717	Gloss White	1.250 (31.8)	0.250 (6.4)	-	0.350 (8.9)	1.450 (36.8)	1	5000	B30-R6000
BBP33 Only	Fig. 2	B33-45-717	B-717	Gloss White	1.500 (38.1)	0.250 (6.4)	-	0.350 (8.9)	1.700 (43.2)	1	5000	B30-R6000
Low profile label (B-718 gloss white):												
BBP33 Only	Fig. 4	B33-11-718	B-718	Gloss White	0.250 (6.4)	0.250 (6.4)	0.250 (6.4)	0.375 (9.5)	3.200 (81.3)	12	1500	B30-R6000
BBP33 Only	Fig. 1	B33-38-718	B-718	Gloss White	0.375 (9.5)	0.375 (9.5)	0.438 (11.1)	0.475 (12.1)	3.200 (81.3)	9	5000	B30-R6000
BBP33 Only	Fig. 1	B33-149-718	B-718	Gloss White	0.500 (12.7)	0.500 (12.7)	0.600 (15.2)	0.600 (15.2)	2.500 (63.5)	4	5000	B30-R6000
BBP33 Only	Fig. 1	B33-1-718	B-718	Gloss White	0.750 (19.1)	0.250 (6.4)	0.800 (20.3)	0.350 (8.9)	3.350 (85.1)	4	5000	B30-R6000
BBP33 Only	Fig. 2	B33-46-718	B-718	Gloss White	0.750 (19.1)	0.250 (6.4)	-	0.350 (8.9)	0.950 (24.1)	1	5000	B30-R6000
BBP33 Only	Fig. 2	B33-49-718	B-718	Gloss White	0.900 (22.9)	0.250 (6.4)	-	0.350 (8.9)	1.100 (27.9)	1	5000	B30-R6000
BBP33 Only	Fig. 2	B33-43-718	B-718	Gloss White	1.250 (31.8)	0.250 (6.4)	-	0.350 (8.9)	1.450 (36.8)	1	5000	B30-R6000
BBP33 Only	Fig. 2	B33-45-718	B-718	Gloss White	1.500 (38.1)	0.250 (6.4)	-	0.350 (8.9)	1.700 (43.2)	1	5000	B30-R6000
BBP33 Only	Fig. 2	B33-72-718	B-718	Gloss White	1.750 (44.5)	0.250 (6.4)	-	0.350 (8.9)	1.950 (49.5)	1	5000	B30-R6000
Low profile label - Matte white to prevent sticking of solder balls (B-719 matte white):												
BBP33 Only	Fig. 1	B33-38-719	B-719	Matte White	0.375 (9.5)	0.375 (9.5)	0.438 (11.1)	0.475 (12.1)	3.200 (81.3)	9	5000	B30-R6000
BBP33 Only	Fig. 2	B33-46-719	B-719	Matte White	0.750 (19.1)	0.250 (6.4)	-	0.350 (8.9)	0.950 (24.1)	1	5000	B30-R6000
BBP33 Only	Fig. 1	B33-2-719	B-719	Matte White	0.900 (22.9)	0.250 (6.4)	1.125 (28.6)	0.350 (8.9)	3.350 (85.1)	3	5000	B30-R6000
BBP33 Only	Fig. 2	B33-43-719	B-719	Matte White	1.250 (31.8)	0.250 (6.4)	-	0.350 (8.9)	1.450 (36.8)	1	5000	B30-R6000

B30 & B33 Series Materials

BradyID.com/s35

Product ID Materials

- A variety of polyester and specialty materials in wide format rolls designed for shape cutting multiple labels out of a single continuous roll (BBP37 required for shape cutting)
- Ideal for smaller volume custom Product ID and general industrial labels
- Proven materials with agency approvals for Product ID and asset tracking applications




Figure 2




Figure 3



- B-424:** Paper
- B-423:** Polyester w/standard adhesive
- B-428:** Metallized Polyester w/standard adhesive for smooth surfaces
- B-432:** Polyester w/ stronger adhesive
- B-434:** Metallized Polyester w/stronger adhesive for textured surfaces
- B-437:** Tedlar® for high temp labeling & cable wraps
- B-480:** Non-Metal polyester with rubber-based adhesive for oily/greasy surfaces
- B-483:** Polyester w/ ultra-aggressive adhesive for rough surfaces
- B-484:** Polyester w/ ultra-aggressive adhesive and pliability for angular surfaces
- B-489:** Polyester w/ ultra-aggressive adhesive for rough surfaces
- B-488:** Polyester w/ standard adhesive and chemical resistance
- B-486:** Metallized Polyester w/ultra-aggressive adhesive for rougher surfaces
- B-565:** Metallized polyester w/ standard adhesive
- B-595:** Indoor/Outdoor vinyl
- B-724:** Polyimide label for extremely high temperatures
- B-727:** Polyimide label for standard temperatures
- B-787:** Polyvinyl flouride tape

- Matte Bright White Service temp: -40°F to 124°F
- Gloss White Service temp: -94°F to 248°F
- Matte Silver Service temp: -40°F to 293°F
- Clear Service temp: -40°F to 212°F
- Gloss Silver Service temp: -40°F to 194°F
- Satin Light Gray Service temp: -94°F to 248°F
- Gloss White Service temp: -94°F to 248°F
- Gloss White Service temp: -40°F to 240°F
- Matte White Service temp: -94°F to 248°F
- Matte White Service temp: -40°F to 320°F
- Matte Silver Service temp: -40°F to 248°F
- Matte Silver Service temp: -40°F to 240°F
- Semi-Gloss White Service temp: -40°F to 180°F
- Matte Amber Service temp: -94°F to 518°F
- Gloss White Service temp: -94°F to 212°F
- Gloss White Service temp: -94°F to 212°F

- RoHS
- RoHS
- RoHS
- RoHS
- RoHS
- RoHS
- RoHS
- RoHS
- RoHS
- RoHS
- RoHS
- RoHS
- RoHS
- RoHS
- RoHS
- RoHS
- RoHS
- RoHS
- RoHS

Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP35, 37 Only	Fig. 3	B30C-4000-423	B-423	White	4.000 (101.6)	150 ft. (45.7 m)	1 roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 3	B30C-4000-424	B-424	White	4.000 (101.6)	150 ft. (45.7 m)	1 roll (cont.)	B30-R4300
BBP35, 37 Only	Fig. 3	B30C-4000-428	B-428	Silver	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)	B30-R4300
BBP35, 37 Only	Fig. 3	B30C-4000-432	B-432	Clear	4.000 (101.6)	120 ft. (36.6 m)	1 roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 3	B30C-4000-434	B-434	Silver	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 3	B30C-4000-437	B-437	White	4.000 (101.6)	150 ft. (45.7 m)	1 roll (cont.)	B30-R4300
BBP35, 37 Only	Fig. 3	B30C-4000-480	B-480	Light Gray	4.000 (101.6)	115 ft. (35.1 m)	1 roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 3	B30C-4000-483	B-483	White	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 3	B30C-4000-484	B-484	White	4.000 (101.6)	150 ft. (45.7 m)	1 roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 3	B30C-4000-486	B-486	Silver	4.000 (101.6)	115 ft. (35.1 m)	1 roll (cont.)	B30-R4300
BBP35, 37 Only	Fig. 3	B30C-4000-488	B-488	White	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)	B30-R4300
BBP35, 37 Only	Fig. 3	B30C-4000-489	B-489	White	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)	B30-R4300
BBP30, 31, 33, 35, 37	Fig. 3	B30C-4000-565-SL	B-565	Silver	4.000 (101.6)	100 ft. (30.4 m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 3	B30C-4000-595-WT	B-595	White	4.000 (101.6)	100 ft. (30.4 m)	1 roll (cont.)	B30-R10000
BBP35, 37 Only	Fig. 3	B30C-4000-724	B-724	Amber	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)	B30-R4300
BBP35, 37 Only	Fig. 3	B30C-4000-727	B-727	White	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)	B30-R6000
BBP35, 37 Only	Fig. 3	B30C-4000-787	B-787	White	4.000 (101.6)	60 ft. (18.3 m)	1 roll (cont.)	B30-R6000

Tamper-Evident Asset ID Labels (B-438)

- Leaves checkerboard footprint on surface and on label if removed to prevent re-use




Figure 2




Figure 3



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP30, 31, 33, 35, 37	Fig. 2	B30-17-438	B-438	Matte Silver	2.000 (50.8)	1.000 (25.4)	2.500 (63.5)	1.125 (28.6)	1	1225	B30-R4300
BBP30, 31, 33, 35, 37	Fig. 2	B30-18-438	B-438	Matte Silver	3.000 (76.2)	1.000 (25.4)	3.250 (82.6)	1.250 (31.8)	1	1225	B30-R4300
BBP30, 31, 33, 35, 37	Fig. 2	B30-222-438	B-438	Matte Silver	3.000 (76.2)	2.000 (50.8)	3.250 (82.6)	2.250 (57.2)	1	650	B30-R4300
BBP30, 31, 33, 35, 37	Fig. 3	B30C-3000-438-SL	B-438	Matte Silver	3.000 (76.2)	100 ft. (30.5m)	-	3.250 (82.6)	1 roll (cont.)		B30-R4300

B30 Series Material Starter Kits

BradyID.com/s35



B30 Series Supply Starter Kits

Get started right and save a little too with a Brady supply starter kit! Packages of most commonly used labels and ribbons for the most common labeling applications. Just enough supplies to ensure you have what you need to get going on that project

All Supply Kits compatible with the BBP30, 31, 33, 35 and 37 printers unless otherwise noted.



Basic Supply Starter Kit

Kit Includes:

- (1) B30C-4000-595-YL - 4" Yellow Vinyl
- (1) B30C-4000-595-WT - 4" White Vinyl
- (1) B30C-2250-595-RD - 2.25" Red Vinyl
- (1) B30-R10000 - Black Print Ribbon
- (1) B30-R10000-WT - White Print Ribbon

Printer sold separately.

Catalog #	Description
146069	Basic Supply Starter Kit - Small



Gauge Label Supply Kit for BBP37 Printer*

Kit Includes:

- (2) B30C-4000-595-WT - 4" White Vinyl
- (2) B30-R10000-GR-8 - Green & Red Paneled Print Ribbon - 8" Panel length

BBP37 model needed to print cut gauge label supplies. Printer sold separately.

Catalog #	Description
146070	Gauge Label Supply Kit - Small

Benchtop Printers



Arc Flash Supply Kit

LARGE Kit Includes:

- (2) B30-25-595-ANSIWA - 4" x 6" B-595 ANSI Warning Header
- (1) B30-241-595-ANSIWA - 2.25" x 3" B-595 ANSI Warning Header
- (1) B30EP-174-593-WT - 1" x 4" B-593 White Raised Panel Label
- (1) B30C-2250-595-OR - 2.25" B-595 Orange Vinyl
- (3) B30-R10000 - Black Print Ribbon

SMALL Kit Includes:

- (2) B30-25-595-ANSIWA - 4" x 6" ANSI Warning Header Roll
- (1) B30-R10000 - Black Print Ribbon

Printer sold separately unless otherwise noted.

Catalog #	Description
142061	Arc Flash Warning Supply Kit - Large
146071	Arc Flash Warning Supply Kit - Small
BBP31-ARCFLASH-KIT	BBP31 Printer with Large Arc Flash Warning Supply Kit



GHS Supply Kit

LARGE Kit Includes:

- (1) B30-262-7569-CLP4B - 4" x 6" GHS label w/L4B four-diamond
- (2) B30-261-7569-CLP4B - 3" x 4" GHS label w/L4B four-diamond
- (1) B30-260-7569-CLP4B - 2" x 3" GHS label w/L4B four-diamond
- (3) B30-R10000 - Black Print Ribbon

SMALL Kit Includes:

- (2) B30-262-7569-CLP4B - 4" x 6" GHS label w/L4B four-diamond
- (1) B30-R10000 - Black Print Ribbon

Printer sold separately.

Catalog #	Description
146072	GHS Supply Kit - Large
146073	GHS Supply Kit - Small

B30 Series

B30 Series Material Starter Kits

BradyID.com/s35

All Supply Kits compatible with the BBP30, 31, 33, 35 and 37 printers unless otherwise noted.



Safety & Compliance Supply Kit

Kit Includes:

- (1) B30-25-595-ANSIDA - 4" x 6" B-595 ANSI Danger Header
- (1) B30-25-595-ANSIWA - 4" x 6" B-595 ANSI Warning Header
- (1) B30-25-595-ANSICA - 4" x 6" B-595 ANSI Caution Header
- (1) B30-25-595-ANSINO - 4" x 6" B-595 ANSI Notice Header
- (1) B30C-4000-526 - 4" B-526 Photoluminescent
- (1) B30-263-595-NFFPA - 4" x 6" B-595 RTK NFPA
- (2) B30-R10000 - Black Print Ribbon
- (1) B30-R10000-RD - Red Print Ribbon

Printer sold separately unless otherwise noted.

Catalog #	Description
142062	Safety & Compliance Supply Kit - Large
BBP31-SFTY-KIT	BBP31 Printer w/ Safety & Compliance Supply Kit



5S Visual Workplace Supply Kit

Kit Includes:

- (1) B30C-4000-595-WT - 4" B-595 White Vinyl
- (1) B30C-2250-595-WT - 2.25" B-595 White Vinyl
- (1) B30C-4000-595-YL - 4" B-595 Yellow Vinyl
- (1) B30C-2250-595-YL - 2.25" B-595 Yellow Vinyl
- (1) B30C-2250-581-WT - 2.25" B-581 Repositionable Vinyl
- (1) B30C-1125-581-WT - 1.125" B-581 Repositionable Vinyl
- (1) B30C-2500-509-WT - 2.25" Magnetic Vinyl
- (1) 142133 - Blank Valve Tag Variety Pack
- (1) B30-219-595-BLNKWT - Die Cut Labels for Valve Tags
- (1) B30-25-595-ANSIWA - 4" x 6" B-595 Caution Header
- (2) B30-R10000 - Black Print Ribbon
- (1) B30-R10000-RD - Red Print Ribbon
- (1) B30-R10000-GN - Green Print Ribbon
- (1) B30-R10000-BL - Blue Print Ribbon

Printer sold separately unless otherwise noted.

Catalog #	Description
142063	5S Visual Workplace Supply Kit - Large
BBP31-LEANWV-KIT	BBP31 Printer w/ 5S Visual Workplace Supply Kit



Pipe Identification Supply Kit

Kit Includes:

- (1) B30C-4000-595-YL - 4" B-595 Yellow Vinyl
- (1) B30C-2250-595-YL - 2.25" B-595 Yellow Vinyl
- (1) B30C-1125-595-YL - 1.125" B-595 Yellow Vinyl
- (1) B30C-4000-595-GN - 4" B-595 Green Vinyl
- (1) B30C-2250-595-GN - 2.25" B-595 Green Vinyl
- (1) B30C-1125-595-GN - 1.125" B-595 Green Vinyl
- (1) B30C-1125-595-BL - 1.125" B-595 Blue Vinyl
- (1) B30C-2250-595-RD - 2.25" B-595 Red Vinyl
- (1) B30C-1125-595-RD - 1.125" B-595 Red Vinyl
- (1) B30EP-174-593-BK - 1" x 4" B-593 Black Raised Panel
- (1) 142133 - Blank Valve Tag Variety Pack
- (1) B30-242-595-BLNKWT - Small Die Cut Labels for Valve Tags
- (3) B30-R10000 - Black Print Ribbon
- (2) B30-R10000-WT - White Print Ribbon

Printer sold separately unless otherwise noted.

Catalog #	Description
142064	Pipe ID Supply Kit - Large
BBP31-PIPE-KIT	BBP31 Printer w/ Pipe ID Supply Kit



General Industrial & 5S Supply Kit

Kit Includes:

- (1) B30C-4000-595-WT - 4" B-595 White
- (1) B30C-2250-595-WT - 2.25" B-595 White
- (1) B30C-1125-595-WT - 1.125" B-595 White Vinyl
- (1) B30C-4000-595-YL - 4" B-595 Yellow Vinyl
- (1) B30C-2250-595-YL - 2.25" B-595 Yellow Vinyl
- (1) B30C-1125-595-YL - 1.125" B-595 Yellow Vinyl
- (1) B30EP-177-593-BK - 2.5" x 3" B-593 Black Raised Panel
- (1) B30-25-595-ANSIDA - 4" x 6" B-595 ANSI Danger Header
- (1) B30-25-595-ANSICA - 4" x 6" B-595 ANSI Caution Header
- (1) B30C-2250-584-YL - 2.25" Reflective Yellow
- (1) B30C-4250-551-WT - 4.25" White Tag Stock
- (2) B30-R10000 - Black Print Ribbon
- (1) B30-R10000-WT - White Print Ribbon
- (1) B30-R10000-RD - Red Print Ribbon

Printer sold separately unless otherwise noted.

Catalog #	Description
142065	General Industrial & 5S Supply Kit - Large
BBP31-GENIND-KIT	BBP31 Printer w/ General Industrial 5S Supply Kit

B30 Series Print Ribbons

BradyID.com/s35

Print Ribbons for BBP®30, BBP®31, BBP®33, BBP®35 & BBP®37

“Drop & Click” print ribbons for 5 second ribbon supply changes

- Tough, smear-proof ribbons that produce long-lasting printed text and can withstand years in industrial areas and outdoor conditions
- Self-contained cartridges drop straight into printer with a “click”
- No calibrating, no threading, no wasted feeding, no hassles and the ink will always be facing the right direction!
- Printer notifies user if installed ribbon is not recommended for installed labels



Ribbon installs in 5 seconds...snaps into place!

Print Ribbon / Label Material Compatibility

B-# Material	B30-R4300 (Black)	B30-R6000 (Black)	B30-R6200 (Black)	B30-R6400 (Black)	B30-R6600 (Black)	B30-R10000 (Black)	B30-R4500-SV* (Silver)	B30-R4400-WT (White)	B30-R6700-WT* (White)	B30-R10000-WT (White)	B30-R10000-YL (Yellow)	B30-R10000-YL2 (Yellow)	B30-R10000 (Colors)
B-342	Permasleeves	●	-	-	-	-	●*	-	-	-	-	-	-
B-344	Permasleeves	-	-	-	-	●	-	-	●*	-	-	-	-
B-345	Permasleeves	-	●	-	-	-	-	●	-	-	-	-	-
B-423	Glossy White Polyester	-	●	●	-	-	-	-	-	-	-	-	-
B-424	Matte White Paper	●	-	-	-	-	-	-	-	-	-	-	-
B-425	Polypropylene	●	-	-	●	-	-	-	-	-	-	-	-
B-428	Metallized Polyester	●	-	-	-	-	-	-	-	-	-	-	-
B-432	Glossy Clear Polyester	-	●	-	-	-	-	●	-	-	-	-	-
B-434	Glossy Metallized Polyester	-	●	-	-	-	-	-	-	-	-	-	-
B-437	Tedlar®	●	-	-	-	-	-	-	-	-	-	-	-
B-438	Tamper Evident Metallized Polyester	●	-	-	-	-	-	-	-	-	-	-	-
B-480	Polyester Rubber-Based Adhesive	-	●	-	-	-	-	●	-	-	-	-	-
B-483	Glossy White Polyester	-	●	-	-	-	-	-	-	-	-	-	-
B-483	ToughStripe®	-	●	-	-	-	-	●	-	-	-	-	-
B-484	Glossy White Polyester	-	●	-	-	-	-	-	-	-	-	-	-
B-486	Matte Metallized Polyester	●	-	-	-	-	-	-	-	-	-	-	-
B-488	Matte White Polyester	●	-	-	-	-	-	-	-	-	-	-	-
B-489	Matte White Polyester	●	-	-	-	-	-	-	-	-	-	-	-
B-509	Printable Magnetic	-	-	-	-	●	-	-	-	-	-	-	●**
B-526	Photoluminescent Polyester	-	-	-	-	●	-	-	-	-	-	-	●**
B-549	Cold Temperature Polyester	-	-	-	-	●	-	-	●	-	-	-	●**
B-551	Non-Adhesive Tag	-	-	-	-	●	-	-	-	-	-	-	●**
B-565	Metallized Polyester	-	-	-	-	●	-	-	-	-	-	-	-
B-569	Low-Halide Polyester	-	-	-	-	●	-	-	-	●	-	-	●**
B-581	Repositionable Vinyl	-	-	-	-	●	-	-	-	●	-	-	●**
B-584	Retro Reflective	-	-	-	-	●	-	-	-	-	-	-	●**
B-593	Raised Panel	-	●	-	-	-	-	●	-	-	-	-	-
B-595	Outdoor Vinyl	-	-	-	-	●	-	-	●	●***	●***	●**	●**
B-854	Toughwash™ Metal Detectable	-	●	-	-	-	-	-	-	-	-	-	-
B-855	Toughwash™	-	●	-	-	-	-	-	-	-	-	-	-
B-724	Matte Amber Polyimide	●	-	-	-	-	-	-	-	-	-	-	-
B-727	Glossy White Polyimide	-	●	-	-	-	-	-	-	-	-	-	-
B-787	Glossy White Polyvinyl Fluoride	-	●	-	-	-	-	-	-	-	-	-	-
B-7569	Vinyl Film	-	-	-	-	●	-	-	-	-	-	-	-
B-7642	Permasleeves	●	-	-	●	-	-	-	-	-	-	-	-

Refer to the corresponding Tech Data Sheets for complete material information at BradyID.com/techdata.

* B30-R4500-SV ribbon for use with B-342 black PermaSleeves® only; B30-R6700-WT ribbon for use with B-345 black PermaSleeves® only.

**Colored ribbons optimized for use on white material. Test use on other material colors for suitability to your application.

***Use B30-R10000-YL for printing yellow onto white. Use B30-R10000-YL2 for printing yellow onto other colors of B-595.

B30 Series Print Ribbons

BradyID.com/s35

Single Color Print Ribbons

- Solid color ribbons for printing a single color onto a label
- Can be swapped out for printing multi-color labels on BBP35 or BBP37 printer if a paneled multi-color ribbon is not on-hand



Fits Printer Model(s)	Catalog #	Color	Size Inch (mm)	Length Feet (m)
BBP30, 31, 33, 35, 37	B30-R10000	Black	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R6000	Black	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R6200	Black	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R6400	Black	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R6600	Black	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R4300	Black	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R10000-WT	White	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R4400-WT	White	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R6700-WT	White*	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R4500-SV	Silver*	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R10000-RD	Red	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R10000-GN	Green	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R10000-BL	Blue	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R10000-YL	Yellow**	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R10000-YL2	Yellow**	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R10000-OR	Orange	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R10000-MA	Magenta	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R10000-PRCCY	Process Cyan***	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R10000-PRCYEL	Process Yellow***	4.330 (109.9)	200 ft. (60.9 m)
BBP30, 31, 33, 35, 37	B30-R10000-PRCMAG	Process Magenta***	4.330 (109.9)	200 ft. (60.9 m)


* B30-R4500-SV ribbon for use with B-342 black PermaSleeves® only; B30-R6700-WT ribbon for use with B-345 black PermaSleeves® only.

** B30-R10000-YL for printing yellow onto white. B30-R10000-YL2 for printing yellow onto other colors of B-595.

*** Process ribbons print a much lighter shade - designed to be used together with other process ribbons and black ribbon to lay down a dot pattern for printing "blended" colors and process color objects with the BBP35 or BBP37 printers.

BBP®35 & BBP®37 Multi-Color "Paneled" Print Ribbons

- Ribbons have panels of 2- or 4-different colors for printing multiple colors onto a label
- Use CMYK ribbon for printing blended colors. Blended colors are not as saturated as solid or spot color paneled ribbons, but do offer a broader palette of available colors and shades
- Print multiple colors without having to swap in multiple ribbons

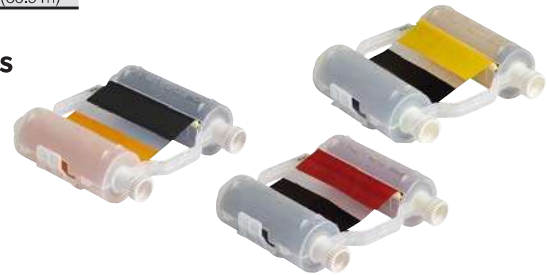

Two Color Print Ribbons

Fits Printer Model(s)	Catalog #	Color	Size Inch (mm)	Length Feet (m)
8" panel length - Typical yield: 100 panel sets per roll				
BBP35, 37 Only	B30-R10000-KR-8	Black and Red	4.330 (101.9) x 8.000 (203.2) Panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KY-8	Black and Yellow	4.330 (101.9) x 8.000 (203.2) Panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KB-8	Black and Blue	4.330 (101.9) x 8.000 (203.2) Panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KO-8	Black and Orange	4.330 (101.9) x 8.000 (203.2) Panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KG-8	Black and Green	4.330 (101.9) x 8.000 (203.2) Panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-GR-8	Green and Red	4.330 (101.9) x 8.000 (203.2) Panels	200 ft. (60.9 m)
16" panel length - Typical yield: 60 panel sets per roll				
BBP35, 37 Only	B30-R10000-KR-16	Black and Red	4.330 (101.9) x 16.000 (406.4) Panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KY-16	Black and Yellow	4.330 (101.9) x 16.000 (406.4) Panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KB-16	Black and Blue	4.330 (101.9) x 16.000 (406.4) Panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KO-16	Black and Orange	4.330 (101.9) x 16.000 (406.4) Panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KG-16	Black and Green	4.330 (101.9) x 16.000 (406.4) Panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-RB-16	Red and Blue	4.330 (101.9) x 16.000 (406.4) Panels	200 ft. (60.9 m)

Four Color Print Ribbons

Fits Printer Model(s)	Catalog #	Color	Size Inch (mm)	Length Feet (m)
8" panel length - Typical yield: 50 panel sets per roll				
BBP35, 37 Only	B30-R10000-KRGB-8	Black, Red, Green and Blue	4.330 (101.9) x 8.000 (203.2) Panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KRYG-8	Black, Red, Yellow and Green	4.330 (101.9) x 8.000 (203.2) Panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KRYB-8	Black, Red, Yellow and Blue	4.330 (101.9) x 8.000 (203.2) Panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KRBO-8	Black, Red, Blue and Orange	4.330 (101.9) x 8.000 (203.2) Panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-CMYK-8	Process Cyan, Mgnta, Yell, Blk	4.330 (101.9) x 8.000 (203.2) Panels	200 ft. (60.9 m)
16" panel length - Typical yield: 30 panel sets per roll				
BBP35, 37 Only	B30-R10000-KRGB-16	Black, Red, Green and Blue	4.330 (101.9) x 16.000 (406.4) Panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KRYB-16	Black, Red, Yellow and Blue	4.330 (101.9) x 16.000 (406.4) Panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-CMYK-16	Black, Cyan, Magenta, Yellow **	4.330 (101.9) x 16.000 (406.4) Panels	200 ft. (60.9 m)

** Process ribbons print a much lighter shade - designed to be used together with other process ribbons and black ribbon to lay down a dot pattern for printing "blended" colors and process color objects.